



# SPECIFICATION OF PRODUCT 承认书

CUSTOMER:		
DESCRIPTION:	Magnetic Buzzer	-
FUSHENG P/N:	FUET-5525	
CUSTOMER P/N:		
DATE:	2021-8-28	

CUSTOMER	APPROVER	CHECKER
	Yunqing Wu	Bing Yan

# 泰州福声电子科技有限公司

地址:江苏省泰州市海陵区凤凰西路98号

电话:0086-523-86219066 传真:0086-523-81601108

邮箱: sales@electronic-tech.cn

网址: www.tzfsdz.com


#### A. SCOPE

This specification applies magnetic buzzer, FUET-5525

### **B. SPECIFICATION**

No.	Item	Unit	Specification	Condition
1	Oscillation Frequency	Hz	3100	Vo-p=1/2duty, square wave
2	Operating Voltage	Vo-p	2.5~4.5	
3	Rated Voltage	Vo-p	3	
4	Current Consumption	mA	MAX 120	at Rated Voltage
5	Sound Pressure Level	dB	MIN:85言科‡	at 5cm at Rated Voltage
6	Coil Resistance	Ω	10£1.5 NG TECHNOLO	DGY
7	Operating Temperature	c	-40 ~ <del>+</del> 85	支
8	Storage Temperature	C	-40° +85 TECHNOLO	) GY
9	Dimension	mm	5.5 x 5.5 x H2.5	See appearance drawing
10	Weight (MAX)	gram	0.8	54
11	Housing Material		LCP(Black)	
12	Leading Pin		Tin Plated Brass(Sn)	See appearance drawing
13	Environmental Protection Regulation		RoHS	

## C. APPEARANCE DRAWING

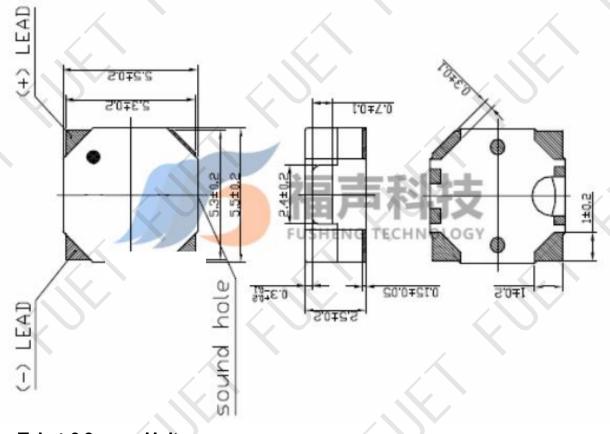

Tol : ± 0.3 Unit: mm

FUET-5525


#### **D.TESTING METHOD**

#### **Standard Measurement conditions**


Temperature:25±2°C Humidity:45-65%

#### **Acoustic Characteristics:**


The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below

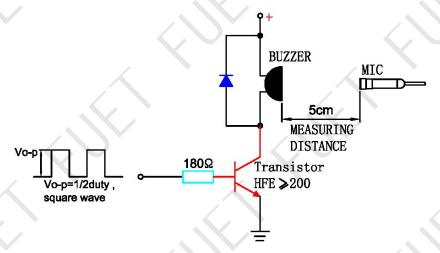


In the measuring test, buzzer is placed as follows:

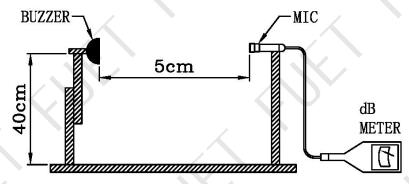

#### E. Typical Frequency Response Curve

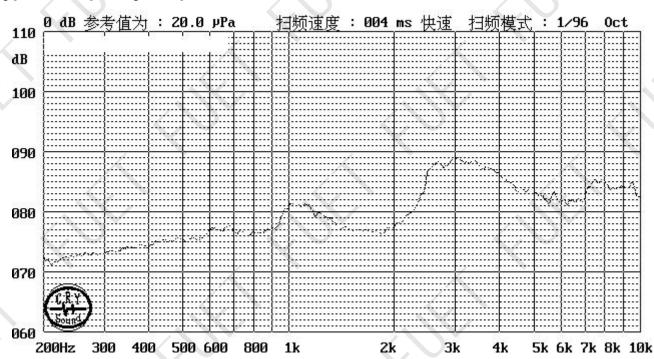

#### **F. Recommend Driving Circuit**




The base current Ib should high enough so that it saturates the collector current of the transistor with the CB load.

#### **G. Soldering Condition**

(1)Recommendable reflow soldering condition is as follows (Reflow soldering is twice)

Note: It is requested that reflow soldering should be executed after heat of product goes down to normal.

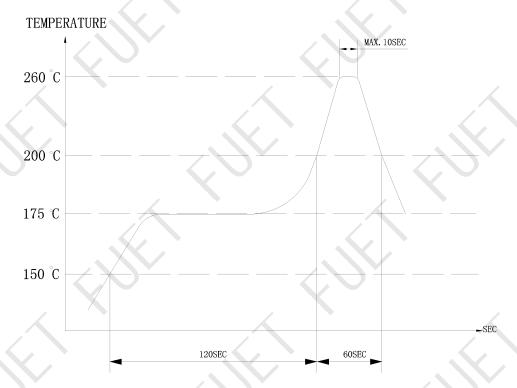

Heat resistant line

(Used when heat resistant reliability test is performed)

(2)Manual soldering

Manual soldering temperature 350° C within 5 sec.

#### H. RELIABILITY TEST

NO.	ITEM	TEST CONDITION AND REQUIREMENT		
1	High Temperature Test (Storage)  After being placed in a chamber with 80 2°C for 96 hours and then being placed in normal condition for 2 hours.  Allowable variation of SPL after test: 10dB.			
2	Low Temperature Test (Storage)	After being Placed in a chamber with -30 2°C for 96 hours and then being placed in normal condition for 2 hours.  Allowable variation of SPL after test: 10dB.		
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40 2°C for 96 hours and then being placed in normal condition for 2 hours.  Allowable variation of SPL after test: 10dB.		
2		The part shall be subjected to 5 cycles. One cycle shall be consist of:  +70°C  +25°C +25°C		
4	Temperature Cycle Test	-20°C    0.5 hr		
5	Drop Test	Drop on a hard wood board of 4cm thick, any directions ,6 times, at the height of 75cm.  Allowable variation of SPL after test: 10dB.		
6	Vibration Test	After being applied vibration of amplitude of 1.5mmwith 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours.  Allowable variation of SPL after test: 10dB.		
7	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of +300 5°C for 3 1 seconds.  90% min. lead terminals shall be wet with solder (Except the edge of terminals).		
8	Terminal Strength Pulling Test	The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds.  No visible damage and cutting off.		

#### TEST CONDITION.

a) Temperature : +5  $\sim$  +35 $^{\circ}$ C b) Humidity : 45-85% c) Pressure: 860-1060mbar Standard Test Condition c) 气压: 860-1060mbar 一般测试条件 a) 温度:+5~+35℃ b) 湿度:45-85% **Judgment Test Condition** b) Humidity: 60-70% c) Pressure: 860-1060mbar a) Temperature: +25 ± 2°C 争议时测试条件 a) 温度:+25±2℃

b) 湿度:60-70% c) 气压: 860-1060mbar

# I. PACKING STANDARD 2000Pcs/盘 8 layers corton VOLUME MICHIGAGIN 16000Pcs/箱 FUET-5525