XKB Connectity

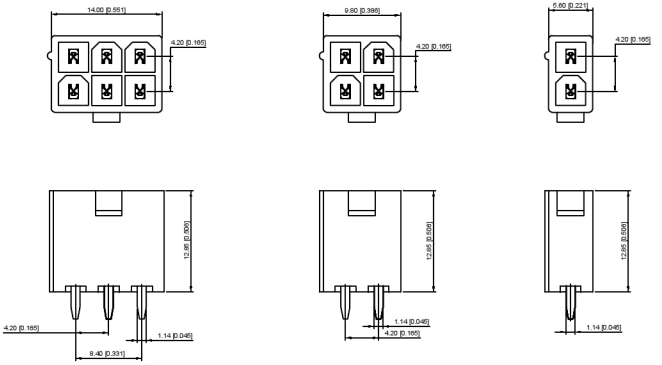

2*03PIN 2*02PIN 2*01PIN



PCB RECOMMENDED LAYOUT

XKB Connectity

Specifications:

规格： XKB

Voltage rating:600V AC/DC

额定电压：600V AC/DC

Current rating:9A AC/DC

额定电流：9A AC/DC

Withstanding voltage:1500V AC/minute

耐受电压：1500V AC/分钟

Temperature range:-25℃-+85℃

温度范围：-25℃-+85℃

Insulation resistance:≥1000MΩ

绝缘电阻：≥1000MΩ

Contact resistance:≤10mΩ

接触电阻：≤10mΩ

After environmental testing:≤20mΩ

环境测试后：≤20兆欧

XKB Connectity

X9357 W V X-2*XX HS -XX SN XX

01 Series No
02 Category:W-wafer
03 Welding Board Angle:V-Straight 180°
04 Welding Way: Blank-DIP
05 Row No.-Pin No.:2*XX
06 Plug the Pin&Specal NO.:
HS-Hollow needle seal
07 Material:NO-PA66 94V-0:N2-PA66 94V-2
08 Planting Category:SN-Bright Tin plating
09 Color:Blank-Natural Color

XKB Connectity

X9357WV-2*XXHS-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	X9357H
X9357WV-2*XXHS-N0SN	Nylon 66 UL 94V-0			
PART N0	Material	Material(Pin)	Finish(Pin)	Suitable XKB Terminal

广东星坤科技股份有限公司
文件工程章

生效		日期				
△X						
△X						
MARK	DESCRIPTION	DATE	REVISED	APPROVED		

REVISIONS

www.xkb.cn www.helloxkb.com www.helloxkb.cn

ANGLAR	±5°		
L≤4	±0.2		
4<L≤16	±0.3		
16<L≤63	±0.4		
L>63	±0.5		
UNSPECIFIED TOLERANCES			

DSND		DATE		SCALE: N/A	MODEL TYPE: X9357WVX-2*XXHS -XXSNXX
DWN		DATE		VIEW:	PART NO.: 4.20mm Crimp Style Connector
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
1.0g	1/1	A0