



## Description


The HL101x is a photielectric couler composed of light-emitting diode and phototransistor.It is packaged in a 4-pin LSOP 4package.

## Features

- Current transfer radio(CTR:MIN.50% at  $I_F=5mA, V_{CE}=5V$ )
- High input-output isolation voltage ( $V_{iso}=5,000V_{rms}$ )
- Operating Temperature:-55°C~100°C
- RoHS
- MSL1


## Applications

- Programmable controllers
- Switching power supply,intelligent meter
- Home appliances: such as air conditioners, fans,water heaters,etc

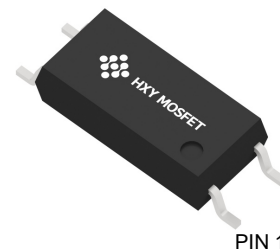

LSOP-4

Schematic

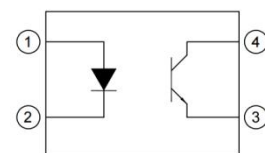

Pin Configuration  
1 Anode  
2 Cathode  
3 Emitter  
4 Collector

## Rank Table Of Current Transfer Ratio (CTR= $I_C/I_F \times 100\%$ )

Rank Code	Symbol	Min	Max	Conditon
HL1010	CTR	50	600	$I_F=5mA,$ $V_{CE}=5V,$ $T_a=25^\circ C$
HL1017		80	160	
HL1018		130	260	
HL1019		200	400	
HL1012	CTR	63	125	$I_F=10mA,$ $V_{CE}=5V,$ $T_a=25^\circ C$
HL1013		100	200	
HL1014		160	320	
HL1012	CTR	22		$I_F=1mA,$ $V_{CE}=5V,$ $T_a=25^\circ C$
HL1013		34		
HL1014		56		



### Absolute Ratings(Tamb = 25°C)

	Parameter	Symbol	Values	Unit
Input	Forward Current	I <sub>F</sub>	50	mA
	Reverse Voltage	V <sub>R</sub>	6	V
	Power Dissipation	P	70	mW
	Peak Forward Current (100μs pulse, 100Hz)	I <sub>FP</sub>	1	A
	Thermal Resistance Junction-Ambient	R <sub>thJ-A</sub>	325	°C/W
	Thermal Resistance Junction-Case	R <sub>thJ-C</sub>	200	°C/W
Output	Collector - Emitter Voltage	V <sub>CEO</sub>	80	V
	Emitter - Collector Voltage	V <sub>ECO</sub>	6	V
	Collector Current	I <sub>C</sub>	50	mA
	Collector Power Dissipation	P <sub>C</sub>	150	mW
Operating temperature range		T <sub>op</sub>	-55 ~ 110	°C
Storage temperature range		T <sub>stg</sub>	-55 ~ 125	°C
Total Power consumption		P(W)	200	mW
Isolation Voltage <sup>(1)</sup>		V <sub>ISO</sub>	5000	V <sub>rms</sub>
Soldering Temperature <sup>(2)</sup>		T <sub>SOL</sub>	260	°C

Notes:

(1). AC for 1 minute, R.H.= 40 ~ 60% R.H. In this test, pins 1, 2 are shorted together, and pins 3, 4 are shorted together.

(2).For 10 seconds

### Electrical Characteristics (Ratings at 25°C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditon
Input	Forward Voltage	V <sub>F</sub>	-	1.2	1.4	V	I <sub>F</sub> =20mA
	Reverse Current	I <sub>R</sub>	-	-	10	μA	V <sub>R</sub> =4V
	Terminal Capacitance	C <sub>t</sub>	-	30	250	pF	V=0, f=1KHz
Output	Collector Dark Current	I <sub>CEO</sub>	-	-	100	nA	V <sub>CE</sub> =20V, I <sub>F</sub> =0
	Collector-Emitter Breakdown Voltage	BV <sub>CEO</sub>	80			V	I <sub>C</sub> =0.1mA, I <sub>F</sub> =0
	Emitter-Collector Breakdown Voltage	BV <sub>ECO</sub>	7			V	I <sub>E</sub> =10μA, I <sub>F</sub> =0
Collector-Emitter Saturation Voltage		V <sub>CE(sat)</sub>			0.3	V	I <sub>F</sub> =10mA, I <sub>C</sub> =1mA
Isolation Resistance		R <sub>iso</sub>	5 × 10 <sup>10</sup>	1 × 10 <sup>11</sup>	-	Ω	DC500V, 40 ~ 60% R.H.
Floating Capacitance		C <sub>f</sub>		0.6	1	pF	V=0, f=1MHz
Response Time (Rise)		tr			18	μs	V <sub>CE</sub> =5V, I <sub>C</sub> =5mA RL=100Ω,
Response Time (Fall)		tf			18	μs	



## Characteristics Curves

Fig.1 Relative Current Transfer Ratio vs. Forward Current Fig.2 Forward Current vs. Forward Voltage

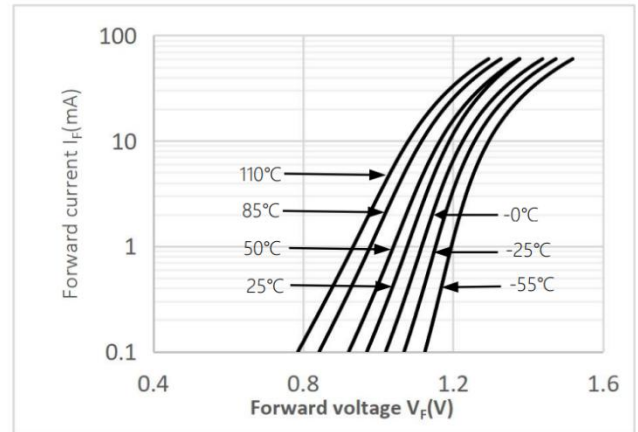
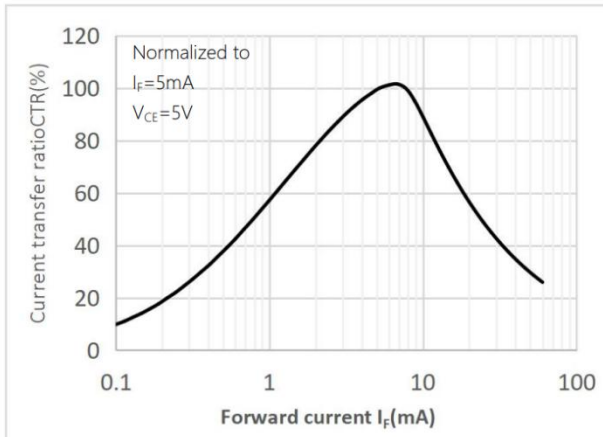


Fig.3 Collector Current vs. Collector-emitter Voltage

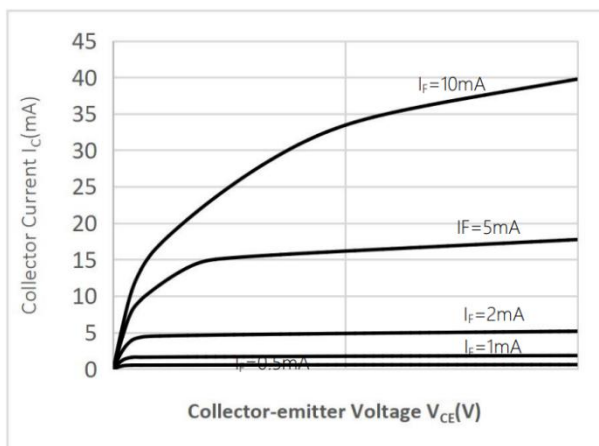


Fig.4 Relative Current Transfer Ratio vs. Ambient Temperature

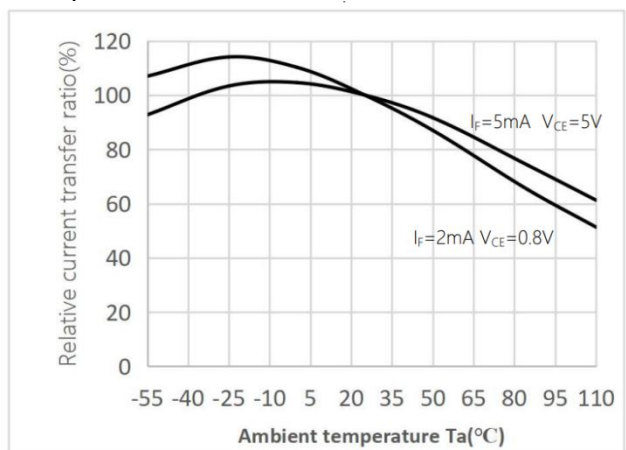


Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

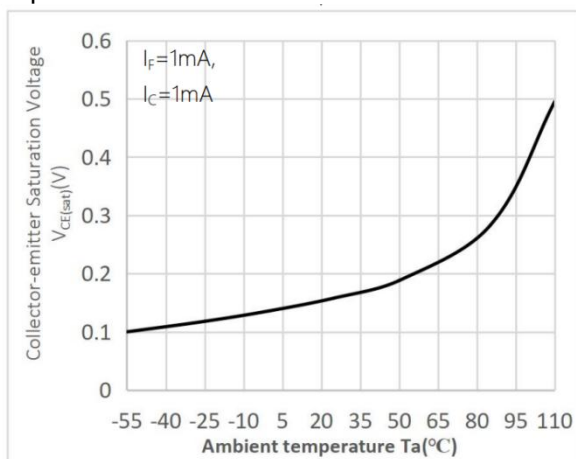


Fig.6 Collector Dark Current vs Ambient Temperature

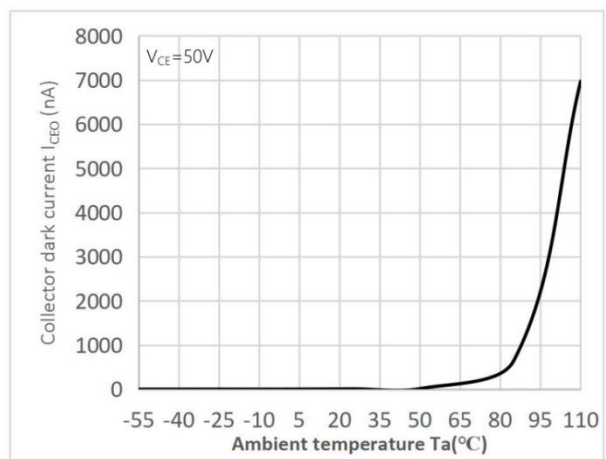




Fig.7 Response Time vs. Load Resistance

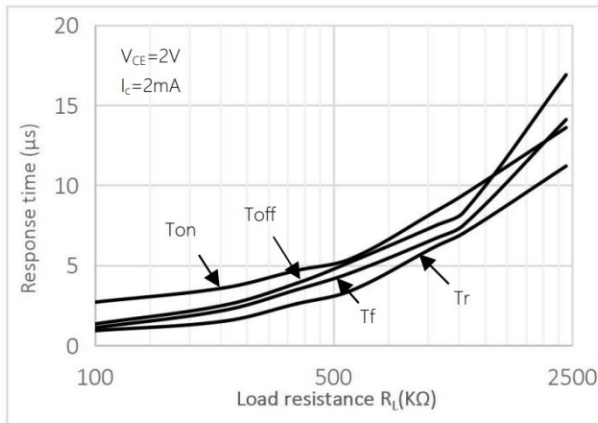


Fig.8 Frequency Response

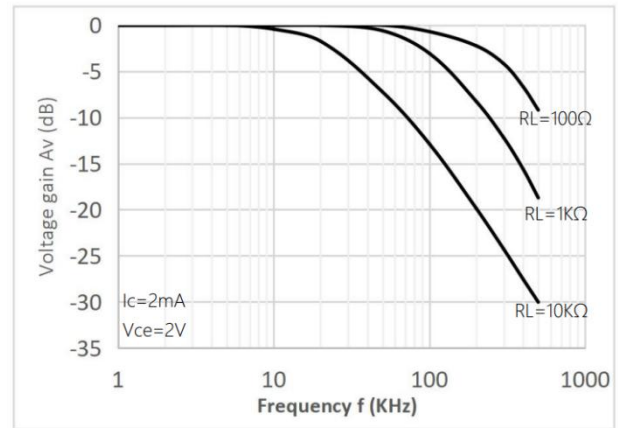


Fig.9 Collector-emitter Saturation Voltage vs Forward Current



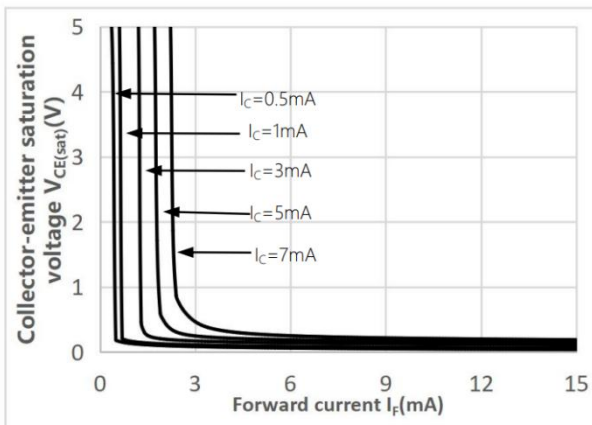


Fig.10 Switching Time Test Circuit & Waveforms



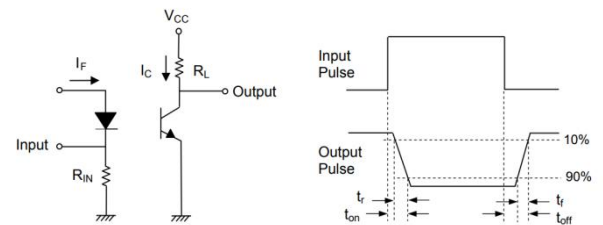


## Outline Dimension

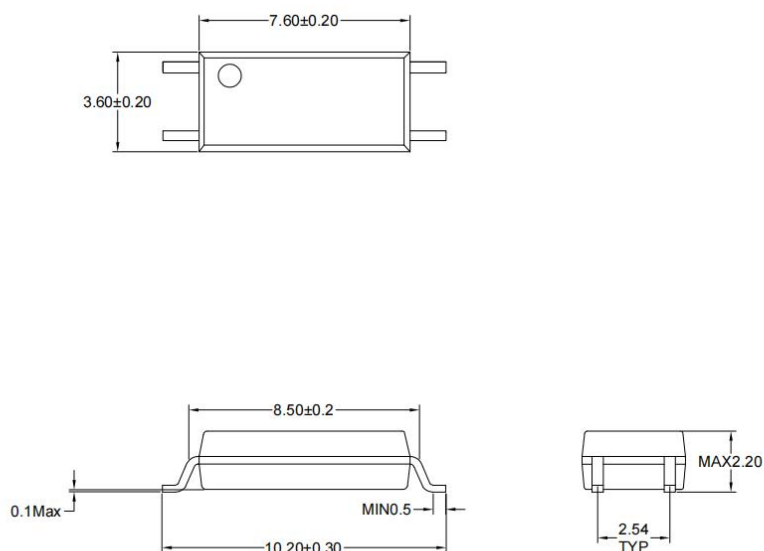

Unit: mm

Tolerance:  $\pm 0.1\text{mm}$

## Recommended solder pad Design

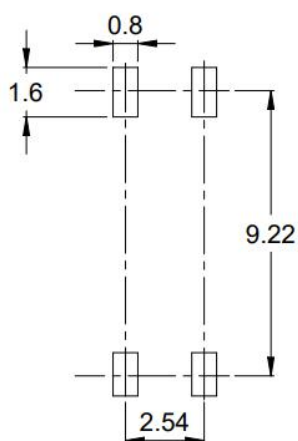

Unit: mm

Tolerance:  $\pm 0.1\text{mm}$




## Temperature Profile Of Soldering

### 1.IR Reflow soldering

**(JEDEC-STD-020 compliant)**

Profile item	Conditon
Preheat	
-Temperature Min (TSmin)	150°C
-Temperature Max (TSmax)	200°C
-Time (min to max) (ts)	90±30 sec
Soldering zone	
-Temperature (TL)	217°C
-Time (tL)	60sec
Peak Temperature (TP)	260°C
Ramp-up rate	3°C / sec max
Ramp-down rate	3~6°C/ sec

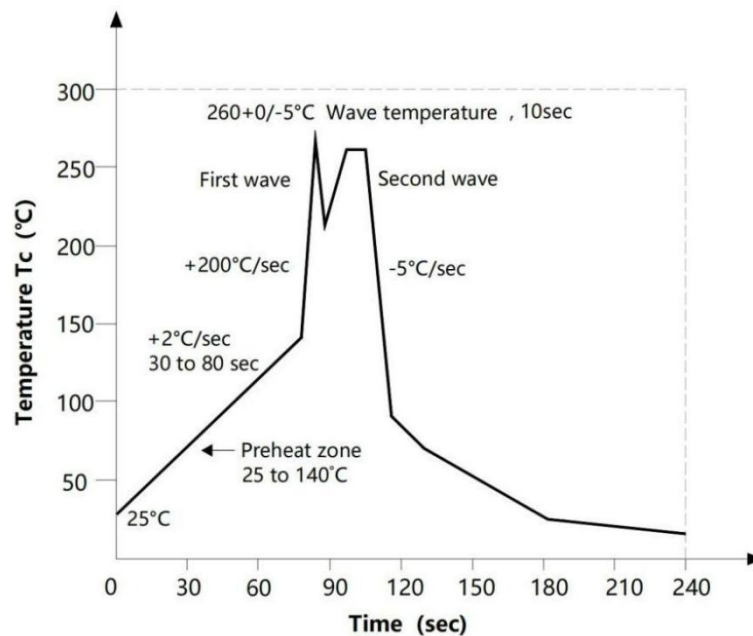


#### Notes:

One time soldering reflow is recommended within the condition of temperature and time profile shown below. Do not solder more than three times.



## 2. Wave soldering (JEDEC22A111 compliant)

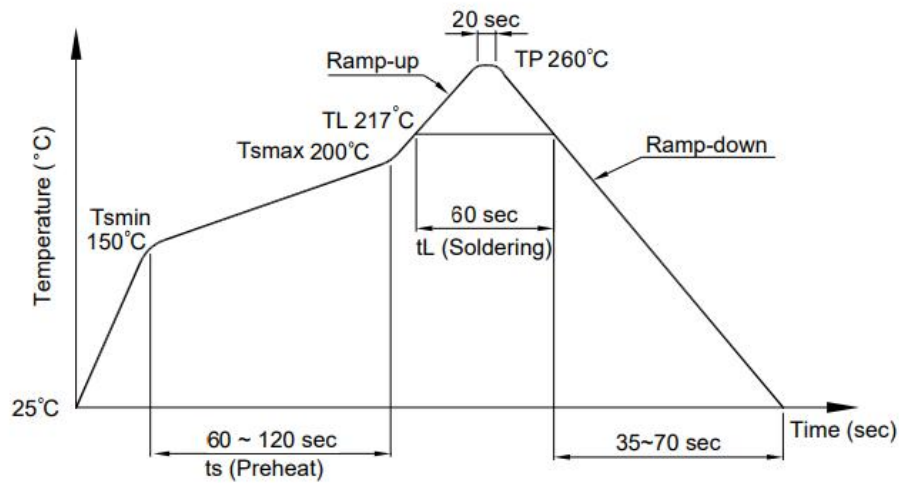

## 3. Hand soldering by soldering iron

Allow single lead soldering in every single process. One time soldering is recommended.

Temperature: 380 +0/-5°C

Time: 3 sec max.



### **Attention**

- Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.
- HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.
- Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.
- Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production. HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.