



Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

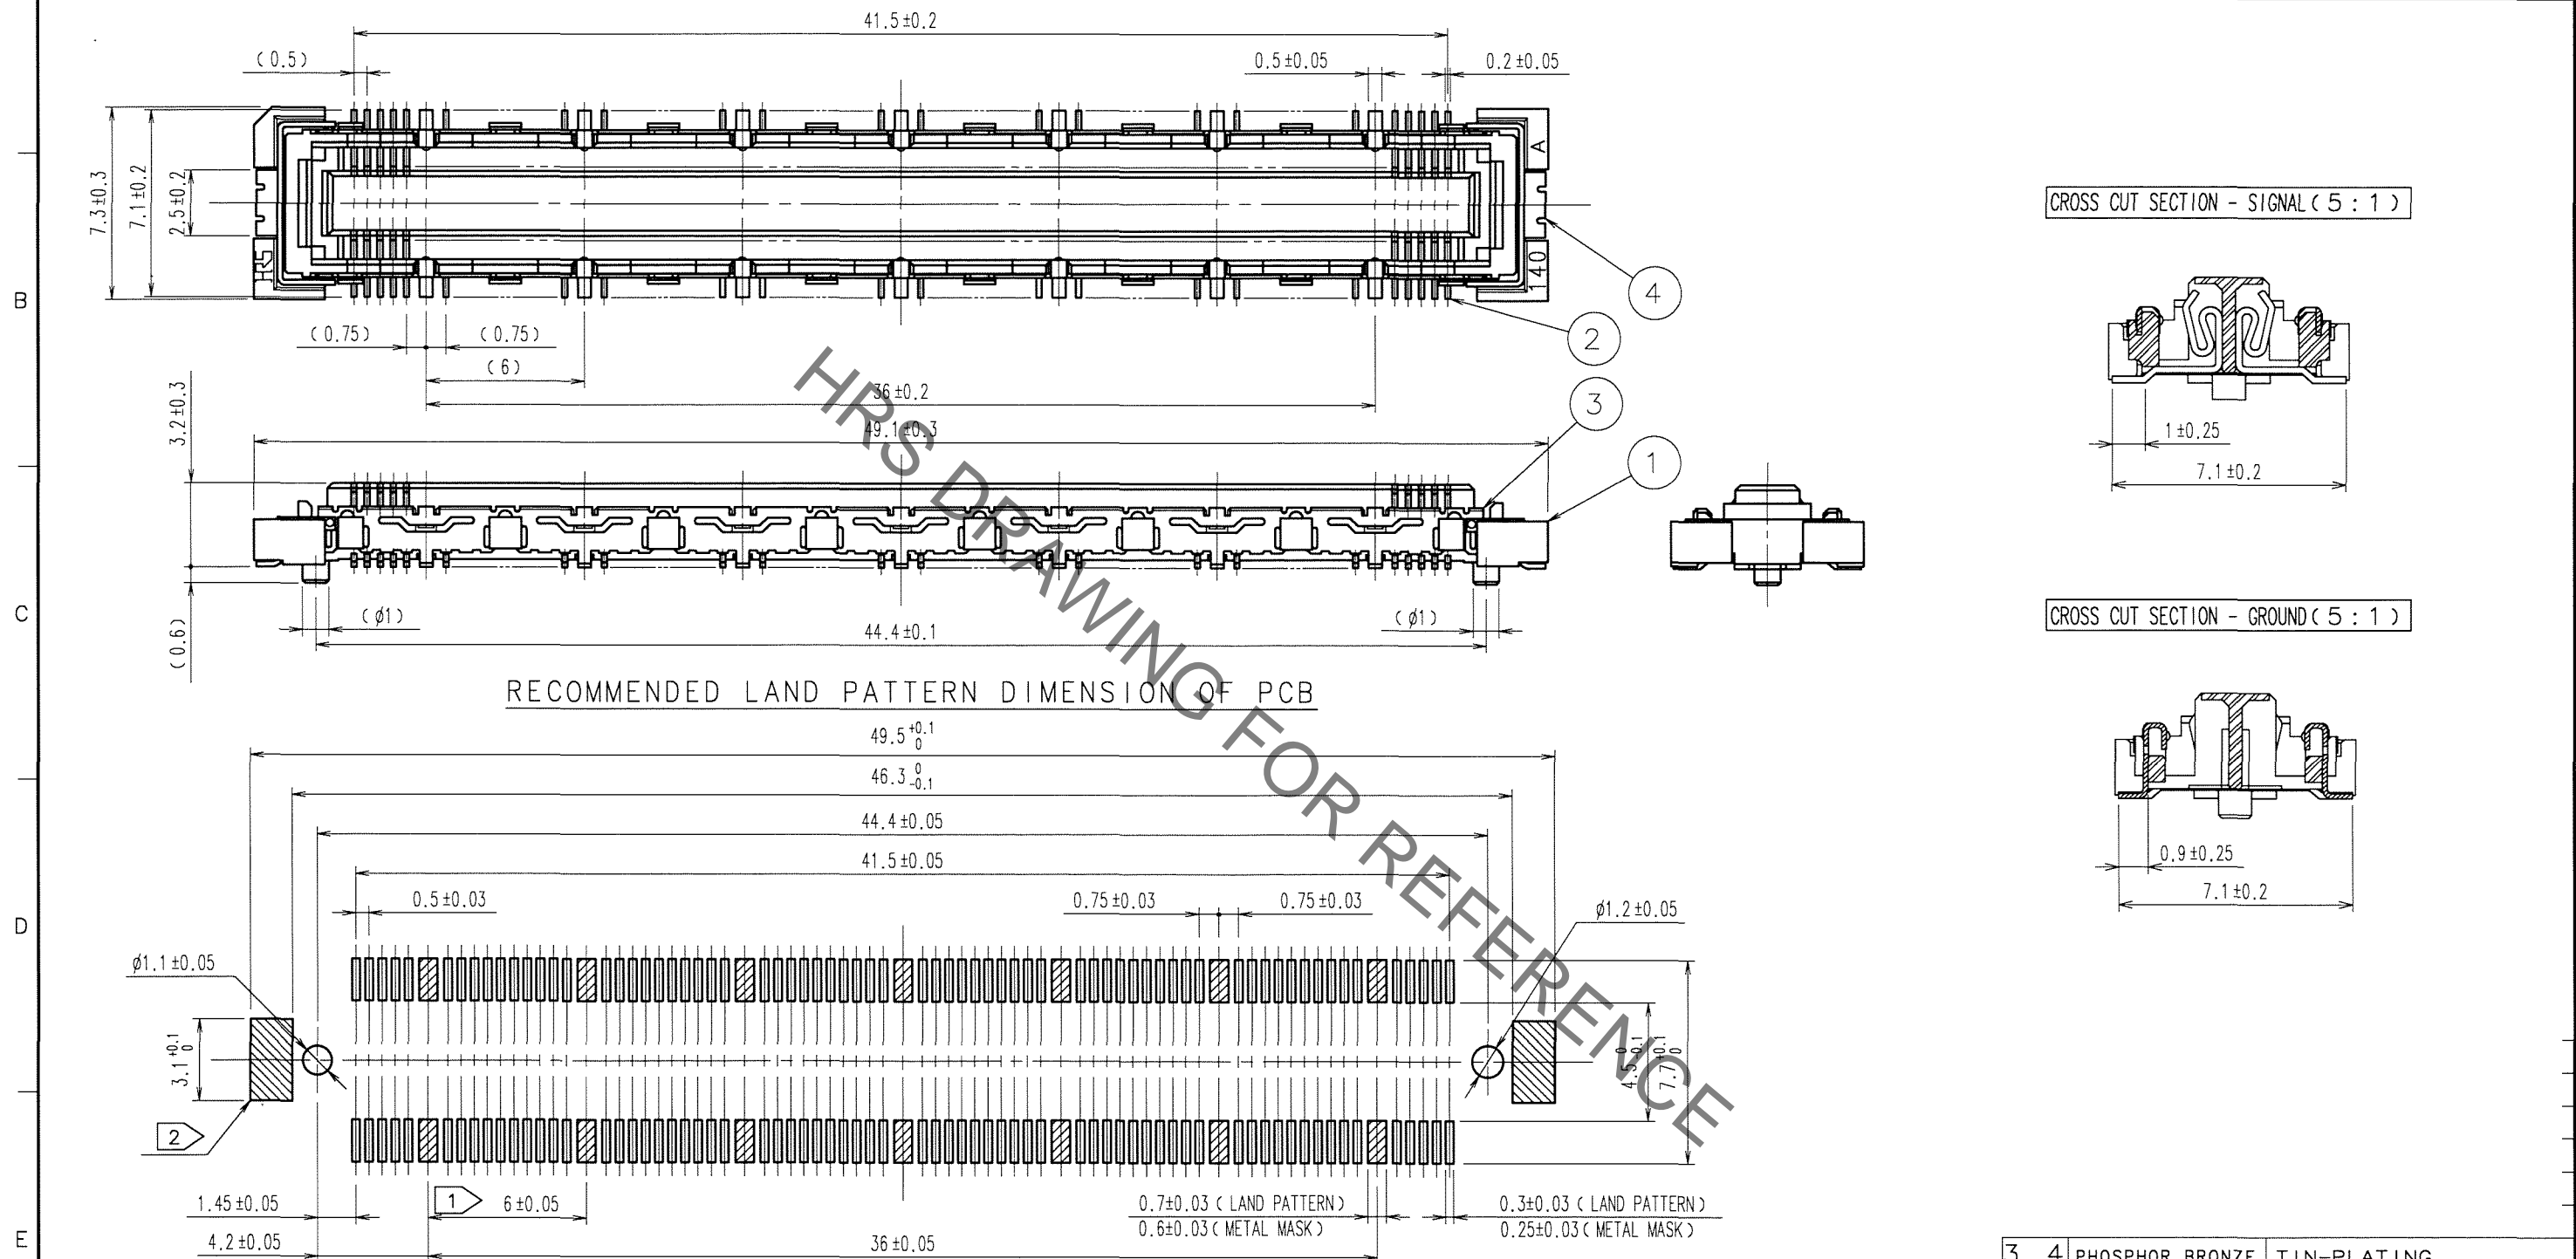

RECOMMENDED LAND PATTERN DIMENSION OF PCB

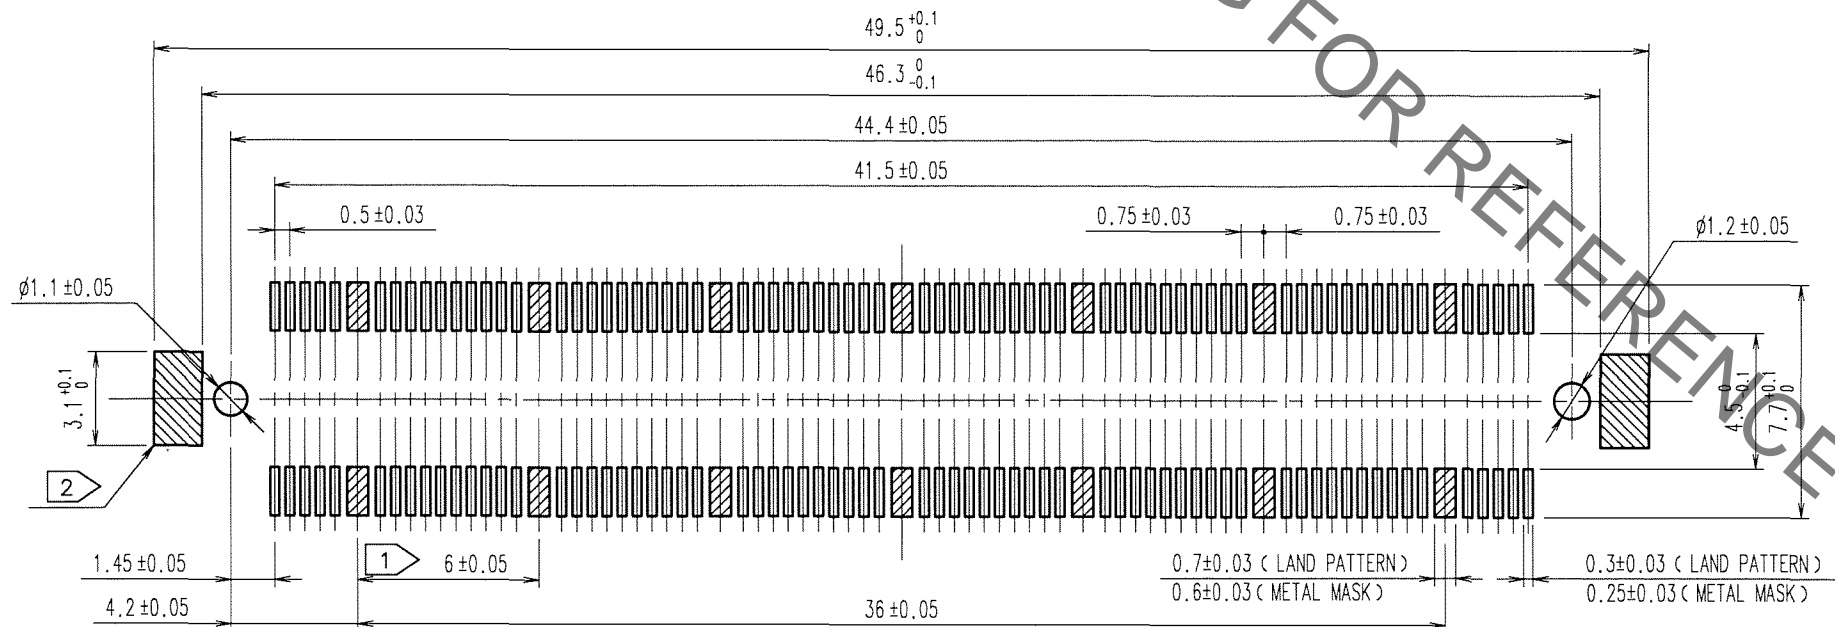

- NOTES
- ① 14 HATCHED PARTS:GROUND CIRCUIT.
 - ② 2 HATCHED PARTS:GROUND CIRCUIT.
 - 3 SMT LEAD-COPLANARITY:0.1 MAX.
 - 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 5 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

TO
PCK

1	LCP	BEIGE	UL94V-0	3, 4	PHOSPHOR BRONZE	TIN-PLATING		
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS		
2	PHOSPHOR BRONZE					CONTACT AREA : GOLD 0.1μm min.		
						LEAD AREA : GOLD FLASH		
						UNDER PLATING : NICKEL 1μm min.		
CODE NO. (OLD) CL				DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
				A.SUZUKAWA	<i>A. Nakamura</i>	<i>K. Ogawa</i>	<i>H. Okawa</i>	
				06.12.04	06.12.04	06.12.04	06.12.04	
DRAWING NO. EDC3-151979-25				PART NO. FX10A-140S/14-SV(71)				
SCALE 4 : 1				CODE NO. CL570-0204-2-71				
UNITS mm				HIROSE ELECTRIC CO., LTD				