


Dual General-Purpose Operational Amplifier

Features

- Internal Frequency Compensation
- Continuous Short-Circuit Protection
- Wide Common-Mode Voltage Ranges
- Wide Differential Voltage Ranges
- High DC voltage gain (about 100 dB)
- Unit gain bandwidth (about 3.5 MHz)
- Low Input Bias
- Low Input Offset Voltage and Current

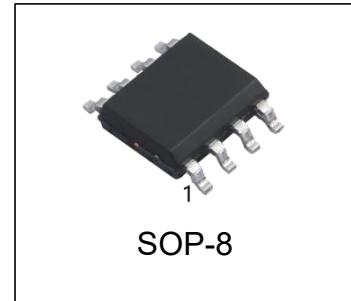

Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
JRC4558LM/TR	SOP-8	4558L	REEL	4000pcs/reel

Description


The JRC4558L device is a dual general-purpose operational amplifier.

The high common-mode input voltage range and the absence of latch-up make this amplifier ideal for voltage-follower applications. The device is short-circuit protected, and the internal frequency compensation ensures stability without external components.


Applications

- Active filter
- Compensation amplifier
- Audio preamplifier
- Electronic instrumentation

Schematic(Eachamplifier)

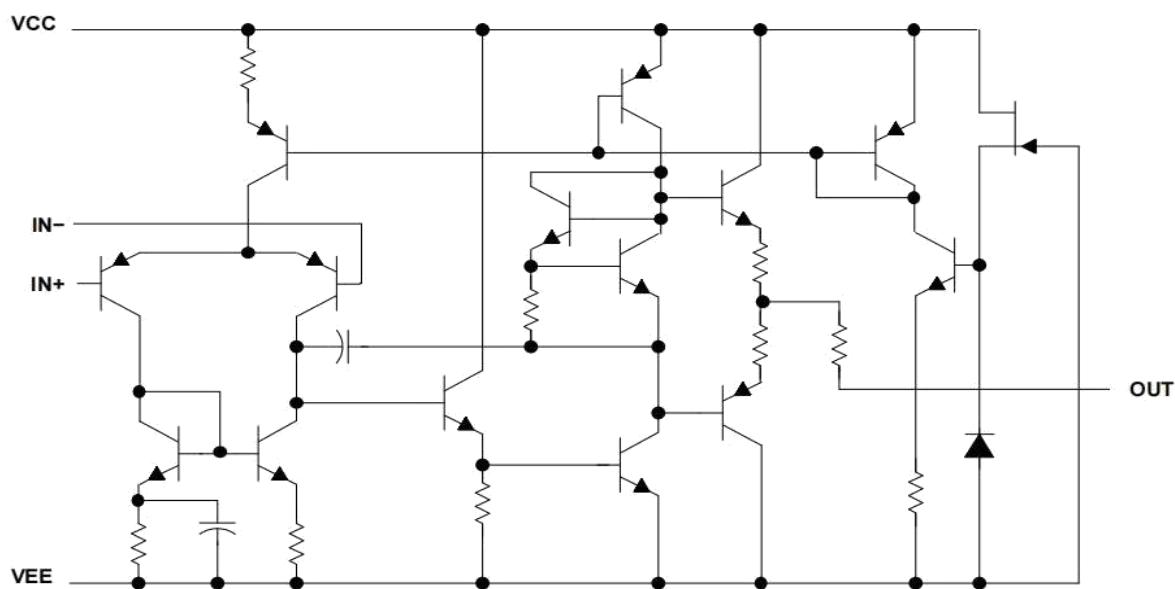

Pin Configuration

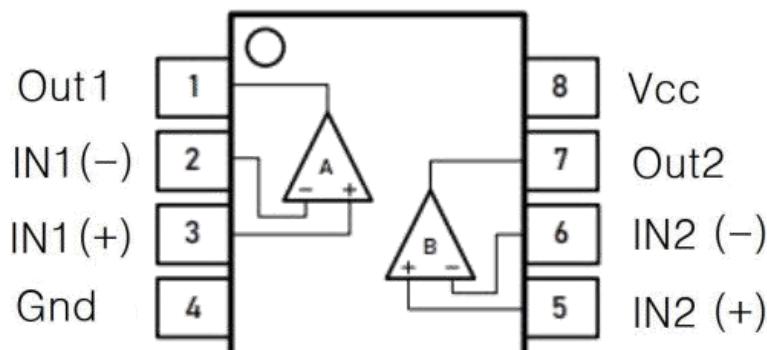

SOP-8

Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted) ⁽¹⁾

PARAMETER	MIN	MAX	UNIT
Total Supply Voltage		±22	V
Differential Input Voltage		±20	V
Maximum Junction Temperature	-40	+150	°C
Operating Temperature Range	-20	+85	°C
Storage Temperature Range	-65	+150	°C
Lead Temperature (Soldering, 10 seconds)	-	+260	°C

Note: Stress greater than those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions outside those indicated in the operational sections of this specification are not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended Operating Conditions





PARAMETER	MIN	NOM	MAX	UNIT
Supply Voltage, Vs=(V+)-(V-)	Signal-supply	5	36	V
	Dual-supply	±2.5	±18	V
Operating Temperature Range	-20		+85	°C





Electrical Characteristics





(VCC = +15 V, VEE = -15 V, TA = 25°C, unless otherwise noted)

PARAMETER	SYMBOL	CONDITIONS	JRC4558L			
			MIN	TYP	MAX	UNIT
Power supply current	I _{CC}	R _L =∞	-	3	5.5	mA
Input offset voltage	V _{IO}	R _S <10kΩ	-	±2	±5	mV
Input offset current	I _{IO}	V _{CM} =0V	-	±30	±200	nA
Input bias current	I _{BIAS}	V _{CM} =0V	-	±50	±250	nA
Input Common Mode Voltage	V _{ICM}		-	12	13	V
Output Voltage Swing	V _{OM}	R _L =10k	12	14	-	V
		R _L =2k	10	13	-	V
Output short-circuit current	I _{SC}	V _O = 0V	±40	±60	±80	mA
Large Signal Voltage Gain	G _V	V _O (p-p) =±10V, R _L <2kΩ	80	100	-	dB
Common Mode Rejection Ratio	CMRR	R _S <10kΩ	70	90	-	dB
Power supply Rejection Ratio	PSRR	R _S <10kΩ	65	90	-	dB
Gain-Bandwidth Product	GBWP		-	3.5	-	MHz
Slew Rate	SR		-	1.7	-	V/us

Typical Characteristics

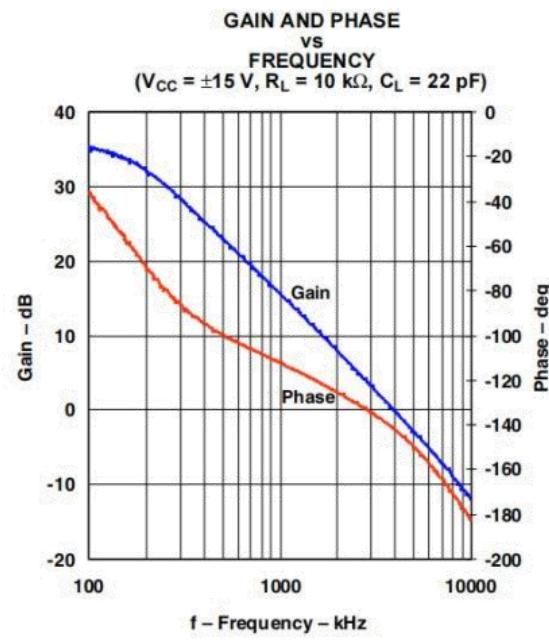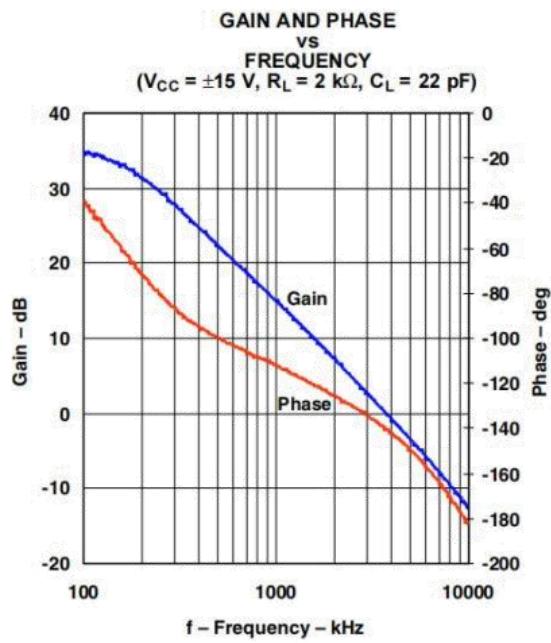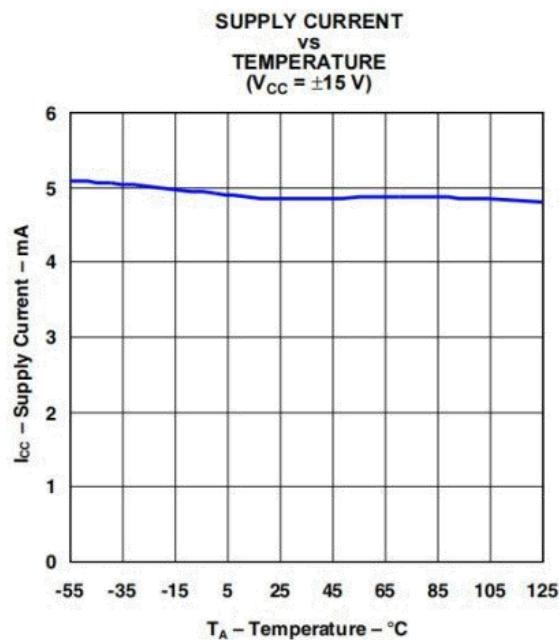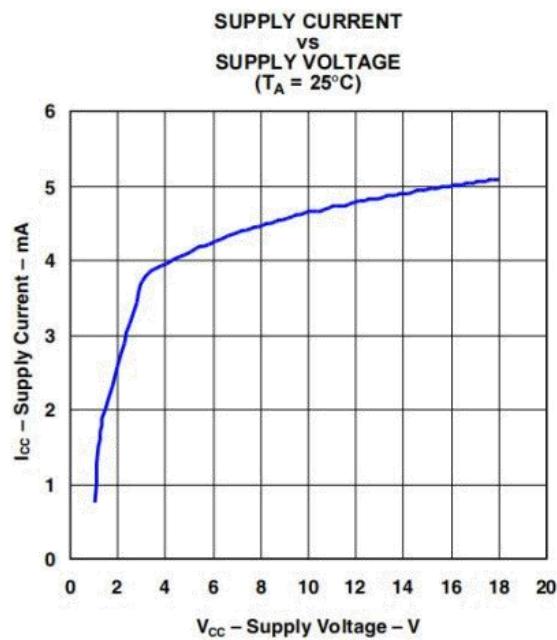


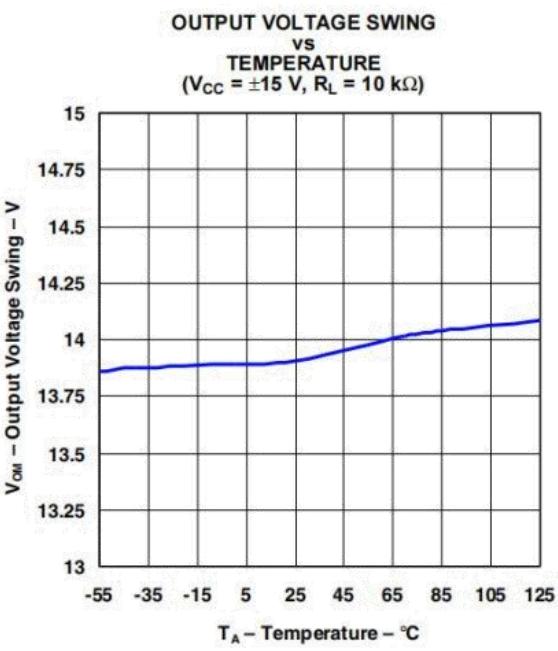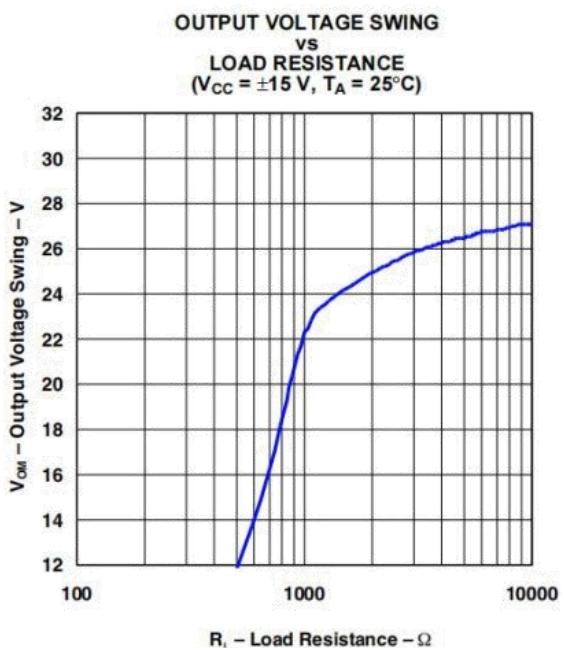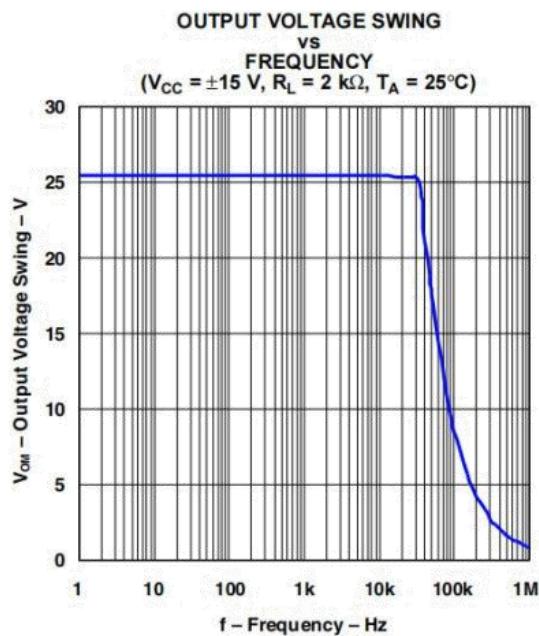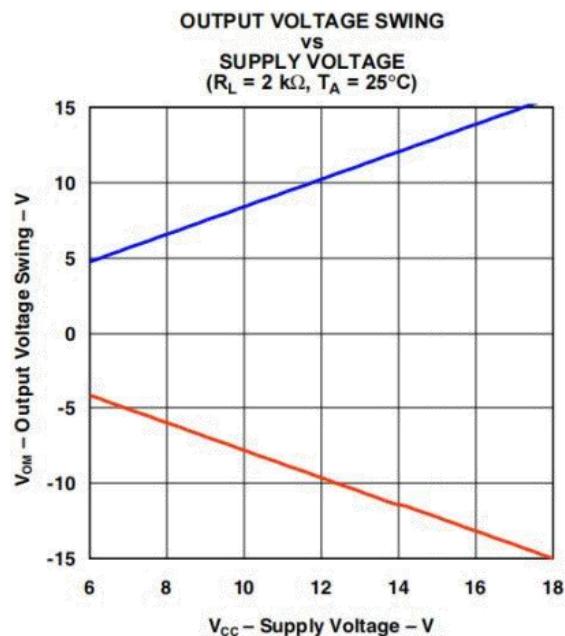

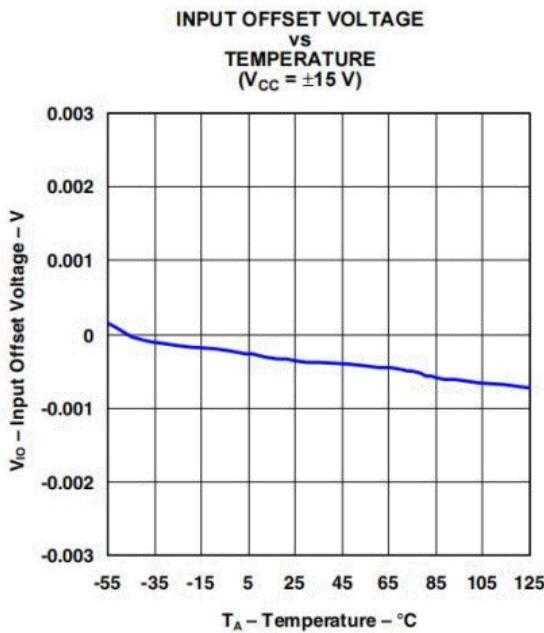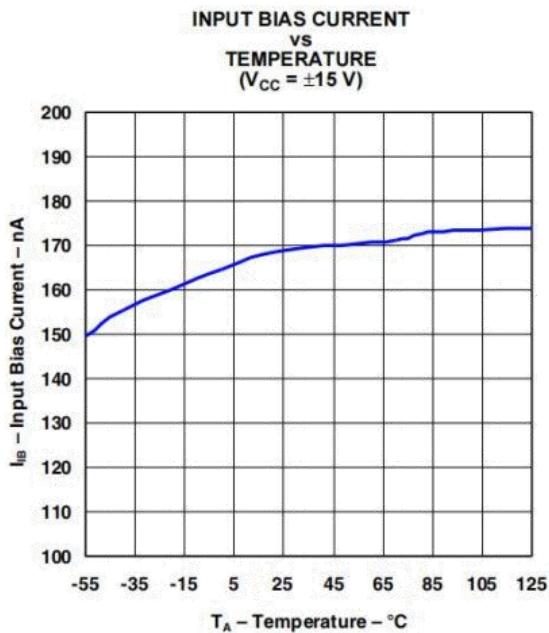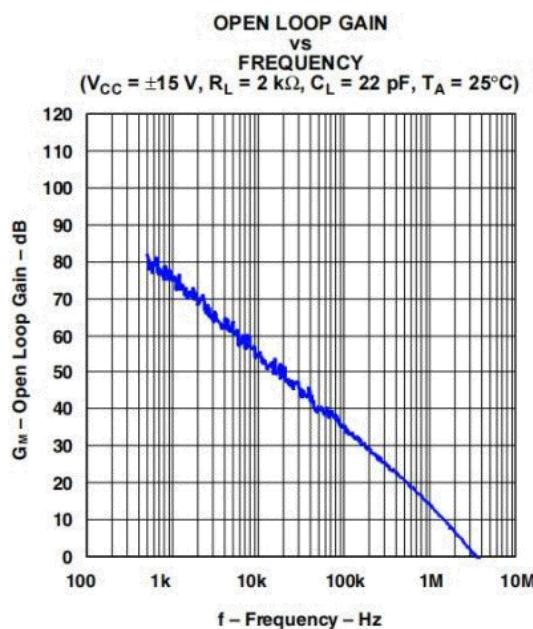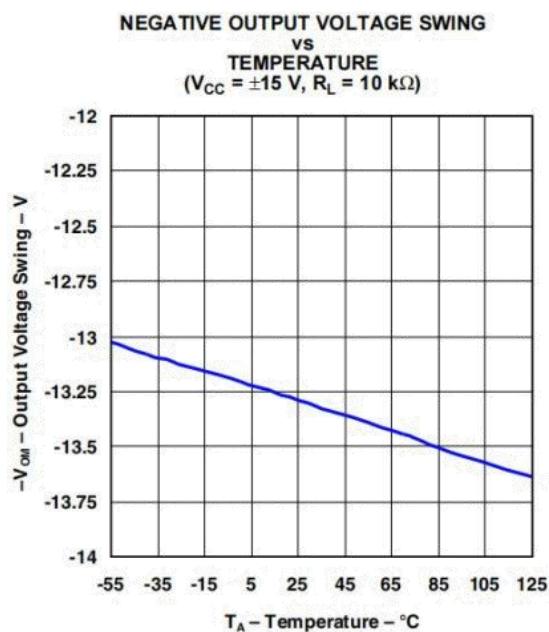

Physical Dimensions

SOP-8

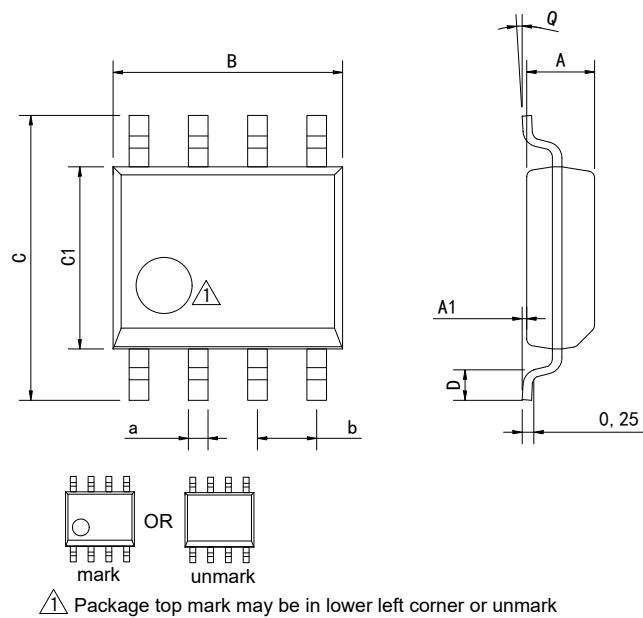

Dimensions In Millimeters(SOP-8)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	4.90	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	5.10	6.20	4.00	0.80	8°	0.45	

C

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2019-4	New	1-10
V1.1	2025-8	Document Reformatting	1-10

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Huaguan Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Huaguan Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: Select the appropriate Huaguan Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Huaguan Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Huaguan Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Huaguan Semiconductor, and the user shall not claim any compensation liability against Huaguan Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Huaguan Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Huaguan Semiconductor. Not all parameters of each device need to be tested.

The documentation of Huaguan Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Huaguan Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Huaguan Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Huaguan Semiconductor accepts no liability for any loss or damage caused by infringement.