

Descriptions

Silicon NPN transistor in a SOT-23 Plastic Package.

Features



Low $V_{CE(sat)}$, high current.

Applications

General purpose switching and muting


LCD back-lighting

Supply line switching circuits.



h_{FE} Classifications & Marking

h_{FE} Range	>200
Marking	HU5

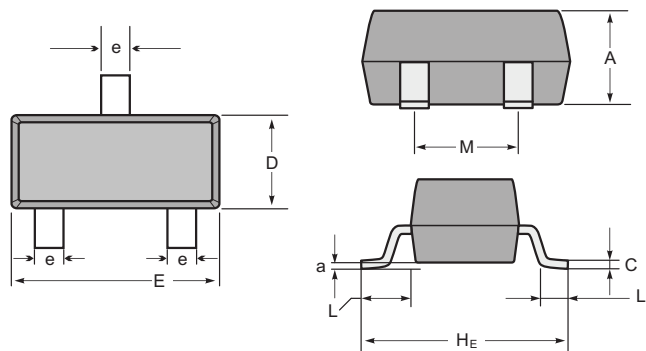

SOT-23 mechanical data

UNIT		A	C	D	E	H _E	e	M	L	L ₁	a
mm	max	1.1	0.15	1.4	3.0	2.6	0.5	1.95	0.55 (ref)	0.36 (ref)	0.0
	min	0.9	0.08	1.2	2.8	2.2	0.3	1.7			0.15
mil	max	43	6	55	118	102	20	77	22 (ref)	14 (ref)	0.0
	min	35	3	47	110	87	12	67			6

Absolute Maximum Ratings(Ta=25°C)


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	80	V
Collector to Emitter Voltage	V_{CEO}	60	V
Emitter to Base Voltage	V_{EBO}	5	V
Collector Current	I_C	1	A
Peak Collector Current	I_{CM}	2	A
Base Current	I_B	0.3	A
Peak Base Current	I_{BM}	1	A
Collector Power Dissipation	P_C	400	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C

PBSS4160T

Electrical Characteristics(Ta=25°C)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=60V$ $I_E=0A$			100	nA
		$V_{CB}=60V$ $I_E=0A$ $T_J=150^{\circ}C$			50	μA
Collector Cut-Off Current	I_{CES}	$V_{CE}=60V$ $V_{BE}=0V$			100	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=5.0V$ $I_C=0A$			100	nA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=5.0V$ $I_C=500mA$	200	350		
	$h_{FE(2)}$	$V_{CE}=5.0V$ $I_C=1.0mA$	250	400		
	$h_{FE(3)}$	$V_{CE}=5.0V$ $I_C=1.0A$	100	150		
Collector-Emitter Saturation Voltage	$V_{CE(sat)(1)}$	$I_C=100mA$ $I_B=1.0mA$		90	110	mV
	$V_{CE(sat)(2)}$	$I_C=500mA$ $I_B=50mA$		110	140	mV
	$V_{CE(sat)(3)}$	$I_C=1.0A$ $I_B=100mA$		200	250	mV
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=1.0A$ $I_B=50mA$		0.95	1.1	V
Base-Emitter Voltage	V_{BE}	$V_{CE}=5.0V$ $I_C=1.0A$		0.82	0.9	V
Transition Frequency	f_T	$V_{CE}=10V$ $I_C=50mA$ $f=100MHz$	150	220		MHz
Output Capacitance	C_C	$V_{CB}=10V$ $I_E=0$ $f=1.0MHz$		5.5	10	pF

RATING AND CHARACTERISTIC CURVES (PBSS4160T)

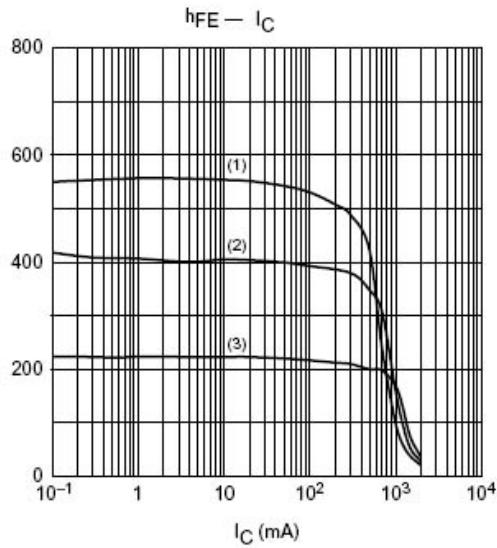


$V_{CE} = 5 \text{ V.}$

- (1) $T_{amb} = 100 \text{ }^{\circ}\text{C.}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C.}$
- (3) $T_{amb} = -55 \text{ }^{\circ}\text{C.}$

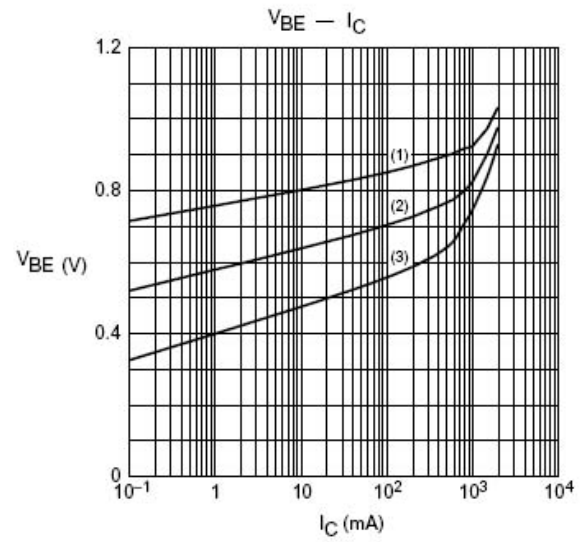


$V_{CE} = 5 \text{ V.}$

- (1) $T_{amb} = -55 \text{ }^{\circ}\text{C.}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C.}$
- (3) $T_{amb} = 100 \text{ }^{\circ}\text{C.}$

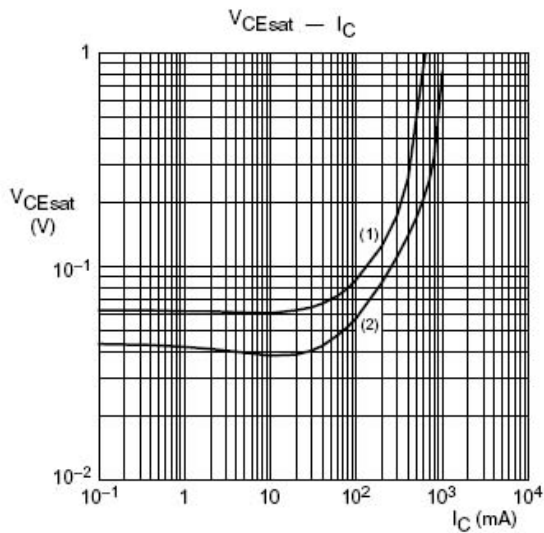

$T_{amb} = 25 \text{ }^{\circ}\text{C.}$

- (1) $I_C/I_B = 100.$
- (2) $I_C/I_B = 50.$

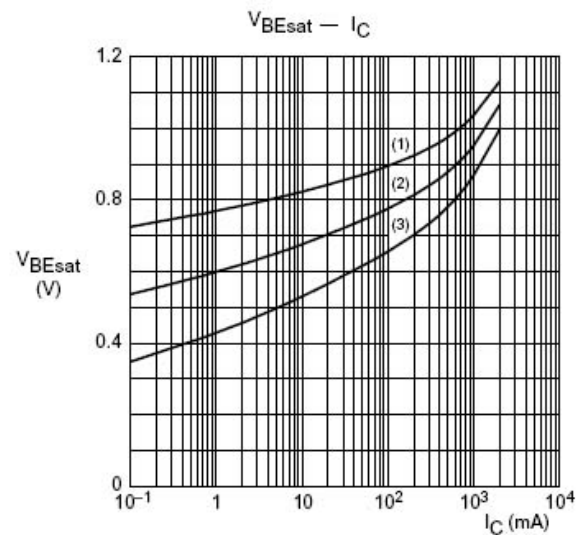

$I_C/I_B = 20.$

- (1) $T_{amb} = -55 \text{ }^{\circ}\text{C.}$
- (2) $T_{amb} = 25 \text{ }^{\circ}\text{C.}$
- (3) $T_{amb} = 100 \text{ }^{\circ}\text{C.}$