


## Features

- High capacitance ratio:  $C_{0V} / C_{5V} = 3.4$  (typ.)
- Designed for high-volume, low-cost battery applications
- Available lead (Pb)-free and RoHS-compliant MSL-1 @ 260°C per JEDEC J-STD-020
- Available in tape and reel packaging
- Industry Standard DFN1x1-4L Package



Package: DFN 1x1-4L  
Mark: D4



Functional Block Diagram

## Product Description

The YVC032P034R device is GaAs hyperabrupt junction varactor diodes specifically designed for VCOs applications. The specified high capacitance ratio and low  $R_s$  of YVC032P034R make it attractive for low phase noise VCOs in wireless systems up to and beyond 3.5GHz. Applications include low-noise and wideband UHF and VHF VCO for GSM, PCS, CDMA and analog phones.

## Absolute Maximum Ratings

Characteristic	Rating	Unit
Forward current ( $I_F$ )	20	mA
Power dissipation ( $P_D$ )	250	mW
Storage temperature ( $T_{ST}$ )	-55 to +150	°C
Operating temperature ( $T_{OP}$ )	-55 to +125	°C
ESD human body model	Class1A	

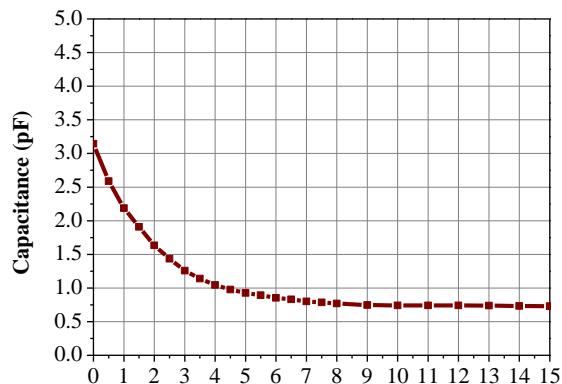
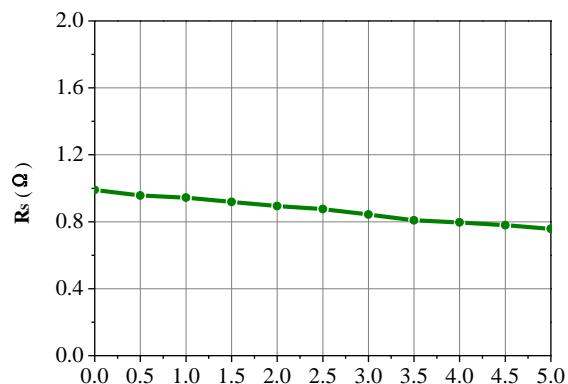
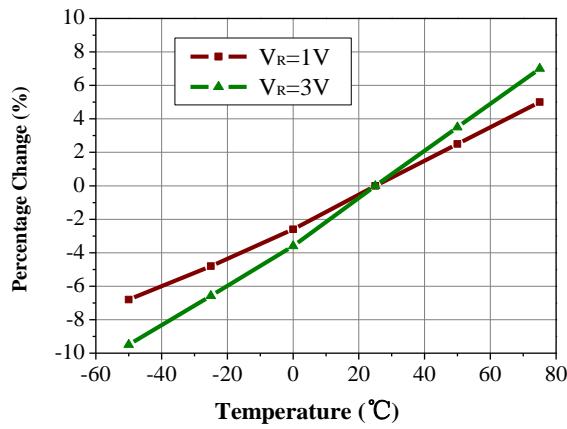
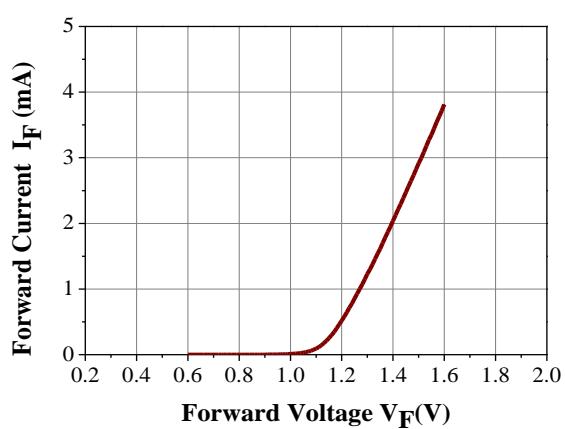


### Caution!

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability.

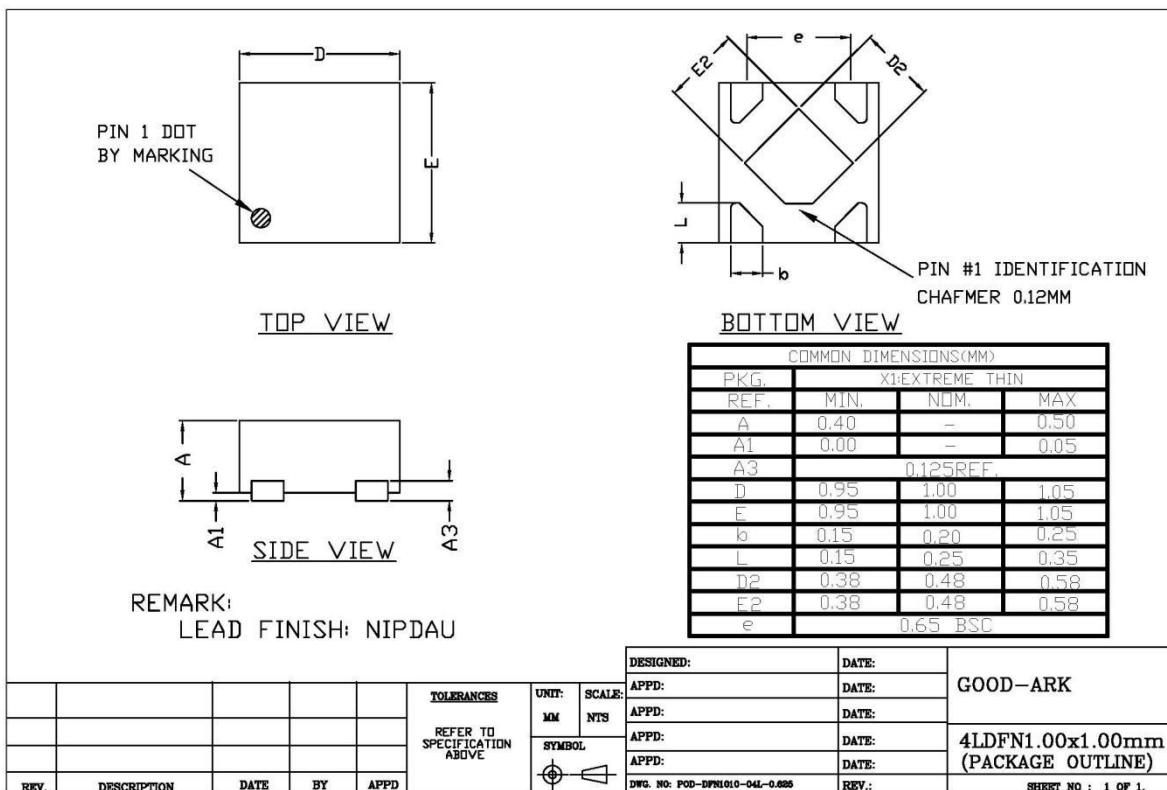
## Electrical Specifications @25 °C

Parameter	Condition	Specification			Unit
		Min.	Typ.	Max.	
Reverse Current ( $I_R$ )	$V_R = 15$ V			20	nA
Capacitance ( $C_T$ )	$C_T$ @ 0.5 V, $V_R = 0.5$ V, $F = 1$ MHz		2.59		pF
Capacitance ( $C_T$ )	$C_T$ @ 5 V, $V_R = 5$ V, $F = 1$ MHz		0.93		pF
Capacitance Ratio ( $C_{TR}$ )	$C_T$ (0.5 V) / $C_T$ (5 V)		2.78		
Series Resistance ( $R_s$ )	$V_R = 1$ V, $F = 100$ MHz			0.94	Ω
Breakdown Voltage ( $V_{BR}$ )	$I_R = 10$ μA	20			V

**Typical Performance Data****Capacitance vs. Reverse Voltage****Series Resistance vs. Reverse Voltage  
@ 100 MHz****Relative Capacitance Change  
vs. Temperature****Forward I-V characteristic curve**

## Package Diagram

(Units: millimeters)



## Part Number Naming Conventions:

(e.g.) **Y VC 032 P 034 R (D)**

(1) (2) (3) (4) (5) (6) (7)

- ① Company: INNOTION
- ② Product ID: (VC=Variable Capacitance Diode)
- ③ Capacitance ( $C_T$ )@ $V_R=0V$  is expressed by three-digit alphanumeric (e.g. **032**=3.2pF, **228**=22.8pF)
- ④ Capacitance Unit: pF
- ⑤ Capacitance ratio:  $C_{0V} / C_{5V}$  is expressed by three-digit alphanumeric (e.g. **034** is  $C_{0V} / C_{5V} =3.4$ )
- ⑥ Ratio
- ⑦ There are two varactors inside, which can be used in parallel. For a single Varactor product, this letter is omitted.