MSKSEMI 美森科













ESD

TSS -

MOV

GDT

PIFD

IRFH7932PBF-MS

Product specification





Description

The IRFH7932PBF-MS uses advanced trench technology to provide excellent RDS(ON), low gate charge and operation with gate voltages as low as 4.5V. This device is suitable for use as a Battery protection or in other Switching application.

Features

- VDS = 30V ID=150A
- RDS(ON) < $2.4m\Omega$ VGS=10V

Application

- Battery protection
- Load switch
- Uninterruptible power supply

Reference News

DFN5X6-8L	N-Channel MOSFET	Marking
GS S S D D D D D D D D D D D D D D D D D	G S	MSKSEMI H7932 N30

Absolute Maximum Ratings (Tc=25°C unless otherwise noted)

Symbol	Parameter	Rating	Units
VDS	Drain-Source Voltage	30	V
Vgs	Gate-Source Voltage	±20	V
ID@Tc=25℃	Continuous Drain Current, VGS @ 10V 1	150	А
ID@Tc=100°C	Continuous Drain Current, V _G s @ 10V ¹	80	А
lом	Pulsed Drain Current ²	160	Α
EAS	Single Pulse Avalanche Energy ³	180	mJ
las	Avalanche Current	60	Α
Pb@Tc=25℃	Total Power Dissipation ⁴	187	W
Тѕтс	Storage Temperature Range	-55 to 150	$^{\circ}\mathbb{C}$
TJ	Operating Junction Temperature Range	-55 to 150	$^{\circ}$ C
RөJA	Thermal Resistance Junction-Ambient ¹	62	°C/W
Rejc	Thermal Resistance Junction-Case ¹	1.1	°C/W



Electrical Characteristics (TJ=25°C unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
BVDSS	Drain-Source Breakdown Voltage	Vgs=0V , Ip=250uA	30			V
△BVoss/△TJ	BV _{DSS} Temperature Coefficient	Reference to 25℃, l₀=1mA		0.014		V/°C
Descent	Static Drain-Source On-Resistance ²	Vgs=10V , Ip=30A		2	2.4	m0
Rds(on)	Static Dialii-Source Oil-Resistance	Vgs=4.5V , ID=15A		2.5	3.2	mΩ
V _{GS(th)}	Gate Threshold Voltage	-Vgs=Vps , lp =250uA	1.2		2.5	V
$\triangle V$ GS(th)	V _{GS(th)} Temperature Coefficient	VGS-VDS , ID -250UA		-4		mV/℃
1	Drain Source Leakage Current	V _{DS} =24V , V _{GS} =0V , T _J =25°C			1	uA ·
IDSS	Drain-Source Leakage Current	V _{DS} =24V , V _{GS} =0V , T _J =55°C			5	uA
Igss	Gate-Source Leakage Current VGS=±20V , VDS=0V				±100	nA
gfs	Forward Transconductance	V _{DS} =5V , I _D =30A		50		S
Rg	Gate Resistance	V _{DS} =0V , V _{GS} =0V , f=1MHz		1.7		Ω
Qg	Total Gate Charge (4.5V)			56.9		
Qgs	Gate-Source Charge	V _{DS} = 15V , V _{GS} = 10V , I _D = 15A		13.8		nC
Qgd	Gate-Drain Charge			23.5		
Td(on)	Turn-On Delay Time			20.1		
Tr	Rise Time	VDD=15V, VGS=10V,		6.3		20
T _{d(off)}	Turn-Off Delay Time R _G =3.3Ω, l _D =1A			124.6		ns
Tf	Fall Time			15.8		
Ciss	Input Capacitance			4345		
Coss	Output Capacitance	V _{DS} =15V , V _{GS} =0V , f=1MHz		340		pF
Crss	Reverse Transfer Capacitance			225		

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
ls	Continuous Source Current ^{1,6}	V _G =V _D =0V , Force Current			150	Α
VsD	Diode Forward Voltage ²	V _{GS} =0V , I _S =1A , T _J =25℃			1.2	V

Note:

^{1.}The data tested by surface mounted on a 1 inch² FR-4 board with 2OZ copper.

^{2.}The data tested by pulsed , pulse width \geq 300us , duty cycle \geq 2%

^{3.} The EAS data shows Max. rating . The test condition is V_{DD} =25V, V_{GS} =10V, L=0.1mH, I_{AS} =60A

^{4.}The power dissipation is limited by 150°C junction temperature

^{5.} The data is theoretically the same as ID and IDM, in real applications, should be limited by total power dissipation. 6. Package limitation current is 85A.



Typical Characteristics

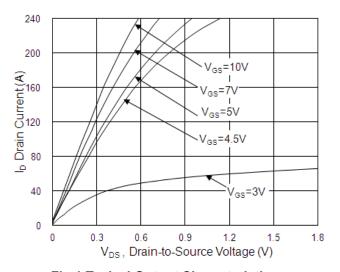


Fig.1 Typical Output Characteristics

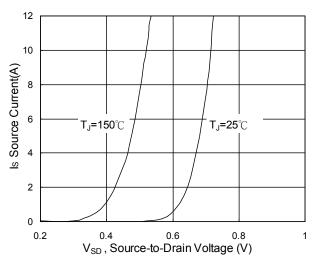


Fig.3 Forward Characteristics of Reverse

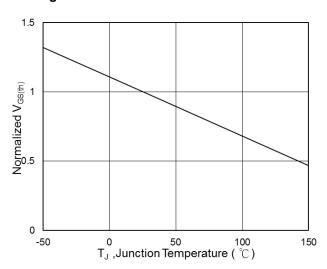


Fig.5 Normalized V_{GS(th)} v.s T_J

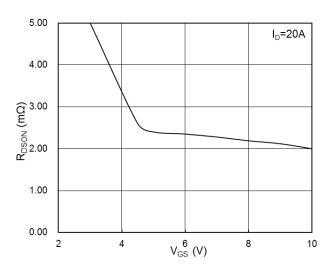


Fig.2 On-Resistance v.s Gate-Source

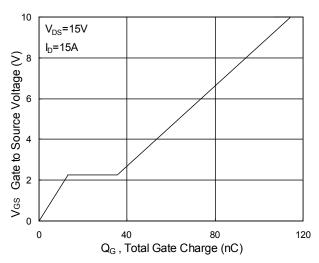


Fig.4 Gate-Charge Characteristics

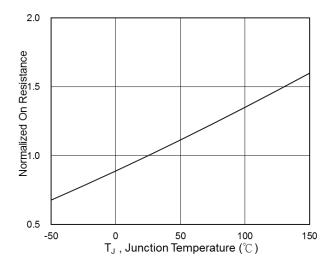
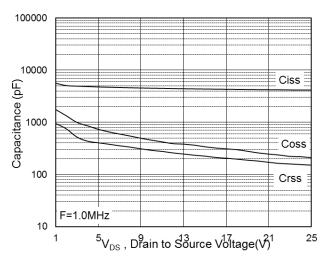


Fig.6 Normalized R_{DSON} v.s T_J





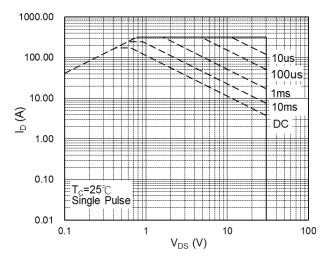


Fig.7 Capacitance

Fig.8 Safe Operating Area

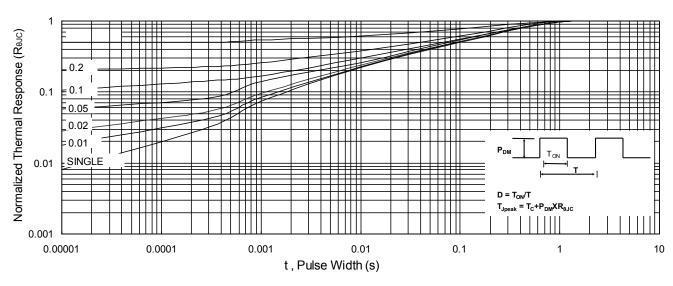


Fig.9 Normalized Maximum Transient Thermal Impedance

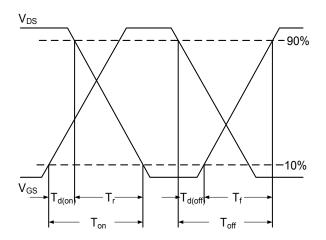


Fig.10 Switching Time Waveform


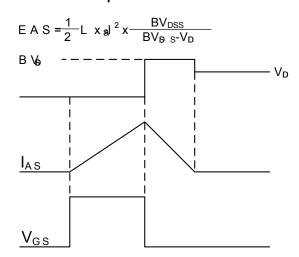


Fig.11 Unclamped Inductive Switching Waveform



DFN5X6-8L Package Information

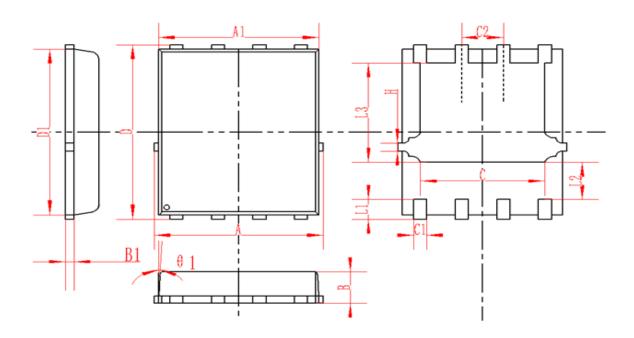

SYMBOL	MM			INCH			
STIVIDOL	MIN	NOM	MAX	MIN NOM		MAX	
А	4.95	5	5.05	0.195	0.197	0.199	
A1	4.82	4.9	4.98	0.190	0.193	0.196	
D	5.98	6	6.02	0.235	0.236	0.237	
D1	5.67	5.75	5.83	0.223	0.226	0.230	
В	0.9	0.95	1	0.035	0.037	0.039	
B1	0.254REF 0.010REF						
С	3.95	4	4.05	0.156	0.157	0.159	
C1	0.35	0.4	0.45	0.014	0.016	0.018	
C2	1.27TYP			0.5TYP			
θ1	8°	10°	12°	8°	10°	12°	
L1	0.63	0.64	0.65	0.025	0.025	0.026	
L2	1.2	1.3	1.4	0.047	0.051	0.055	
L3	3.415	3.42	3.425	0.134	0.135	0.135	
Н	0.24	0.25	0.26	0.009	0.010	0.010	

REEL SPECIFICATION

P/N	PKG	QTY
IRFH7932PBF-MS	DFN5X6-8L	5000



Attention

- Any and all MSKSEMI Semiconductor products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your MSKSEMI Semiconductor representative nearest you before using any MSKSEMI Semiconductor products described or contained herein in such applications.
- MSKSEMI Semiconductor assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all MSKSEMI Semiconductor products described or contained herein.
- Specifications of any and all MSKSEMI Semiconductor products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer'sproducts or equipment.
- MSKSEMI Semiconductor. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with someprobability. It is possiblethat these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents—or events cannot occur. Such measures include but are not limited to protective circuits anderror prevention circuitsfor safedesign, redundant design, and structural design.
- In the event that any or all MSKSEMI Semiconductor products (including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from theauthorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of MSKSEMI Semiconductor.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. MSKSEMI Semiconductor believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. Whendesigning equipment, referto the "Delivery Specification" for the MSKSEMI Semiconductor productthat you intend to use.