



SGM2053S

500mA, Ultra-Low Dropout, Low Power, RF Linear Regulator

GENERAL DESCRIPTION

The SGM2053S is a low power, low noise, fast transient response and low dropout voltage linear regulator which is designed using CMOS technology. It provides 500mA output current capability. The operating input voltage range is from 1.6V to 5.5V. The adjustable output voltage range is from 0.8V to 5.0V.

Other features include logic-controlled shutdown mode, short-circuit current limit and thermal shutdown protection. The SGM2053S has automatic discharge function to quickly discharge V_{OUT} in the disabled status.

The SGM2053S is available in Green SOT-23-6 and SOT-23-5 packages. It operates over an operating temperature range of -40°C to $+125^{\circ}\text{C}$.

FEATURES

- Operating Input Voltage Range: 1.6V to 5.5V
- Enable Pin Accept Voltages Higher than the Supply Voltage and up to 5.5V
- Fixed Output from 1.0V to 3.3V
- Adjustable Output from 0.8V to 5.0V
- 500mA Output Current
- Ultra-Low Dropout Voltage:
245mV (TYP) at $V_{OUT} = 5.0\text{V}$
- Shutdown Supply Current: 0.05 μA (TYP)
- High PSRR: 76dB (TYP) at 1kHz
- Turn-On Time: 80 μs (TYP)
- Current Limiting and Thermal Protection
- Excellent Load and Line Transient Responses
- With Output Automatic Discharge
- Stable with Small Case Size Ceramic Capacitors
- -40°C to $+125^{\circ}\text{C}$ Operating Temperature Range
- Available in Green SOT-23-6 and SOT-23-5 Packages

APPLICATIONS

Portable Equipment

Smartphone

Industrial and Medical Equipment

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2053S-ADJ	SOT-23-6	-40°C to +125°C	SGM2053S-ADJXN6G/TR	04TXX	Tape and Reel, 3000
SGM2053S-1.0	SOT-23-6	-40°C to +125°C	SGM2053S-1.0XN6G/TR	09QXX	Tape and Reel, 3000
SGM2053S-1.05	SOT-23-6	-40°C to +125°C	SGM2053S-1.05XN6G/TR	0FOXX	Tape and Reel, 3000
SGM2053S-1.1	SOT-23-6	-40°C to +125°C	SGM2053S-1.1XN6G/TR	0FPXX	Tape and Reel, 3000
SGM2053S-1.2	SOT-23-6	-40°C to +125°C	SGM2053S-1.2XN6G/TR	1ULXX	Tape and Reel, 3000
SGM2053S-1.8	SOT-23-6	-40°C to +125°C	SGM2053S-1.8XN6G/TR	0FQXX	Tape and Reel, 3000
SGM2053S-2.5	SOT-23-6	-40°C to +125°C	SGM2053S-2.5XN6G/TR	1UMXX	Tape and Reel, 3000
SGM2053S-2.8	SOT-23-6	-40°C to +125°C	SGM2053S-2.8XN6G/TR	0FRXX	Tape and Reel, 3000
SGM2053S-3.0	SOT-23-6	-40°C to +125°C	SGM2053S-3.0XN6G/TR	0FSXX	Tape and Reel, 3000
SGM2053S-3.3	SOT-23-6	-40°C to +125°C	SGM2053S-3.3XN6G/TR	0FTXX	Tape and Reel, 3000
SGM2053S-ADJ	SOT-23-5	-40°C to +125°C	SGM2053S-ADJXN5G/TR	0CNXX	Tape and Reel, 3000
SGM2053S-1.0	SOT-23-5	-40°C to +125°C	SGM2053S-1.0XN5G/TR	0FUXX	Tape and Reel, 3000
SGM2053S-1.05	SOT-23-5	-40°C to +125°C	SGM2053S-1.05XN5G/TR	0DGXX	Tape and Reel, 3000
SGM2053S-1.1	SOT-23-5	-40°C to +125°C	SGM2053S-1.1XN5G/TR	0DHXX	Tape and Reel, 3000
SGM2053S-1.2	SOT-23-5	-40°C to +125°C	SGM2053S-1.2XN5G/TR	1UNXX	Tape and Reel, 3000
SGM2053S-1.35	SOT-23-5	-40°C to +125°C	SGM2053S-1.35XN5G/TR	1LHXX	Tape and Reel, 3000
SGM2053S-1.8	SOT-23-5	-40°C to +125°C	SGM2053S-1.8XN5G/TR	0DIXX	Tape and Reel, 3000
SGM2053S-2.5	SOT-23-5	-40°C to +125°C	SGM2053S-2.5XN5G/TR	1LIXX	Tape and Reel, 3000
SGM2053S-2.8	SOT-23-5	-40°C to +125°C	SGM2053S-2.8XN5G/TR	0FVXX	Tape and Reel, 3000
SGM2053S-3.0	SOT-23-5	-40°C to +125°C	SGM2053S-3.0XN5G/TR	0FWXX	Tape and Reel, 3000
SGM2053S-3.3	SOT-23-5	-40°C to +125°C	SGM2053S-3.3XN5G/TR	0COXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XX = Date Code.

SOT-23-6/SOT-23-5

YYY X X

Date Code - Week

Date Code - Year

Serial Number

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

IN to GND	-0.3V to 6V
EN to GND	-0.3V to 6V
OUT, BP, ADJ to GND	-0.3V to ($V_{IN} + 0.3V$)
Package Thermal Resistance	
SOT-23-6, θ_{JA}	207°C/W
SOT-23-6, θ_{JB}	70°C/W
SOT-23-6, θ_{JC}	124°C/W
SOT-23-5, θ_{JA}	221°C/W
SOT-23-5, θ_{JB}	74°C/W
SOT-23-5, θ_{JC}	120°C/W
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM	3000V
CDM	1000V

RECOMMENDED OPERATING CONDITIONS

Input Supply Voltage Range	1.6V to 5.5V
Enable Input Voltage Range	0V to 5.5V
Input Effective Capacitance, C_{IN}	0.5 μ F (MIN)
Output Effective Capacitance, C_{OUT}	1 μ F to 10 μ F
Operating Junction Temperature Range	-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.





ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

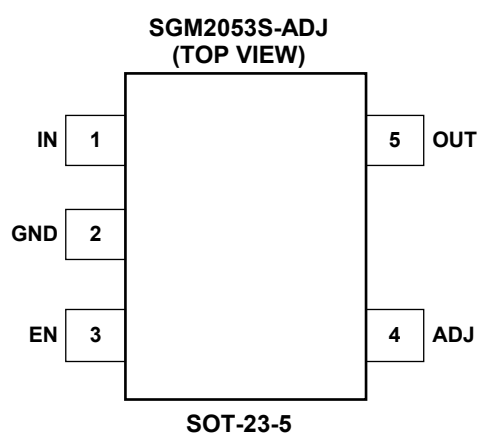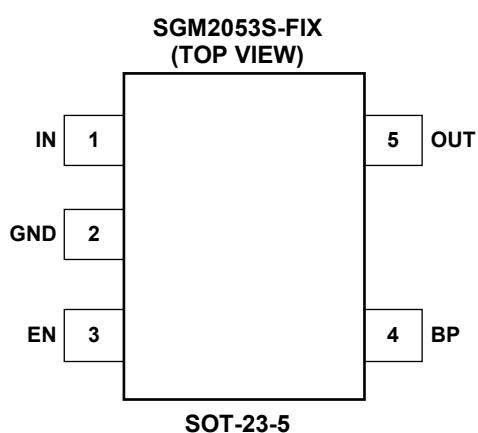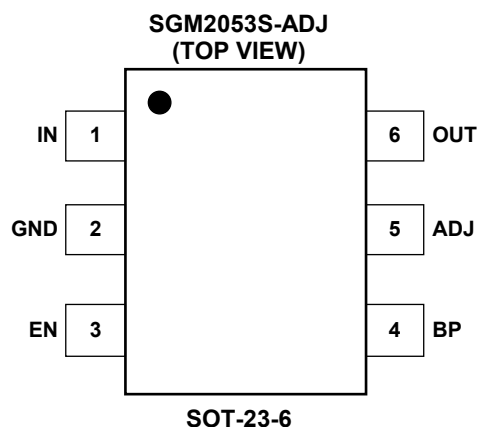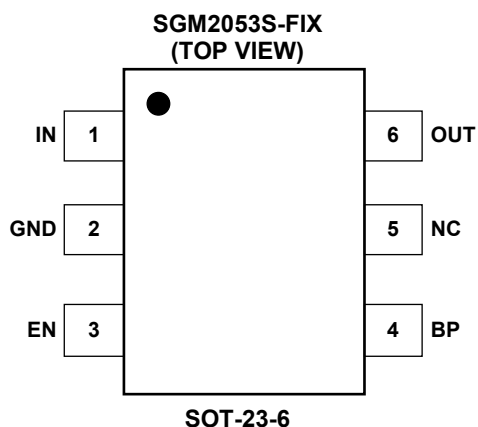

PIN DESCRIPTION

PIN		NAME	FUNCTION
SOT-23-6	SOT-23-5		
1	1	IN	Input Voltage Supply Pin. It is recommended to use a 1 μ F or larger ceramic capacitor from IN pin to ground to get good power supply decoupling.
2	2	GND	Ground.
3	3	EN	Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator. The EN pin has an internal pull-down resistance which ensures that the device is turned off when the EN pin is floated.
4	4	BP	Reference-Noise Bypass Pin (fixed voltage version only for SOT-23-5 package). Bypass with an external capacitor C _{BP} can reduce output noise to very low level. If not used, this pin must be left floating.
5	4	ADJ	Feedback Input Pin (adjustable voltage version only). Connect this pin to the external resistor divider to adjust the output voltage. Place the resistors as close as possible to this pin.
	—	NC	Not Connected (fixed voltage version only).
6	5	OUT	Regulator Output Pin. It is recommended to use an output capacitor with effective capacitance in the range of 1 μ F to 10 μ F to ensure stability. This ceramic capacitor should be placed as close as possible to OUT pin.

FUNCTIONAL BLOCK DIAGRAMS

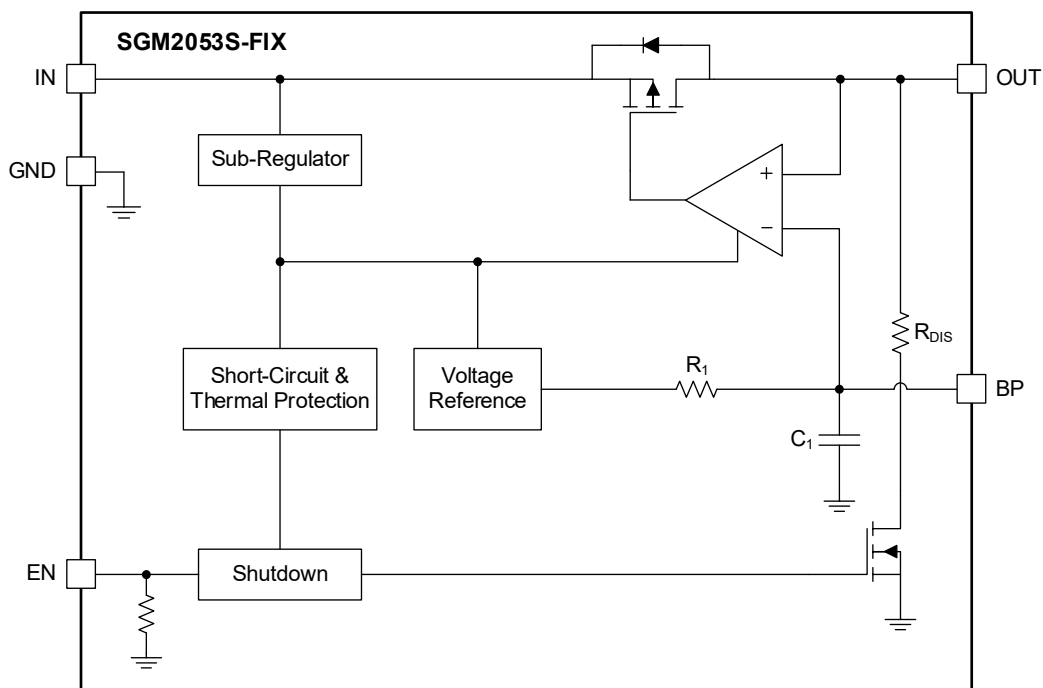


Figure 1. Fixed Output Regulator Block Diagram

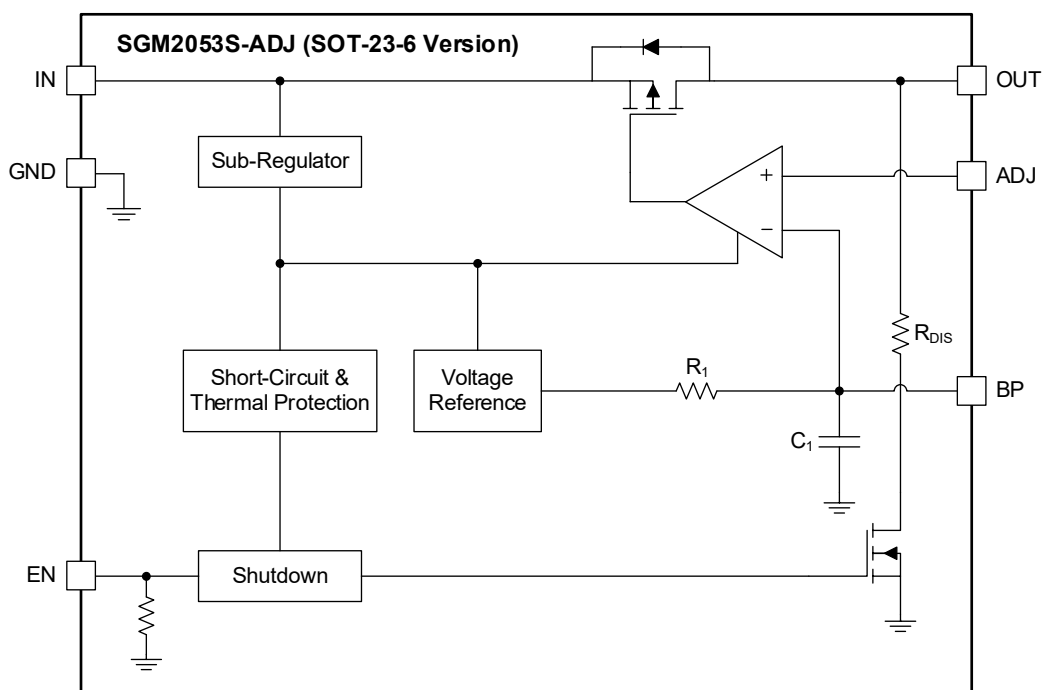


Figure 2. Adjustable Output Regulator Block Diagram (For SOT-23-5 Version, BP Pin Floating)

ELECTRICAL CHARACTERISTICS

($V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 1.6V (whichever is greater). For SGM2053S-ADJ, $V_{OUT} = 0.8V$, $V_{ADJ} = V_{OUT}$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$ and $C_{BP} = 22nF$, $T_J = -40^\circ C$ to $+125^\circ C$, typical values are at $T_J = +25^\circ C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Voltage Range	V _{IN}			1.6		5.5	V
Output Voltage Accuracy	V _{OUT}	V _{IN} = (V _{OUT(NOM)} + 0.5V) to 5.5V, I _{OUT} = 0.1mA	T _J = +25°C	-2.5		2.5	%
			T _J = -40°C to +125°C	-3		3	
Feedback Voltage	V _{ADJ}	V _{IN} = (V _{OUT(NOM)} + 0.5V) to 5.5V, I _{OUT} = 0.1mA	T _J = +25°C	0.78	0.8	0.82	V
			T _J = -40°C to +125°C	0.776		0.824	
ADJ Pin Input Bias Current	I _{ADJ}	V _{ADJ} = 0.9V			1	20	nA
Under-Voltage Lockout Thresholds	V _{UVLO}	V _{IN} rising			1.45	1.6	V
		V _{IN} falling			1.3		
Line Regulation	ΔV _{LNR}	V _{IN} = (V _{OUT(NOM)} + 0.5V) to 5.5V, I _{OUT} = 0.1mA			0.2	6.5	mV
Load Regulation	ΔV _{LDR} /I _{OUT}	I _{OUT} = 0.1mA to 500mA	Fixed voltage version		0.06	0.5	mV/mA
			Adjustable voltage version		0.001	0.02	mV/mA
Dropout Voltage	V _{DROP}	V _{OUT} = V _{OUT(NOM)} × 95%, I _{OUT} = 300mA	V _{OUT(NOM)} = 0.8V		860	980	mV
			V _{OUT(NOM)} = 1.0V		680	840	
			V _{OUT(NOM)} = 1.05V		645	835	
			V _{OUT(NOM)} = 1.1V		615	830	
			V _{OUT(NOM)} = 1.8V		305	450	
			V _{OUT(NOM)} = 2.8V		200	310	
			V _{OUT(NOM)} = 3.0V		190	290	
			V _{OUT(NOM)} = 3.3V		180	280	
			V _{OUT(NOM)} = 5.0V		145	220	
		V _{OUT} = V _{OUT(NOM)} × 95%, I _{OUT} = 500mA	V _{OUT(NOM)} = 0.8V		1120	1300	mV
			V _{OUT(NOM)} = 1.0V		940	1180	
			V _{OUT(NOM)} = 1.05V		905	1150	
			V _{OUT(NOM)} = 1.1V		875	1140	
			V _{OUT(NOM)} = 1.8V		495	720	
			V _{OUT(NOM)} = 2.8V		335	500	
			V _{OUT(NOM)} = 3.0V		315	470	
			V _{OUT(NOM)} = 3.3V		300	460	
			V _{OUT(NOM)} = 5.0V		245	350	
Output Current Limit	I _{LIMIT}	V _{IN} = Min((V _{OUT(NOM)} + 2V), 5.5V), V _{OUT} = V _{OUT(NOM)} × 85%	T _J = -40°C to +85°C	500	730		mA
			T _J = -40°C to +125°C	450			
Short-Circuit Current Limit	I _{SHORT}	V _{OUT} = 0V, V _{IN} = 5.5V			380		mA
Ground Pin Current	I _Q	No load, V _{EN} = V _{IN} = 5.5V			30	60	μA
Shutdown Current	I _{SHDN}	V _{EN} = 0V, V _{IN} = 5.5V			0.05	1	μA
EN Input Thresholds	V _{IH}	V _{IN} = 1.6V to 5.5V		1.5			V
	V _{IL}						
EN Input Bias Current	I _{ENH}	V _{EN} = V _{IN} = 5.5V			0.7	1.5	μA
	I _{ENL}	V _{EN} = 0V, V _{IN} = 5.5V			0.01	1	







ELECTRICAL CHARACTERISTICS (continued)

($V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 1.6V (whichever is greater). For SGM2053S-ADJ, $V_{OUT} = 0.8V$, $V_{ADJ} = V_{OUT}$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$ and $C_{BP} = 22nF$, $T_J = -40^{\circ}C$ to $+125^{\circ}C$, typical values are at $T_J = +25^{\circ}C$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Discharge Resistance	R_{DIS}	$V_{EN} = 0V$, $V_{OUT} = 0.3V$, $V_{IN} = 4V$		70		Ω
Turn-On Time	t_{ON}	From EN rising from 0V to V_{IN} to $V_{OUT(NOM)} \times 90\%$, $C_{BP} = 22nF$, no load		80		μs
Power Supply Rejection Ratio	PSRR	$C_{BP} = 0nF$, $C_{OUT} = 1\mu F$, $I_{OUT} = 30mA$, $V_{IN} = 2.8V$, $V_{OUT(NOM)} = 1.8V$, $\Delta V_{RIPPLE} = 0.2V_{P-P}$	$f = 217Hz$	82		dB
			$f = 1kHz$	76		
		$C_{BP} = 10nF$, $C_{OUT} = 1\mu F$, $I_{OUT} = 30mA$, $V_{IN} = 2.8V$, $V_{OUT(NOM)} = 1.8V$, $\Delta V_{RIPPLE} = 0.2V_{P-P}$	$f = 217Hz$	92		
			$f = 1kHz$	86		
Output Voltage Noise	e_n	$C_{BP} = 0nF$, $C_{OUT} = 1\mu F$, $V_{OUT(NOM)} = 1.8V$, $f = 10Hz$ to 100kHz	$I_{OUT} = 0mA$	18		μV_{RMS}
			$I_{OUT} = 30mA$	100		
		$C_{BP} = 10nF$, $C_{OUT} = 1\mu F$, $V_{OUT(NOM)} = 1.8V$, $f = 10Hz$ to 100kHz	$I_{OUT} = 0mA$	13		
			$I_{OUT} = 30mA$	60		
Thermal Shutdown Temperature	T_{SHDN}			160		$^{\circ}C$
Thermal Shutdown Hysteresis	ΔT_{SHDN}			20		$^{\circ}C$







TYPICAL PERFORMANCE CHARACTERISTICS

$T_J = +25^\circ\text{C}$, $V_{IN} = V_{OUT(NOM)} + 1\text{V}$, $V_{OUT} = 0.8\text{V}$, $V_{ADJ} = V_{OUT}$, $C_{IN} = 2.2\mu\text{F}$, $C_{OUT} = 1\mu\text{F}$ and $C_{BP} = 22\text{nF}$, unless otherwise noted.

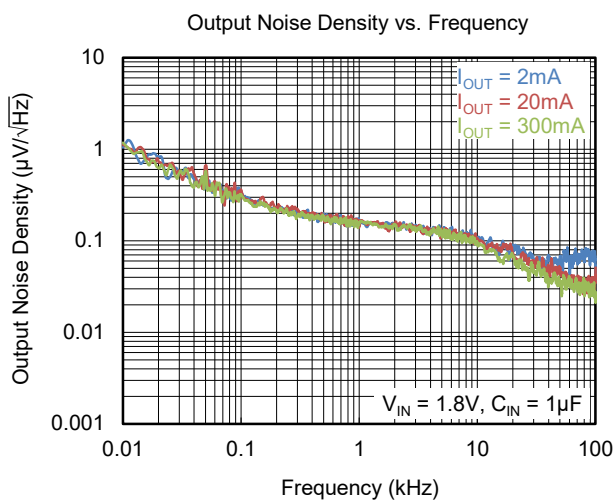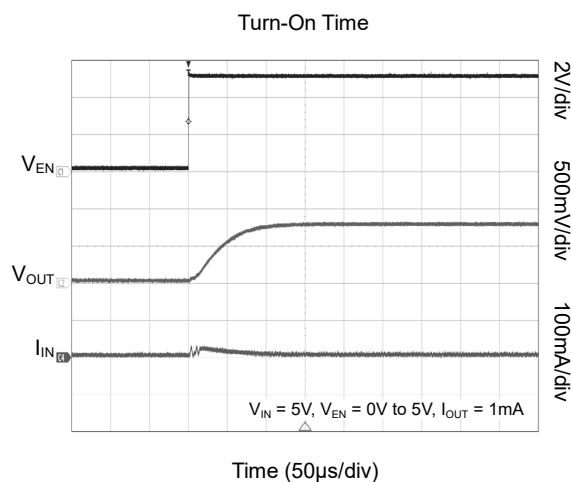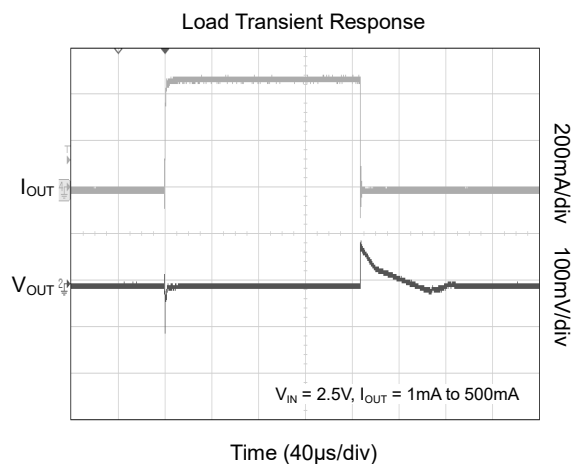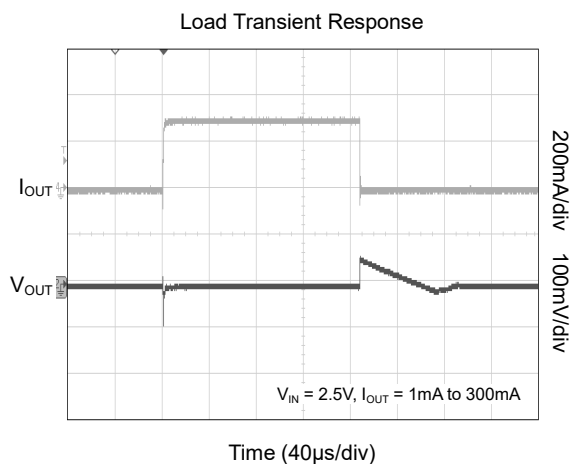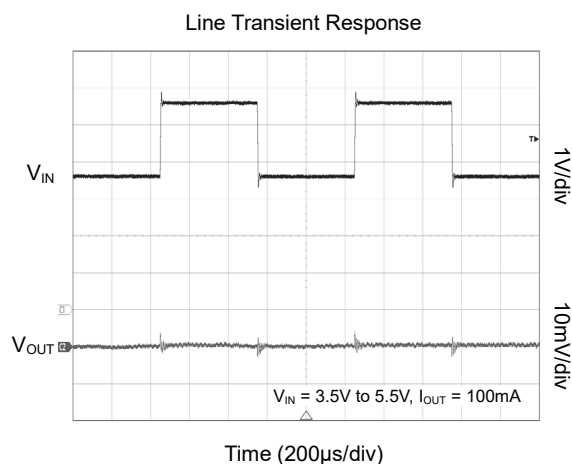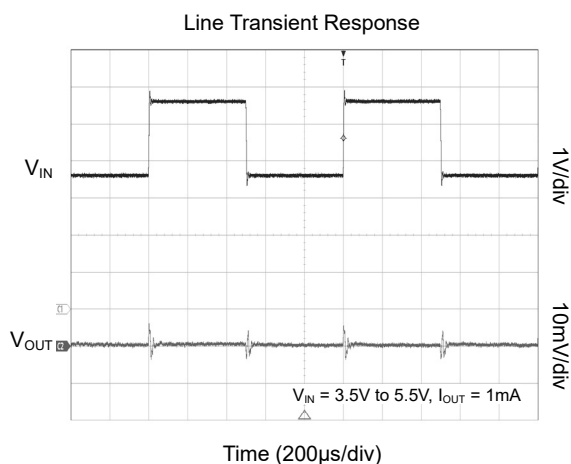

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = +25^\circ\text{C}$, $V_{IN} = V_{OUT(NOM)} + 1\text{V}$, $V_{OUT} = 0.8\text{V}$, $V_{ADJ} = V_{OUT}$, $C_{IN} = 2.2\mu\text{F}$, $C_{OUT} = 1\mu\text{F}$ and $C_{BP} = 22\text{nF}$, unless otherwise noted.

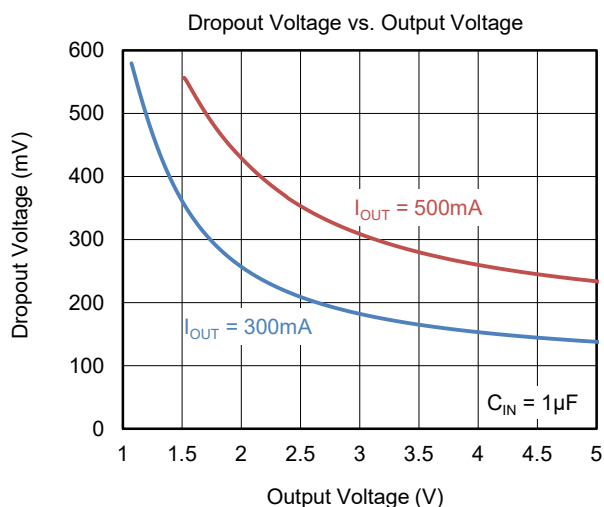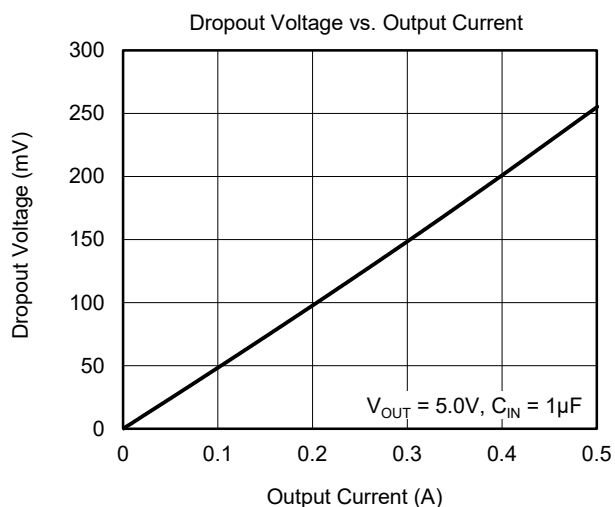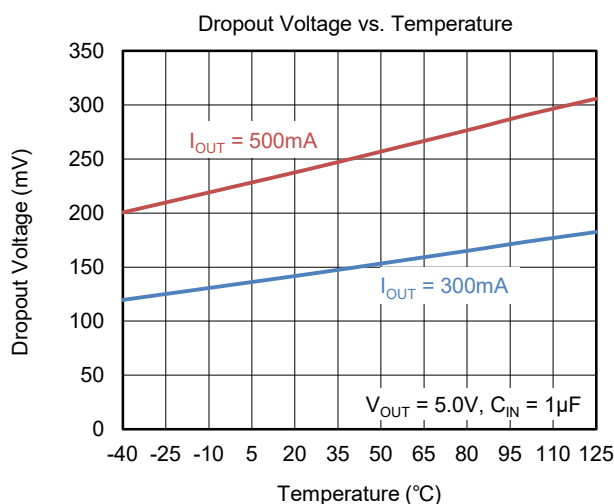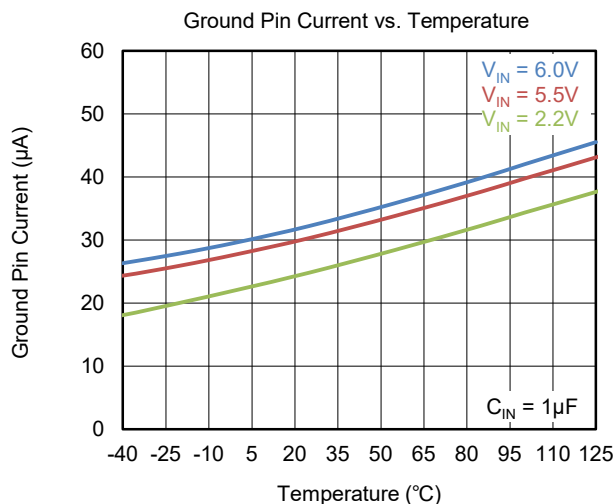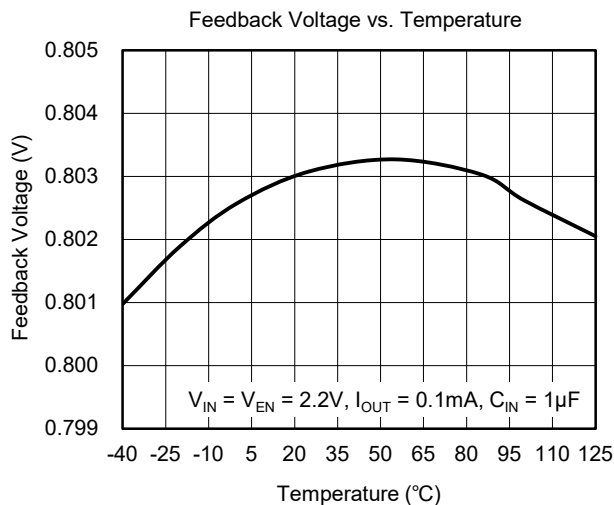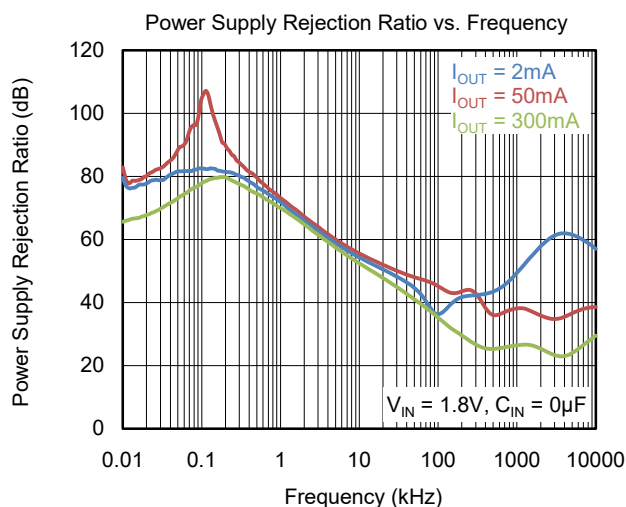

TYPICAL APPLICATION CIRCUITS

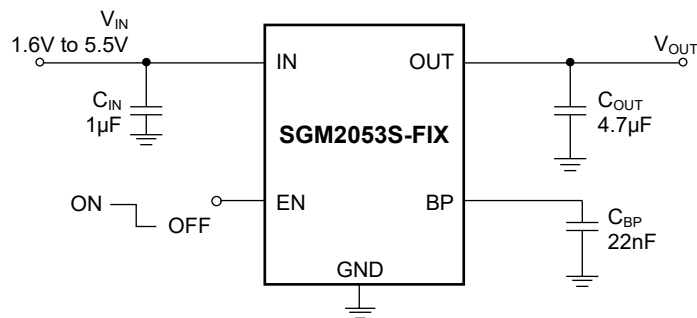


Figure 3. Fixed Output Voltage Version

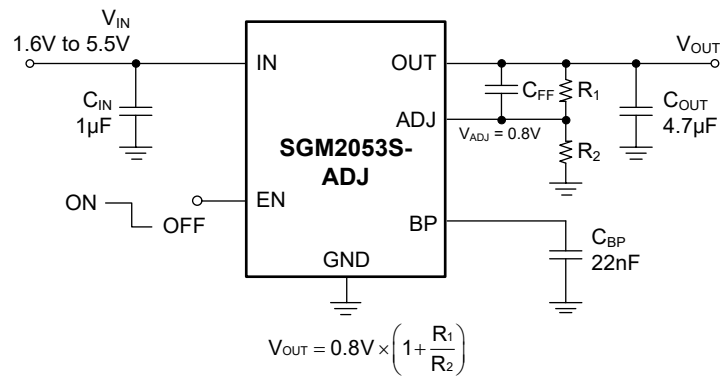


Figure 4. Adjustable Output Voltage Version (SOT-23-6 Version)

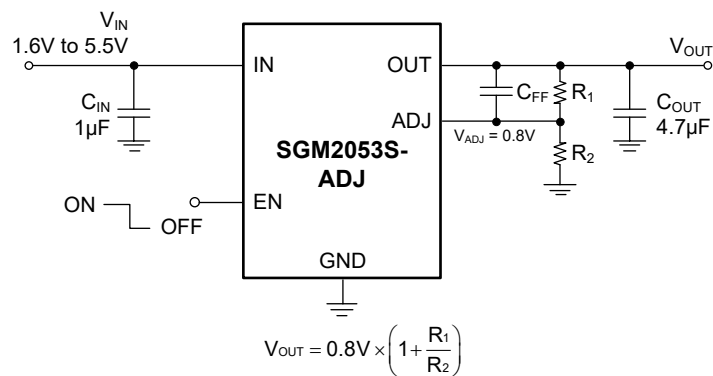


Figure 5. Adjustable Output Voltage Version (SOT-23-5 Version)

APPLICATION INFORMATION

The SGM2053S is a low input voltage, low noise and low dropout LDO and provides 500mA output current. These features make the device a reliable solution to solve many challenging problems in the generation of clean and accurate power supply. The high performance also makes the SGM2053S useful in a variety of applications. The SGM2053S provides the protection functions for output overload, output short-circuit condition and overheating.

The SGM2053S provides an EN pin as an external chip enable control to enable/disable the device. When the regulator is in shutdown state, the shutdown current consumes as low as 0.05μA (TYP).

Input Capacitor Selection (C_{IN})

The input decoupling capacitor should be placed as close as possible to the IN pin to ensure the device stability. A 1μF or greater X7R or X5R ceramic capacitor is selected to get good dynamic performance.

When V_{IN} is required to provide large current instantaneously, a large effective input capacitor is required. Multiple input capacitors can reduce the impact from input trace inductance. Adding more input capacitors is available to restrict the ringing and to keep it below the device absolute maximum ratings. For C_{OUT} with larger capacitance, it is recommended to choose the larger capacitance C_{IN} .

Output Capacitor Selection (C_{OUT})

One or more output capacitors are required to maintain the stability of the LDO, and the output capacitors should be placed as close as possible to the OUT pin. In addition, in order to obtain the best transient performance, it is recommended to use X7R and X5R ceramic capacitors as output capacitors. Ceramic capacitors have low equivalent series resistance (ESR), excellent temperature and DC bias characteristics. However, it cannot be ignored that the effective capacitance of ceramic capacitors is affected by temperature, DC bias and package size.

For example, Figure 6 shows the capacitance and DC bias and temperature characteristics of 0805, 10V, 10μF±10%, X7R capacitor. Therefore, it is necessary to evaluate whether the effective capacitance of the output capacitor can meet the stability requirements of the LDO in practical applications. In general, a capacitor in higher voltage rating and a larger package exhibits better stability, and the effective capacitance can be obtained from the manufacturer datasheet.

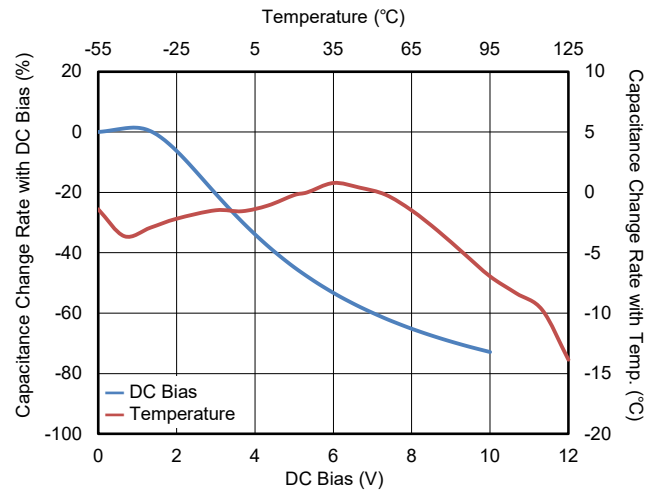


Figure 6. Capacitance vs. DC Bias and Temperature Characteristics

The SGM2053S requires a minimum effective capacitance of 1μF for C_{OUT} to ensure stability. Additionally, C_{OUT} with larger capacitance and lower ESR will help increase the high frequency PSRR and improve the load transient response.

Adjustable Regulator

The output voltage of the SGM2053S-ADJ can be adjusted from 0.8V to 5.0V. The ADJ pin will be connected to two external resistors as shown in Figure 7, the output voltage is determined by the following equation:

$$V_{OUT} = V_{ADJ} \times \left(1 + \frac{R_1}{R_2}\right) \quad (1)$$

where:

V_{OUT} is output voltage and V_{ADJ} is the internal voltage reference, $V_{ADJ} = 0.8V$.

One parallel capacitor (C_{FF}) with R_1 can be used to improve the feedback loop stability and PSRR, increase the transient response and reduce the output noise. Use $R_2 = 160k\Omega$ to maintain a 5μA minimum load.

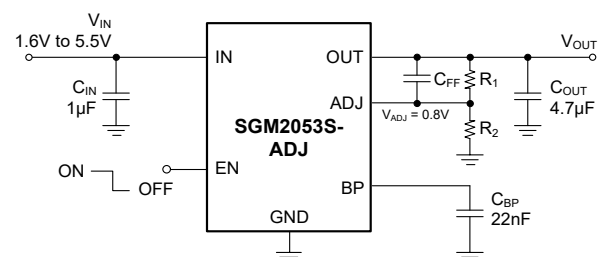


Figure 7. Adjustable Output Voltage Application (SOT-23-6 Version)

APPLICATION INFORMATION (continued)

Enable Operation

The EN pin of the SGM2053S is used to enable/disable its device and to deactivate/activate the output automatic discharge function.

When the EN pin voltage is lower than 0.4V, the device is in shutdown state. There is no current flowing from IN to OUT pins. In this state, the automatic discharge transistor is active to discharge the output voltage through a 70Ω (TYP) resistor.

When the EN pin voltage is higher than 1.5V, the device is in active state. The output voltage is regulated to the expected value and the automatic discharge transistor is turned off.

The EN pin is pulled down by an internal pull-down resistor when the EN pin is floated. This resistance will ensure the SGM2053S in shutdown state and reduce the power dissipation in system.

Reverse Current Protection

The power transistor has an inherent body diode. This body diode will be forward biased when $V_{OUT} > (V_{IN} + 0.3V)$. When $V_{OUT} > (V_{IN} + 0.3V)$, the reverse current flowing from the OUT pin to the IN pin will damage the SGM2053S. If $V_{OUT} > (V_{IN} + 0.3V)$ event would happen in system, one external Schottky diode will be added between OUT pin and IN pin in circuit design to protect the SGM2053S.

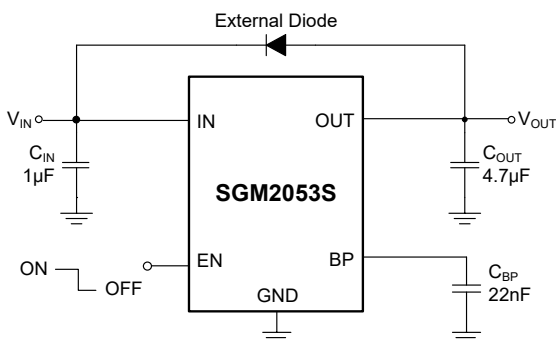


Figure 8. Reverse Protection Reference Design

Negatively Biased Output

When the output voltage is negative, the chip may not start up due to parasitic effects. Ensure that the output is greater than -0.3V under all conditions. If negatively biased output is excessive and expected in the application, a Schottky diode can be added between the OUT pin and GND pin.

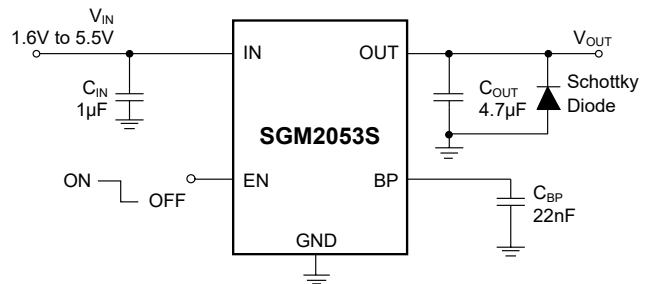


Figure 9. Negatively Biased Output Application

Output Current Limit and Short-Circuit Protection

When overload events happen, the output current is internally limited to 730mA (TYP). When the OUT pin is shorted to ground, the short-circuit protection will limit the output current to 380mA (TYP).

Thermal Shutdown

When the die temperature exceeds the threshold value of thermal shutdown, the SGM2053S will be in shutdown state and it will remain in this state until the die temperature decreases to +140°C.

Power Dissipation (P_D)

Power dissipation (P_D) of the SGM2053S can be calculated by the equation $P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$. The maximum allowable power dissipation ($P_{D(MAX)}$) of the SGM2053S is affected by many factors, including the difference between junction temperature and ambient temperature ($T_{J(MAX)} - T_A$), package thermal resistance from the junction to the ambient environment (θ_{JA}), the rate of ambient airflow and PCB layout. $P_{D(MAX)}$ can be approximated by the following equation:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA} \quad (2)$$



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


SEPTEMBER 2025 – REV.A.2 to REV.A.3	Page
Updated Package/Ordering Information section.....	2
DECEMBER 2024 – REV.A.1 to REV.A.2	Page
Updated Pin Description section.....	4
AUGUST 2024 – REV.A to REV.A.1	Page
Added SGM2053S-1.35XN5G/TR and SGM2053S-2.5XN5G/TR to Package/Ordering Information section	2
Updated Application Information section.....	11, 12
Changes from Original (MARCH 2023) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

SOT-23-6

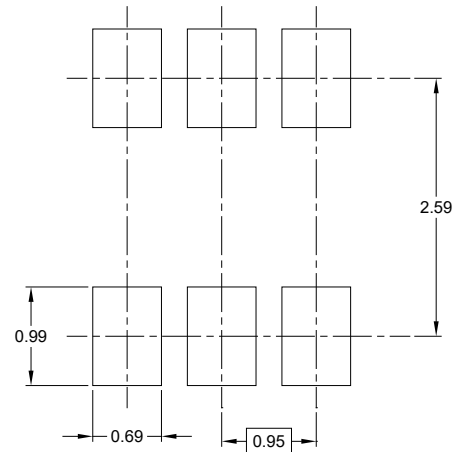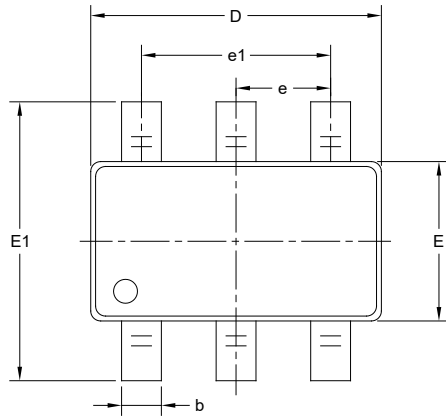

RECOMMENDED LAND PATTERN (Unit: mm)

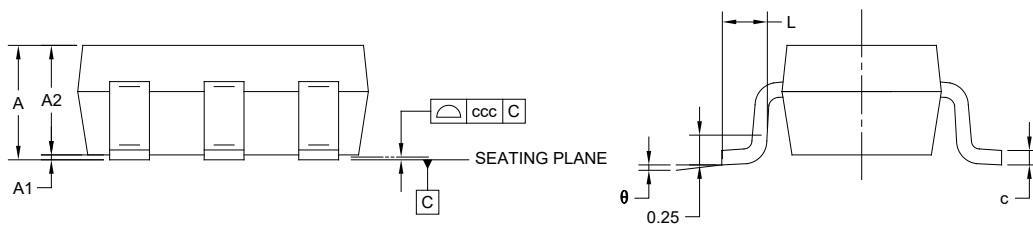



Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		

NOTES:



1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

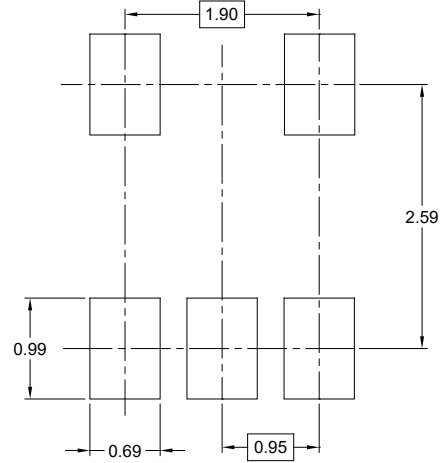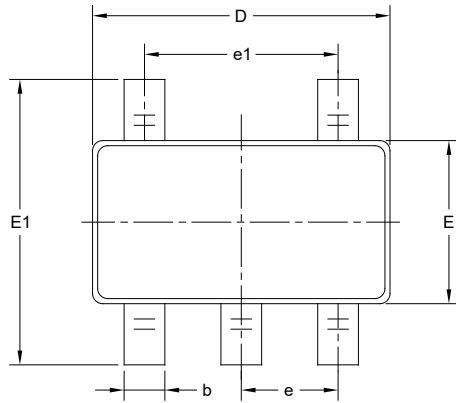

RECOMMENDED LAND PATTERN (Unit: mm)

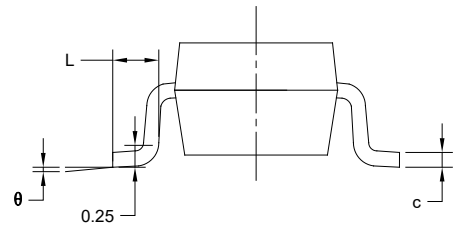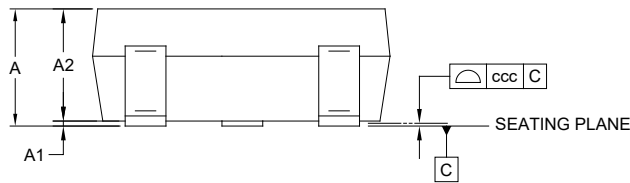

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		


NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

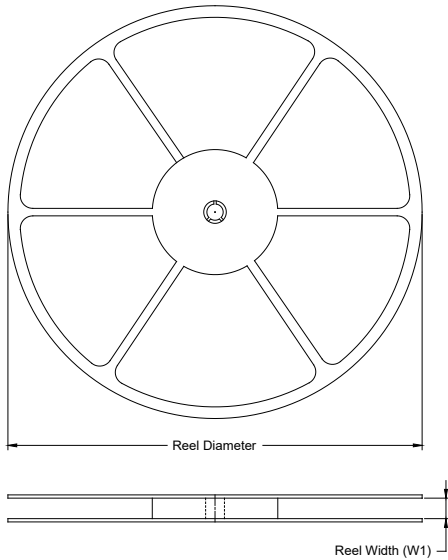

TAPE DIMENSIONS

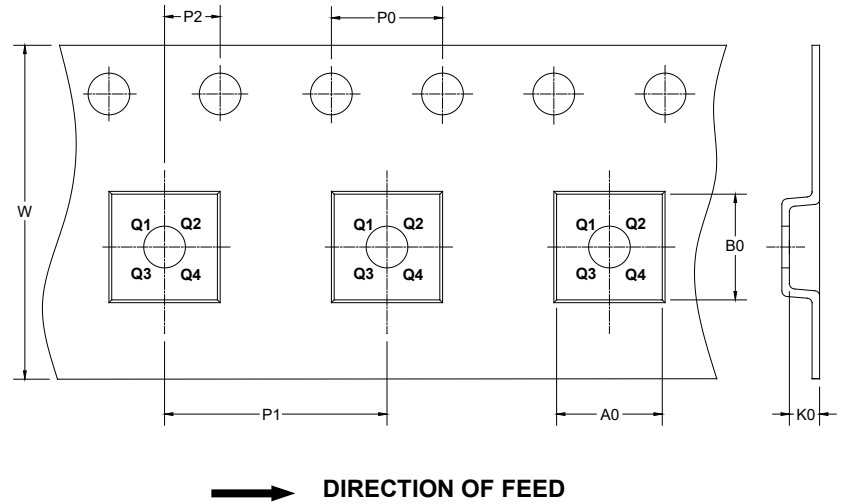

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-6	7"	9.5	3.23	3.17	1.37	4.0	4.0	2.0	8.0	Q3
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002