



洲光源
CHAULIGHT

产品规格书 SPECIFICATION

客户名称: _____

Customer Name

产品类型: 红外接收头

Product Name

产品型号: ZSIRM-Z1D3H81

Part No.

<input type="checkbox"/> 技术参考 Technical Reference		<input type="checkbox"/> 样品 Sample		<input type="checkbox"/> 量产供货 Mass Product	
客户审核 (加盖公章) Client approval (Stamp)		洲光源审核 Chaulight approval			
核准 Approval	确认 Checked	核准 Approval	确认 Checked	制作 Edited	
		谢小金	杨培续	赖华棋	
<input type="checkbox"/> 接收 Qualified		<input type="checkbox"/> 不接收 Disqualified		日期 Date: 2020.08.14	

地址(Add): 深圳市宝安区航城街道航空路 36 号华盛泰科技大厦 D 栋 502

No.502, Building D, Huashengtai Science and Technology Building, No. 36, Hangcheng Street, Bao'an District, Shenzhen

本规格书仅用于双方交流用需经双方签订后方可生效, 自签订后有效期为两年, 期满后需以书面形式续签。最终解释权为洲光源所有。

This product specification is only used for technical communication.Only after the signature or seal, the specifications have the force of law.since the signing of the validity period of two years, after the expiration of the written renewal. The final interpretation right is owned by the CHAULIGHT

ZSIRM-Z1D3H81 是一种红外接收器，用于远程控制和其他需要改进环境光抑制的应用。单独的 PIN 二极管和前置放大器 IC 电路组装在单个引线框架上。环氧树脂包装包含一个特殊的红外过滤器。该模块即使在受干扰的环境光应用中也具有良好的性能，并提供保护，防止不受控制的输出脉冲。

The ZSIRM-Z1D3H81 is infrared receivers for remote control and other applications requiring improved ambient light rejection.

The separate PIN diode and preamplifier IC are assembled on a single leadframe.

The epoxy package contains a special IR filter.

This module has excellent performance even in disturbed ambient light applications and provides protection against uncontrolled output pulses.



特性 Feature

--光电探测器和前置放大器放在一个包中

Photo detector and preamplifier in one package

--PCM 频率的内部滤波器

Internal filter for the PCM frequency

对环境光的高免疫力

High immunity against ambient light

改进了对电场干扰的屏蔽能力

Improved shielding against electric field disturbance

3.0 伏供电电压；低功耗

3.0-Volt supply voltage; low power consumption

TTL 和 CMOS 兼容性

TTL and CMOS compatibility

应用 Application

--电视,录像机,音响设备,空调,汽车立体声收音机,玩具,家庭电脑,所有需遥控设备

TV, VCR, audio equipment, air conditioning, car stereo radio, toys, home computer, all require remote control equipment

最大额定值 Absolute Maximum Ratings



测试项目 Parameter (Ta=25℃)	符合 Symbol	范围 Ratings	单位 Unit
电源电压 Supply voltage	Vcc	3.5V	V
工作温度 Operating Temperature	Topr	-25~+80	℃
储存温度 Storage Temperature	Tstg	-25~+80	℃
焊接温度 Lead Soldering Temperature*3	Tsol	260 (<5s)	℃

*1、在 25 摄氏度的环境中测试 below 25 Free Air Temperature

*2、脉宽少于等于 100us，占空比 1% Pulse width \leq 100 μ s, Duty cycle= 1%

*3、离胶体 2.5mm 以上焊接 5s 内 2.5mm form body for 5 seconds

产品尺寸 Package Dimension

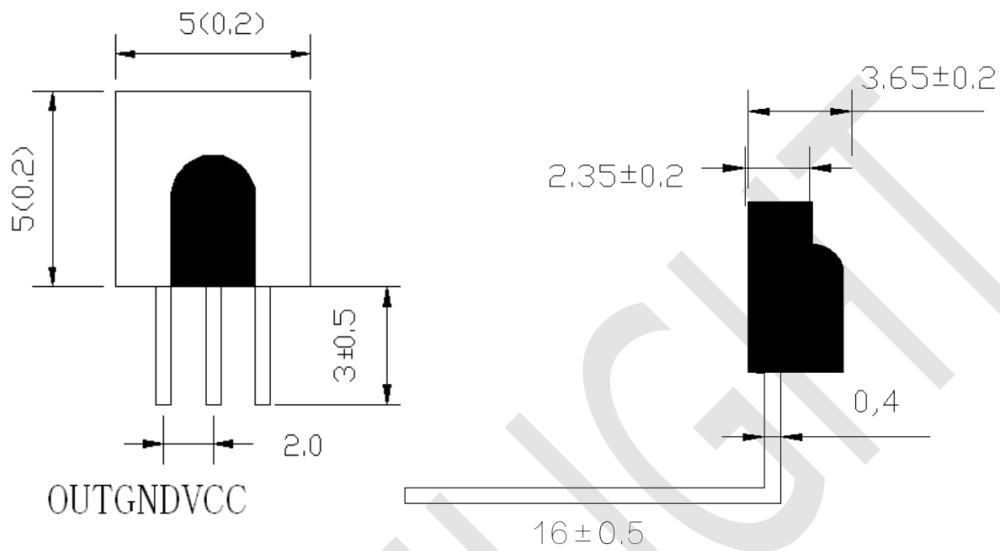

NOTE

1. PIN CONFIG

- ① Vout
- ② GND
- ③ Vcc

2. G.T:±0.3

3. Unit:mm

备注 Notes:

--所有尺寸为毫米标识

All dimensions are in millimeters

--未标识尺寸正负公差为 0.1mm

Tolerances unless dimensions ±0.1mm


光电特性 Electro-Optical Characteristics

电性参数 (温度=25℃) Parameter (Ta=25℃)	符号 Symbol	条件 Condition	最小值 Min.	典型值 Typ.	最大值 Max.	单位 Units
工作电压 working voltage	Vcc	--	--	3.5	--	V
静态电流 Supply Current	Icc	Input signal=0	--	--	2.5	mA
载波频率 B.P.F. Center Frequency	f _o	--	--	37.9	--	kHz
峰值波长 Peak Wavelength	λ _p	--	--	940	--	nm
低电平输出 Low Level Output Voltage	V _{ol}	--	--	0.10	0.50	mV
高电平输出 High Level Output Voltage	V _{oh}	Vcc=5.0v	2.4	--	--	V
脉冲宽度 pulse width	T _{pw}	--	400	--	800	μs
接收距离 Arrival Distance	L1	(θ =0°)	--	15	--	m
	L2	(θ =39°)	8	--	--	m
半角 Half angle	2 θ 1/2	--	--	±30	--	Deg


试验方法 Test Method

Output pulse width


Transmitter out carrier frequency(f_o)duty 50%

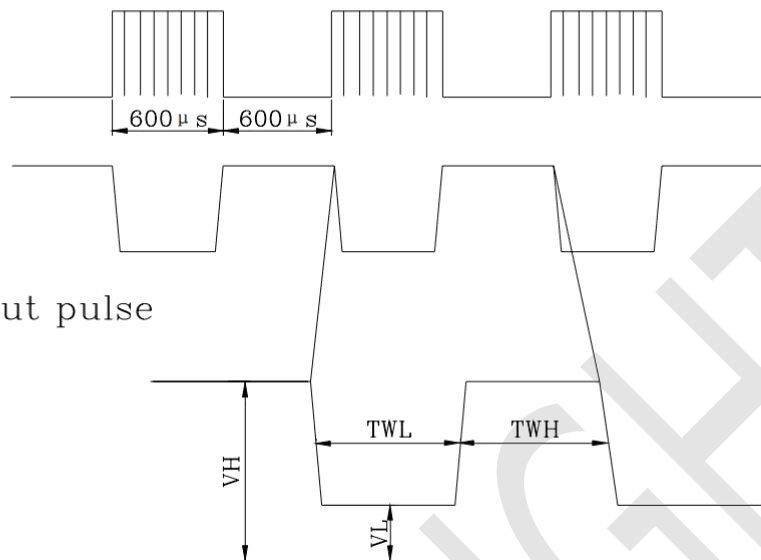

remocon output pulse

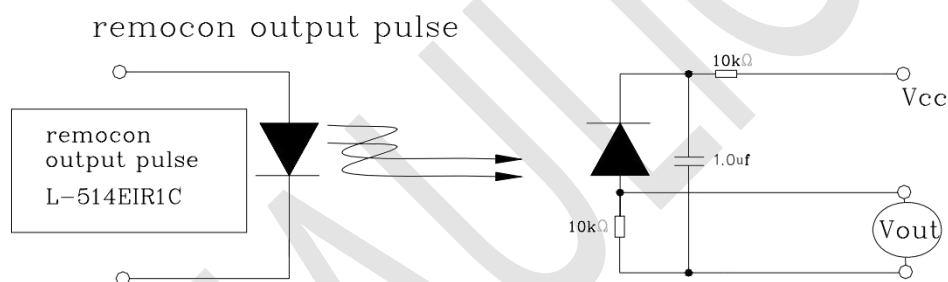

Test Condition of Arrival Distance

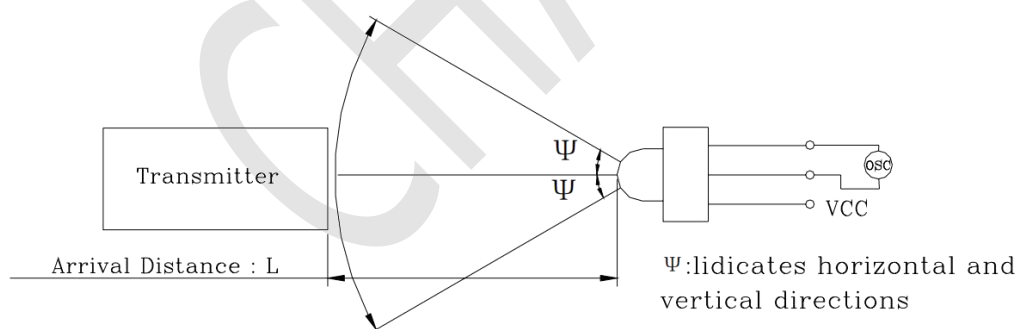

代码信息 Code information

DATA FORMAT	SUITABLE	NOT RECOMMENDED
NEC	@	
RC5	@	
TOSHIBA MICOM CODE	@	
SHARP CODE	@	
GRUNDIG CODE	@	
SONY 12BIT CODE	@	
SONY 15BIT CODE	@	
SONY 20BIT CODE		@
RCA CODE		@
RCMM CODE		@
MATSUSHITA CODE	@	
MITSUBISHI CODE	@	
ZENITH CODE	@	
JVC CODE	@	
M50560-001P	@	
MN6125H	@	
MN6125L	@	
MN6014_C5D7	@	
MN6014_C6D6	@	
MC14457P	@	
LC7464(AHEA)	@	
GEMINI_CM	@	

NOTE: @:BEST FOR APPLICATION

DATA SIGNAL LIMITATION


Minimum Burst Length	300us
----------------------	-------

Minimum Gap Time Between The Bursts	300us
Minimum Data Pause Time Between The Data Commands	20ms

典型光电特性曲线图 Typical Electro-Optical Characteristics Curves


不同电压与静态电流关系

Relation between different voltages and static current

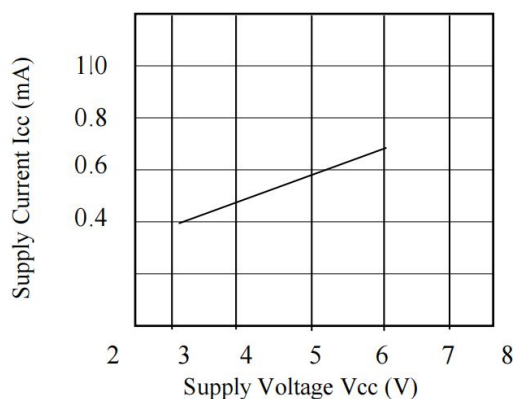


输入脉冲宽度与距离

Input pulse width and distance

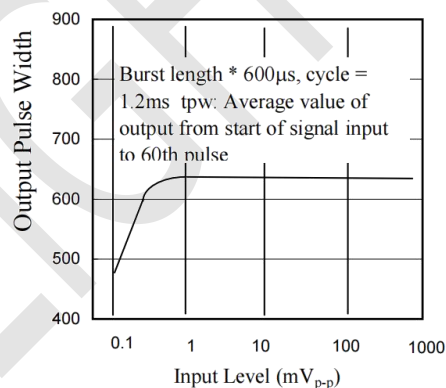


频率相关性响应性

FREQUENCY DEPENDENCE OF RESPONSIVITY

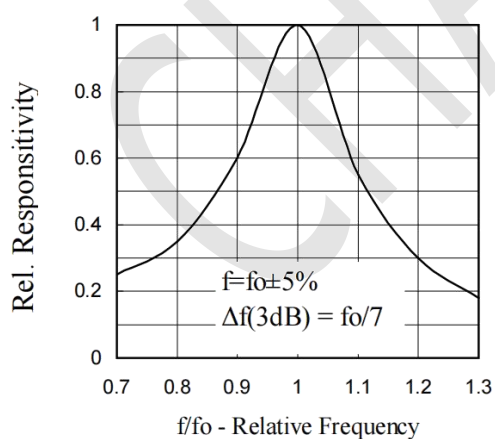

波长曲线图

Spectral Distribution

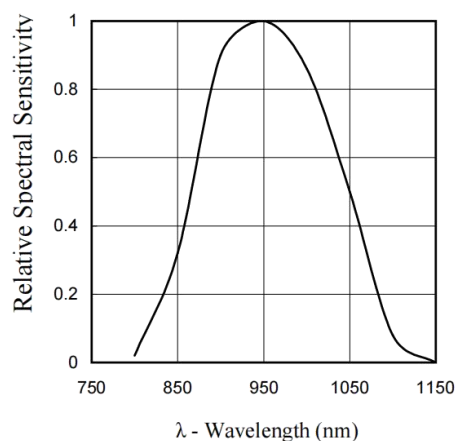

可靠性 Reliability

测试项目 Test item	测试条件 Test condition	适用 Standard
高温 High temperature	Ta=+80℃ t=48H	Note 2
寿命测试 Life Test	V _{CC} =5V t=500H	Note 2
低温 Low temperature	Ta=-30℃ t=48H	Note 2
温度循环 Temperature cycle	-35℃(0.5H)~+85℃(0.5H) 20cycle	Note 2
跌落 Dropping	Test devices shall be dropped 3 times naturally onto hard wooden board from a 75cm height position.	Note 2
焊接能力测试 Soldering ability test	Ta=260℃ t=5s	Note 3

NOTE 1. Distance between emitter & detector specifies maximum distance that output wave form satisfies the standard under the conditions below against the standard transmitter .

- 1)Measuring place : Indoor without extreme reflection of light .
- 2)Ambient light source: Detecting surface illumination shall be 200±50Lux under ordinary hite fluorescense lamp of no high frequency lighting.
- 3)Standard transmitter: burst wave indicated in Fig1.of standard transmitter shall be arranged to 50mVp-p under the measuring circuit specified in Fig2.

NOTE 2. (electro-optical characteristics) shall be satisfied after leaving 1 hours in the normal temperature .

NOTE 3. (electro-optical characteristics) shall be satisfied and 90% or more of the solder area is covered with solder.

Inspection standard

- 1.Among electrical characteristics , total number shall be inspected on items blow.
 - 1-1 front distance between emitter & detector
 - 1-2 Current consumption
 - 1-3 H level output voltage
 - 1-4 L level output voltage
- 2.Items except above mentioned are not inspected particularly , but shall fully satisfy

CAUTION (When use and storage of this device)

- 1.Store and use where there is no force causing transformation or change in quality .
- 2.Store and use where there is no corrosive gas or sea(salt) breeze .
- 3.Store and use where there is no extreme humidity .
- 4.Solder the lead-pin within the condition of ratings. After soldering do not add extra force .
- 5.Do not wash this device . Wipe the stains of diode side with a soft cloth. You can use the solvent , ethylalcohol or methylalcohol or isupropylene only .
- 6.To prevent static electricity damage to the Pre-AMP make sure that the human body, the soldering iron is connected to ground before using .
- 7.Put decoupling device between Vcc and GND for reduse the noise from power supply line .
- 8.The performance of remote-control system depends on environments condition and ability of periferal parts. Customer should evaluate the performance as total system in those conditions

after system up with components such as commander , micon and this receiver module .

Others

- 1.This device is not design to endure radiative rays and heavily charged particles .
- 2.In case where any trouble or questions arise,both parties agress to make full discussion covering the said problem .

更改记录表 Engineering Change Notice-Record

版本 Edition	更改日期 Date	主要更改内容 Main Content	拟 制 Prepared	确 认 Checked
A/0	2020-08-14	新版本发布 New Edition	谢育国	郝三强