

# ESD5Z3V3/ESD5Z5V0/ESD5Z7V0

## ESD5Z3V3/ESD5Z5V0/ESD5Z7V0 Transient Voltage Suppressors ESD Protection Diode

### General description

Silicon Diode in a SOD-523 Plastic Package.

### FEATURES

- Stand-off Voltage: 3.3V/5.0V/7.0V
- Low Leakage Current
- Response Time is Typically < 1ns
- IEC61000-4-2 Level 4 ESD Protection
- RoHS Compliant
- Green EMC
- Matte Tin(Sn) Lead Finish
- Band Indicates Cathode


### Green Product



SOD-523 Flat Lead

### Absolute Maximum Ratings (T<sub>A</sub> = 25°C unless otherwise noted)


Symbol	Parameter	Value	Units
PD	Total Power Dissipation on FR-5 Board	150	mW
T <sub>L</sub>	Max Lead Solder Temperature range (10 Second Duration)	260	°C
T <sub>stg</sub>	Storage Temperature Range	-55 to +150	°C
T <sub>J</sub>	Junction Temperature	+150	°C
ESD	IEC61000-4-2 Air Discharge	±30	KV
	Contact Discharge	±30	KV
ESD	Per Human Body Model	16	KV
	Per Machine Model	400	V

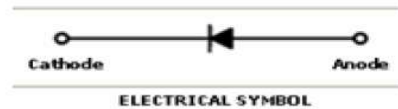

### Device Marking:

Device Type	Marking
ESD5Z3V3	ZE
ESD5Z5V0	ZF
ESD5Z7V0	ZH

Symbol	Parameter
V <sub>C</sub>	Clamping Voltage @ I <sub>PP</sub>
I <sub>PP</sub>	Peak Pulse Current
V <sub>BR</sub>	Breakdown Voltage @ I <sub>T</sub>
I <sub>T</sub>	Test Current
I <sub>R</sub>	Reverse Leakage Current @ V <sub>RWM</sub>
V <sub>RWM</sub>	Reverse Standoff Voltage
V <sub>F</sub>	Forward Voltage @ I <sub>F</sub>
I <sub>F</sub>	Forward Current

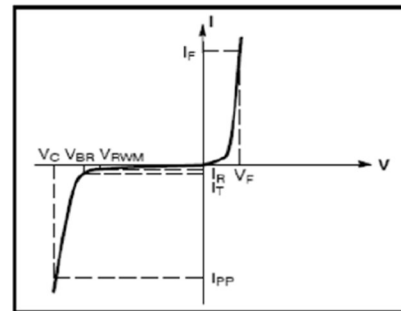

V-I characteristics for a uni-directional TVS

### Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Device Type	V <sub>RWM</sub> (Volts)	I <sub>R</sub> @ V <sub>RWM</sub> (µA)	V <sub>BR</sub> @ I <sub>T</sub> (Note 1) (Volts)	I <sub>T</sub> (mA)	V <sub>C</sub> @ I <sub>PP+</sub> = 5A (Volts)	I <sub>PP+</sub> (A)	V <sub>C</sub> @ Max I <sub>PP+</sub> (Volts)	P <sub>PK+</sub> (W)	C @ V <sub>R</sub> = 0V, f = 1MHz (pF)
	Max	Max	Min		Typ.	Max	Max	Max	
ESD5Z3V3	3.3	1	5.0	1.0	8.4	11.2	14.1	158	105
ESD5Z5V0	5.0	1	6.2	1.0	11.6	9.4	18.6	174	80
ESD5Z7V0	7.0	1	7.5	1.0	13.5	8.8	22.7	200	65

\* Surge current waveform per Figure 1.

Note 1: V<sub>BR</sub> is measured with a pulse test current I<sub>T</sub> at an ambient temperature of 25°C.

## SURGE CURRENT WAVEFORM:


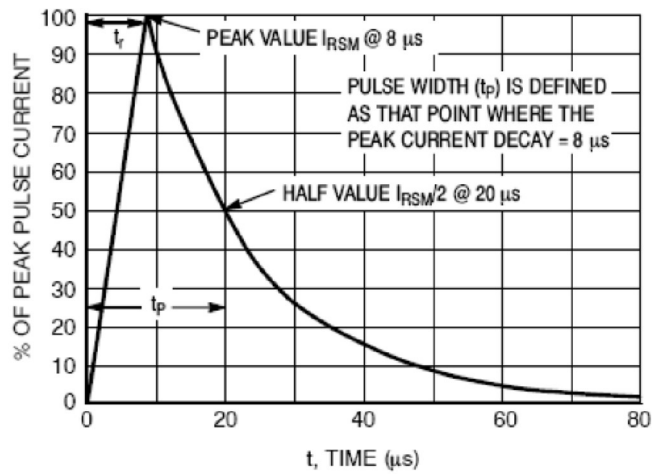


Figure 1. 8 x 20 µs Pulse Waveform

## Flat Lead SOD-523 Package Outline

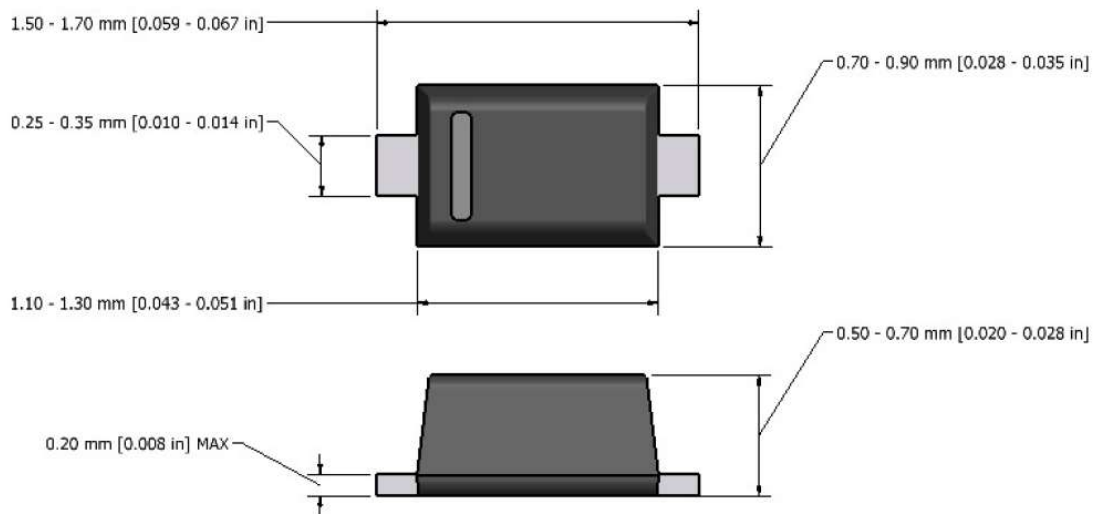

Note: Dimensions are exclusive of Burrs, Mold Flash & Tie Bar extrusions.

## **Important Notice and Disclaimer**

DOESHARE has used reasonable care in preparing the information included in this document, but DOESHARE does not warrant that such information is error free. DOESHARE assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.

DOESHARE no warranty, representation or guarantee regarding the documents, circuits and products specification, DOESHARE reservation rights to make changes for any documents, products, circuits and specifications at any time without notice.

Purchasers are solely responsible for the choice, selection and use of the DOESHARE products and services described herein, and DOESHARE assumes no liability whatsoever relating to the choice, selection or use of the products and services described herein.

No license, express or implied, by implication or otherwise under any intellectual property rights of DOESHARE.

Resale of DOESHARE products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by DOESHARE for the DOESHARE product or service described herein and shall not create or extend in any manner whatsoever, any liability of DOESHARE.