

Main purposes:

The role of regulator and protection for a variety of appliances, electronic equipment, regulator circuit

Maximum Ratings

Parameter	Symbol	Value	Unit
Input Voltage	V_{IN}	36	V
Output Current	I_{OUT}	500	mA
Total Power Dissipation	P_D	1.5	W
Junction Temperature	T_J	0~+150	°C
Storage Temperature	T_{STG}	-55~+150	°C


Pin Configuration(TO-252)

Pin NO.	Pin Name	Function
1	VIN	Input voltage pin
2	GND	GND pin
3	VOUT	Output voltage pin

TO-252



Test schematic diagram

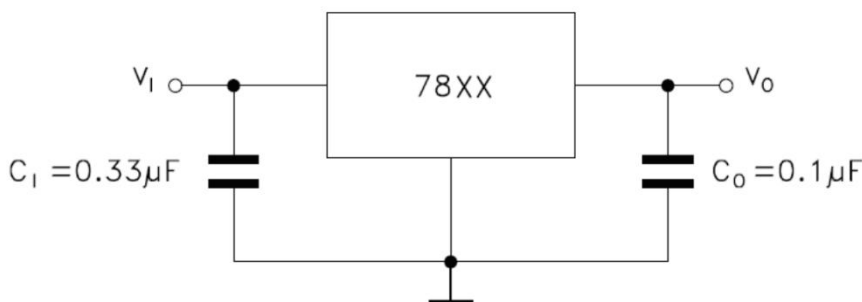

78M05 Electrical Characteristics($T_A=25^{\circ}\text{C}$, unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Max	Unit
Output voltage	V_{OUT}	$V_{IN}=10\text{V}, I_{OUT}=250\text{mA}$	4.8	5.2	V
Line regulation	ΔV_{OUT}	$V_{IN}=7\text{V}\sim 11\text{V}, I_{OUT}=250\text{mA}$	-25	25	mV
Load regulation	ΔV_{OUT}	$V_{IN}=10\text{V}, I_{OUT}=5\text{mA}\sim 250\text{mA}$	-40	40	mV
Load regulation		$V_{IN}=10\text{V}, I_{OUT}=5\text{mA}\sim 500\text{mA}$	-80	80	mV
Quiescent Current	I_Q	$V_{IN}=10\text{V}, I_{OUT}=5\text{mA}$	1	5	mA
Quiescent Current	ΔI_Q	$V_{IN}=7\text{V}, I_{OUT}=5\sim 250\text{mA}$	-0.4	0.4	mA
Quiescent Current		$V_{IN}=7\text{V}\sim 26\text{V}, I_{OUT}=50\text{mA}$	-0.7	0.7	mA
Supply Current	I_{CC}	$V_{IN}=36\text{V}, I_{OUT}=0\text{mA}$		9	mA

78M12 Electrical Characteristics ($T_A=25^\circ\text{C}$, unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Max	Unit
Output voltage	V_{OUT}	$V_{IN}=19\text{V}, I_{OUT}=250\text{mA}$	11.52	12.48	V
Line regulation	ΔV_{OUT}	$V_{IN}=16\text{V}\sim 20\text{V}, I_{OUT}=250\text{mA}$	-25	25	mV
Load regulation	ΔV_{OUT}	$V_{IN}=19\text{V}, I_{OUT}=5\text{mA}\sim 250\text{mA}$	-40	40	mV
Load regulation		$V_{IN}=19\text{V}, I_{OUT}=5\text{mA}\sim 500\text{mA}$	-80	80	mV
Quiescent Current	I_Q	$V_{IN}=19\text{V}, I_{OUT}=5\text{mA}$	1	5	mA
Quiescent Current	ΔI_Q	$V_{IN}=16\text{V}, I_{OUT}=5\sim 250\text{mA}$	-0.4	0.4	mA
Quiescent Current		$V_{IN}=16\text{V}\sim 26\text{V}, I_{OUT}=50\text{mA}$	-0.7	0.7	mA
Supply Current	I_{CC}	$V_{IN}=36\text{V}, I_{OUT}=0\text{mA}$		9	mA

Typical Characteristics


Dropout voltage vs junction temp.

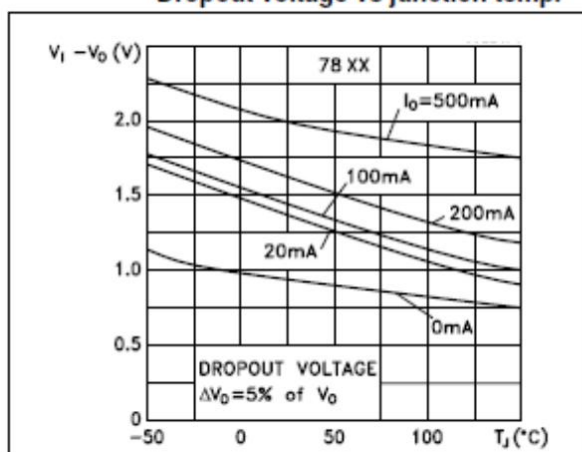


Dropout characteristics

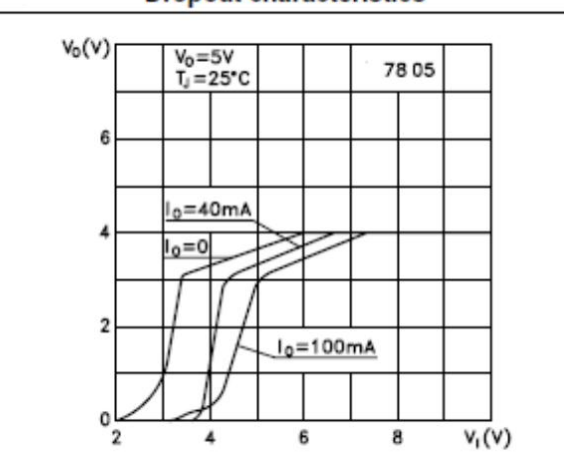


Peak output current vs input-output differential voltage

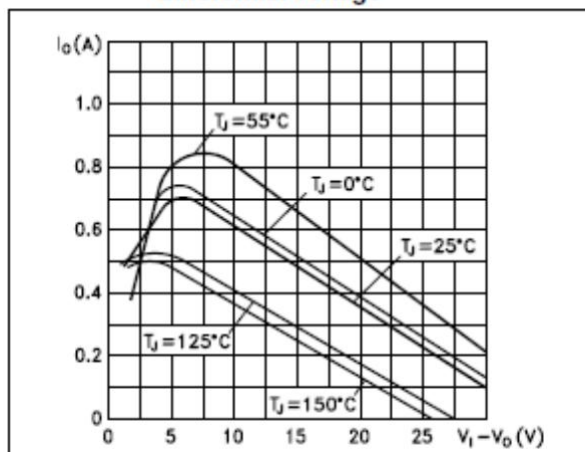


Output voltage vs junction temperature

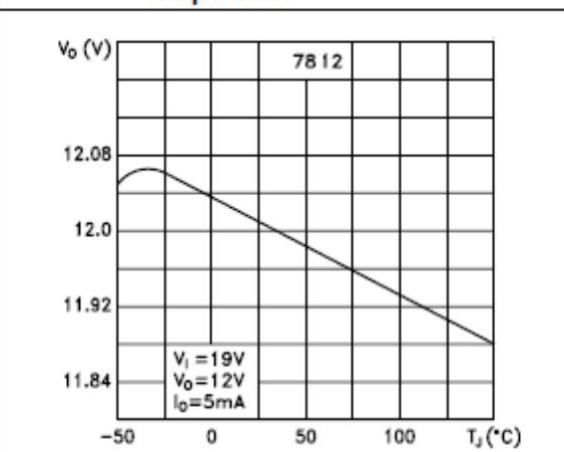


Supply voltage rejection vs freq.

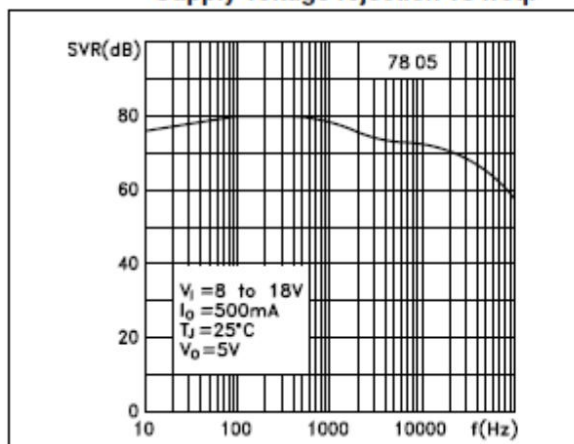


Quiescent current vs junction temp.

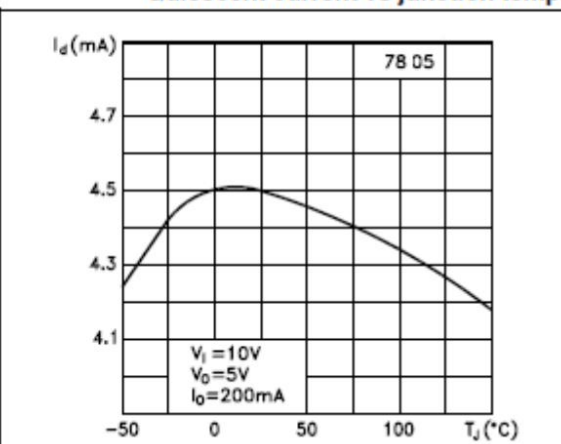


Load transient response

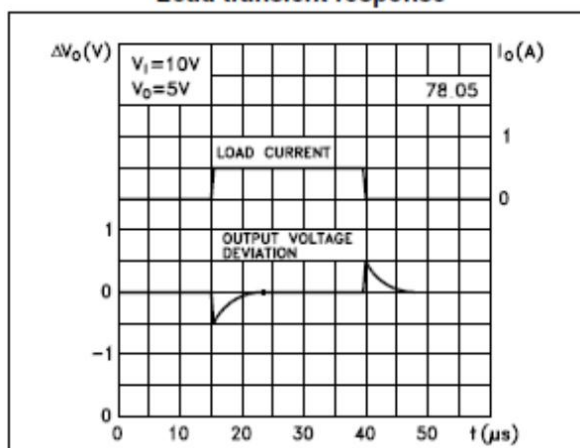

Line transient response

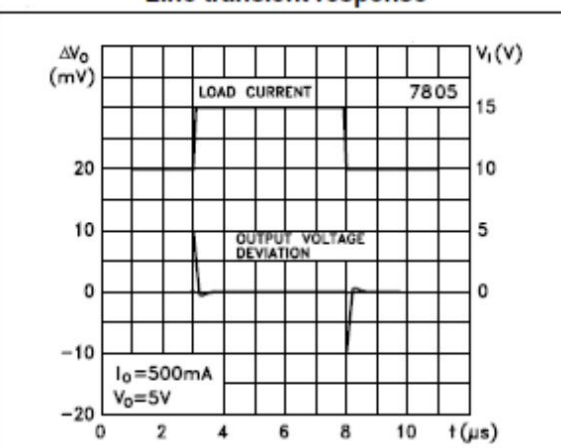


Quiescent current vs input voltage

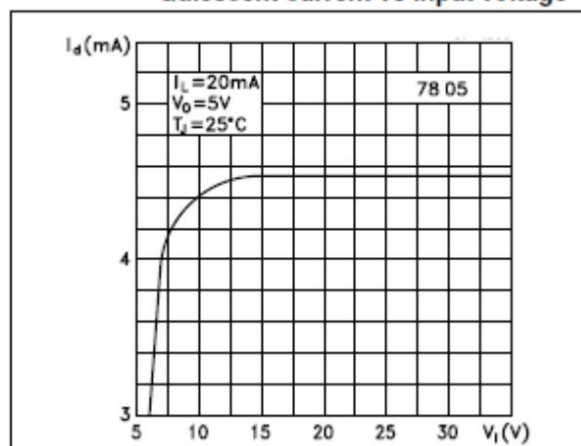

Package Information

TO-252

Dimensions in mm

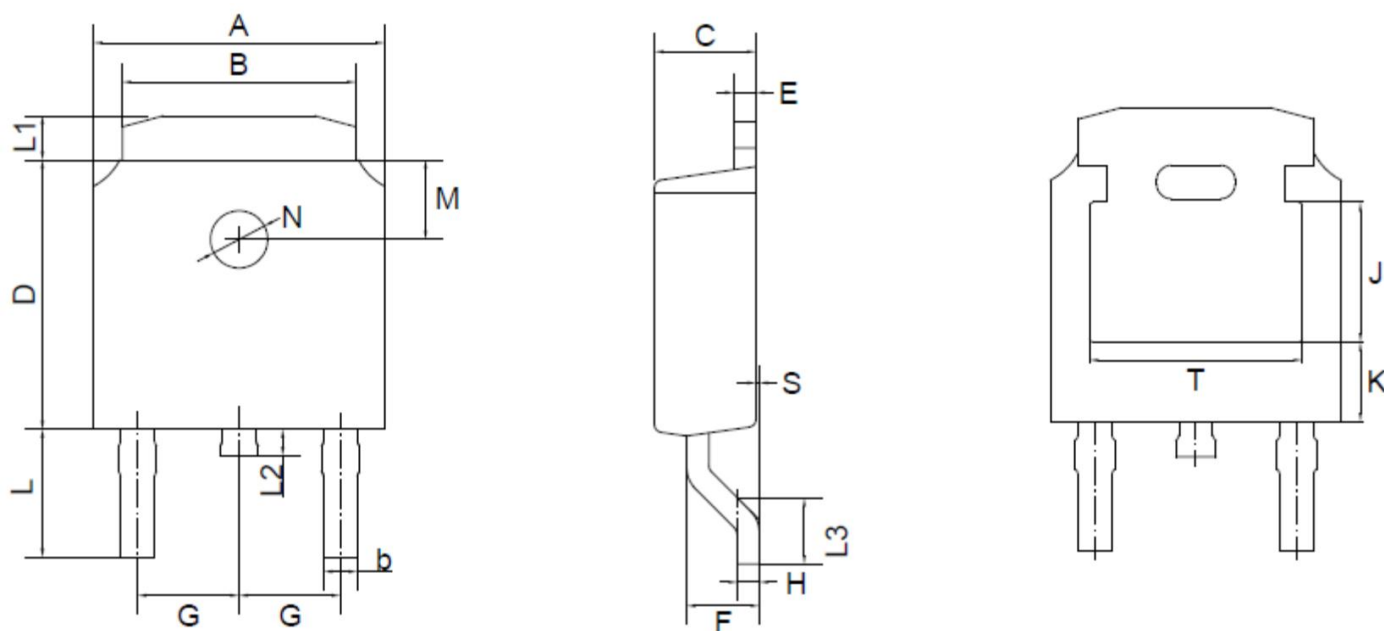

TO-252(D-PAK) mechanical data

UNIT		A	B	b	C	D	E	F	G	H	L	L1	L2	L3	S	M	N	J	K	T
mm	max	6.7	5.5	0.8	2.5	6.3	0.6	1.8	2.29	0.55	3.1	1.2	1.0	1.75	0.1	1.8	1.3	3.16	1.80	4.83
	min	6.3	5.1	0.3	2.1	5.9	0.4	1.3	TYPICAL	0.45	2.7	0.8	0.6	1.40	0.0	TYPICAL	TYPICAL	ref.	ref.	ref.
mil	max	264	217	31	98	248	24	71	90	22	122	47	39	69	4	71	51	124	71	190
	min	248	201	12	83	232	16	51	TYPICAL	18	106	31	24	55	0	TYPICAL	TYPICAL	ref.	ref.	ref.

Shikues Disclaimer

1.Accuracy of Information and Right to Modify

The information provided in this document is for reference only. Shikues reserves the right to make changes to this document and to the specifications of the products described herein at any time, without prior notice, for the purpose of improving reliability, function, design, or for any other reason. It is the customer's responsibility to obtain and verify the latest product information and specifications before making any final design, procurement, or usage decisions.

2.No Warranty

Shikues makes no express or implied warranties, representations, or guarantees regarding the suitability of its products for any particular purpose.

Shikues assumes no liability for any assistance provided or for the design of customer products. All products are supplied "as is."

3.Intended Use and Limitation of Liability

The products described in this document are intended for use in general-purpose electronic devices. They are neither designed nor tested nor authorized for use in transportation equipment or applications requiring high reliability. Unless expressly authorized in writing by Shikues, these products must not be used as critical components in life-support systems or any applications where failure could directly pose a risk to human life (including, but not limited to, medical devices, transportation systems, aerospace equipment, nuclear facilities, and safety-critical systems).

Shikues assumes no responsibility or liability for any consequences arising from the use of its products in unauthorized or unintended applications.

Neither Shikues nor its representatives shall be held liable for any resulting damages.

4.Intellectual Property

This document does not grant any express or implied license—whether by estoppel, implication, or otherwise—to use any intellectual property rights of Shikues.