

Single Buffer/Driver with 3-state Output

CJ74LVC1G240 Logic

1 Introduction

The CJ74LVC1G240 is a single line driver with a 3-state output.

The input can be driven from either 3.3V or 5V devices. This feature allows the use of this device in a mixed 3.3V and 5V environment.

2 Available Packages

PART NUMBER	PACKAGE
CJ74LVC1G240	SOT-23-5L
	SOT-353
	DFN1.45x1-6L


Note: For all available packages, please refer to the part Orderable Information.

3 Features

- Wide supply voltage range from 1.65V to 5.5V
- Inputs accept voltages to 5.5 V
- $\pm 24\text{mA}$ output drive at 3.0V
- High-impedance when $V_{CC}=0\text{V}$
- Temperature range: -40°C to $+125^{\circ}\text{C}$

4 Applications

- AV Receiver
- Audio Dock: Portable
- Blu-ray Player and Home Theater
- Embedded PC
- Personal Digital Assistant (PDA)
- Power: Telecom/Server AC/DC Supply: Single Controller: Analog and Digital
- Solid State Driver(SSD): Client and Enterprise
- Wireless Headset, Keyboard, and Mouse

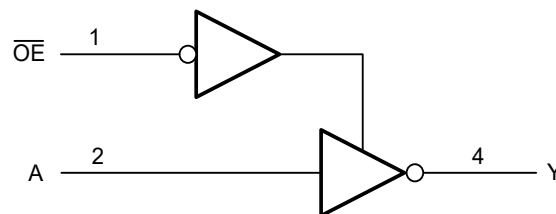

Logic diagram

5 Orderable Information

DEVICE	PACKAGE	OP TEMP	ECO PLAN	MSL	PACKING OPTION	SORT
CJ74LVC1G240M5N	SOT-23-5L	-40~125°C	RoHS & Green	Level 3 168HR	Tape and Reel 3000 Units / Reel	Active
CJ74LVC1G240R5N	SOT-353	-40~125°C	RoHS & Green	Level 3 168HR	Tape and Reel 3000 Units / Reel	Active
CJ74LVC1G240DNN	DFN1.45x1-6L	-40~125°C	RoHS & Green	Level 3 168HR	Tape and Reel 5000 Units / Reel	Active

Note:

ECO PLAN: For the RoHS and Green certification standards of this product, please refer to the official report provided by JSCJ.

MSL: Moisture Sensitivity Level. Determined according to JEDEC industry standard classification.

SORT: Specifically defined as follows:

Active: Recommended for new products;

Customized: Products manufactured to meet the specific needs of customers;

Preview: The device has been released and has not been fully mass produced. The sample may or may not be available;

NoRD: It is not recommended to use the device for new design. The device is only produced for the needs of existing customers;

Obsolete: The device has been discontinued.

6 Pin Configuration and Marking Information

6.1 Pin Configuration

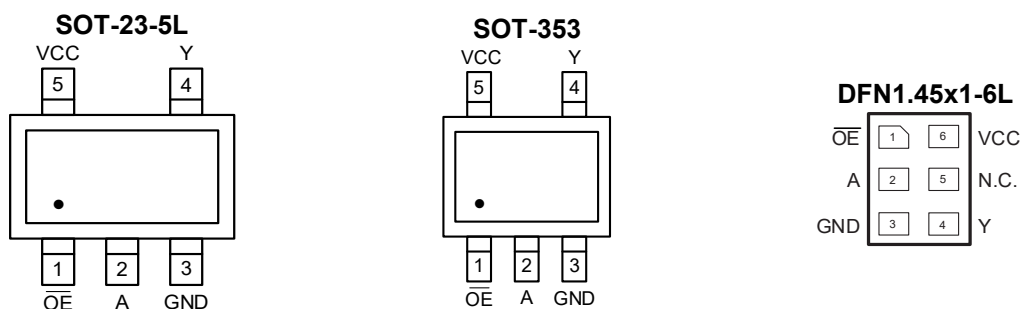



Figure 6-1 Pin configuration

6.2 Pin Function

PIN			I/O ⁽¹⁾	DESCRIPTION
No.		NAME		
SOT-23-5L/SOT-353	DFN1.45x1-6L			
1	1	OE	I	Enable input
2	2	A	I	Data input
3	3	GND	G	Ground (0V)
4	4	Y	O	Data output
-	5	N.C.	-	Not connected
5	6	VCC	P	Supply voltage

(1) I-Input, O-Output, P-Power, G-Ground

6.3 Marking Information

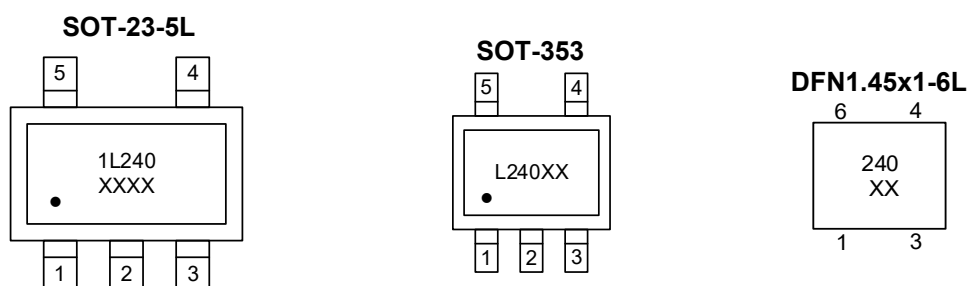

XXXX or XX: Code, indicates weekly record information.

7 Specifications

7.1 Absolute Maximum Ratings

Voltages are referenced to GND (ground=0V), unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CC}	Supply voltage	-	-0.5	+6.5	V
V_I	Input voltage	-	-0.5	+6.5	V
V_O	Output voltage	Active mode	-0.5	$V_{CC}+0.5$	V
		Power-down mode; $V_{CC}=0V$	-0.5	+6.5	V
		Output 3-state	-0.5	+6.5	V
I_{CC}	Supply current	-	-	100	mA
I_{GND}	Ground current	-	-100	-	mA
I_{IK}	Input clamping current	$V_I < 0V$	-50	-	mA
I_O	Output current	$V_O=0V$ to V_{CC}	-	± 50	mA
I_{OK}	Output clamping current	$V_O > V_{CC}$ or $V_O < 0V$	-	± 50	mA
T_{stg}	Storage temperature	-	-65	+150	°C
T_L	Soldering temperature	10s	-	260	°C

Note: Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to GND. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

7.2 Recommended Operating Conditions

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{CC}	Supply voltage	-	1.65	-	5.5	V
V_I	Input voltage	-	0	-	5.5	V
V_O	Output voltage	Active mode	0	-	V_{CC}	V
		Power-down mode; $V_{CC}=0V$	0	-	5.5	V
		Output 3-state	0	-	5.5	V
T_{amb}	Ambient temperature	-	-40	-	+125	°C

7.3 ESD Ratings

SYMBOL	ESD RATINGS		VALUE	UNIT
$V_{ESD-HBM}$	Electrostatic discharge	Human body model (HBM) ⁽¹⁾	± 4000	V

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

7.4 Electrical Characteristics

7.4.1 DC Characteristics 1

$T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS		MIN.	TYP. ⁽¹⁾	MAX.	UNIT
V _{IH}	HIGH-level input voltage	V _{CC} =1.65V to 1.95V		0.65xV _{CC}	-	-	V
		V _{CC} =2.3V to 2.7V		1.7	-	-	V
		V _{CC} =2.7V to 3.6V		2.0	-	-	V
		V _{CC} =4.5V to 5.5V		0.7xV _{CC}	-	-	V
V _{IL}	LOW-level input voltage	V _{CC} =1.65V to 1.95V		-	-	0.35xV _{CC}	V
		V _{CC} =2.3V to 2.7V		-	-	0.7	V
		V _{CC} =2.7V to 3.6V		-	-	0.8	V
		V _{CC} =4.5V to 5.5V		-	-	0.3xV _{CC}	V
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL}	I _O =-100uA; V _{CC} =1.65V to 5.5V	V _{CC} -0.1	-	-	V
			I _O =-4mA; V _{CC} =1.65V	1.2	1.54	-	V
			I _O =-8mA; V _{CC} =2.3V	1.9	2.15	-	V
			I _O =-12mA; V _{CC} =2.7V	2.2	2.50	-	V
			I _O =-24mA; V _{CC} =3.0V	2.3	2.62	-	V
			I _O =-32mA; V _{CC} =4.5V	3.8	4.11	-	V
V _{OL}	LOW-level output voltage	V _I = V _{IH} or V _{IL}	I _O =100uA; V _{CC} =1.65V to 5.5V	-	-	0.10	V
			I _O =4mA; V _{CC} =1.65V	-	0.07	0.45	V
			I _O =8mA; V _{CC} =2.3V	-	0.12	0.30	V
			I _O =12mA; V _{CC} =2.7V	-	0.17	0.40	V
			I _O =24mA; V _{CC} =3.0V	-	0.33	0.55	V
			I _O =32mA; V _{CC} =4.5V	-	0.39	0.55	V
I _I	Input leakage current	V _I =5.5V or GND; V _{CC} =0V to 5.5V		-	-	±1	uA
I _{OZ}	OFF-state output current	V _I =V _{IH} or V _{IL} ; V _O =5.5V or GND; V _{CC} =3.6V		-	-	±2	uA
I _{OFF}	Power-off leakage current	V _I or V _O =5.5V; V _{CC} =0V		-	-	±2	uA
I _{CC}	Supply current	V _I =5.5V or GND; I _O =0A; V _{CC} =1.65V to 5.5V		-	-	4	uA
ΔI _{CC}	Additional supply current	V _I =V _{CC} -0.6V; I _O =0A; V _{CC} =2.3V to 5.5V		-	-	500	uA

(1) Typical values are measured at $T_{amb}=25^{\circ}\text{C}$.

7.4.2 DC Characteristics 2

$T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS		MIN.	TYP.	MAX.	UNIT
V _{IH}	HIGH-level input voltage	V _{CC} =1.65V to 1.95V		0.65xV _{CC}	-	-	V
		V _{CC} =2.3V to 2.7V		1.7	-	-	V
		V _{CC} =2.7V to 3.6V		2.0	-	-	V
		V _{CC} =4.5V to 5.5V		0.7xV _{CC}	-	-	V
V _{IL}	LOW-level input voltage	V _{CC} =1.65V to 1.95V		-	-	0.35xV _{CC}	V
		V _{CC} =2.3V to 2.7V		-	-	0.7	V
		V _{CC} =2.7V to 3.6V		-	-	0.8	V
		V _{CC} =4.5V to 5.5V		-	-	0.3xV _{CC}	V
V _{OH}	HIGH-level output voltage	V _I = V _{IH} or V _{IL}	I _O =-100uA; V _{CC} =1.65V to 5.5V	V _{CC} -0.1	-	-	V
			I _O =-4mA; V _{CC} =1.65V	0.95	-	-	V
			I _O =-8mA; V _{CC} =2.3V	1.7	-	-	V
			I _O =-12mA; V _{CC} =2.7V	1.9	-	-	V
			I _O =-24mA; V _{CC} =3.0V	2.0	-	-	V
			I _O =-32mA; V _{CC} =4.5V	3.4	-	-	V
V _{OL}	LOW-level output voltage	V _I = V _{IH} or V _{IL}	I _O =100uA; V _{CC} =1.65V to 5.5V	-	-	0.10	V
			I _O =4mA; V _{CC} =1.65V	-	-	0.70	V
			I _O =8mA; V _{CC} =2.3V	-	-	0.45	V
			I _O =12mA; V _{CC} =2.7V	-	-	0.60	V
			I _O =24mA; V _{CC} =3.0V	-	-	0.80	V
			I _O =32mA; V _{CC} =4.5V	-	-	0.80	V
I _I	Input leakage current	V _I =5.5V or GND; V _{CC} =0V to 5.5V		-	-	±1	uA
I _{OZ}	OFF-state output current	V _I =V _{IH} or V _{IL} ; V _O =5.5V or GND; V _{CC} =3.6V		-	-	±2	uA
I _{OFF}	Power-off leakage current	V _I or V _O =5.5V; V _{CC} =0V		-	-	±2	uA
I _{CC}	Supply current	V _I =5.5V or GND; I _O =0A; V _{CC} =1.65V to 5.5V		-	-	4	uA
ΔI _{CC}	Additional supply current	V _I =V _{CC} -0.6V; I _O =0A; V _{CC} =2.3V to 5.5V		-	-	500	uA

7.4.3 AC Characteristics 1

$T_{amb} = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS		MIN.	TYP. ⁽¹⁾	MAX.	UNIT
t _{PLH} , t _{PHL}	A to Y propagation delay	See Figure 8-3	V _{CC} =1.65V to 1.95V	3	-	8.6	ns
			V _{CC} =2.3V to 2.7V	1.4	-	5.5	ns
			V _{CC} =3.0V to 3.6V	1.1	-	4.5	ns
			V _{CC} =4.5V to 5.5V	1	-	4	ns
t _{PZH} , t _{PZL}	OE to A/B enable time	See Figure 8-4	V _{CC} =1.65V to 1.95V	3.8	-	10	ns
			V _{CC} =2.3V to 2.7V	2.1	-	6.5	ns
			V _{CC} =3.0V to 3.6V	1.4	-	5.4	ns
			V _{CC} =4.5V to 5.5V	1.1	-	5.2	ns
t _{PLZ} , t _{PHZ}	OE to A/B disable time	See Figure 8-4	V _{CC} =1.65V to 1.95V	2.1	-	9.4	ns
			V _{CC} =2.3V to 2.7V	1	-	4.9	ns
			V _{CC} =3.0V to 3.6V	1.4	-	5.2	ns
			V _{CC} =4.5V to 5.5V	1	-	4.1	ns

(1) Typical values are measured at $T_{amb}=25^{\circ}\text{C}$ and $V_{CC}=1.8\text{V}$, 2.5V , 2.7V , 3.3V and 5.0V respectively.

7.4.4 AC Characteristics 2

$T_{amb} = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, voltages are referenced to GND (ground=0V), unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS		MIN.	TYP. ⁽¹⁾	MAX.	UNIT
t _{PLH} , t _{PHL}	A to Y propagation delay	See Figure 8-3	V _{CC} =1.65V to 1.95V	-	-	9.6	ns
			V _{CC} =2.3V to 2.7V	-	-	5.7	ns
			V _{CC} =3.0V to 3.6V	-	-	4.7	ns
			V _{CC} =4.5V to 5.5V	-	-	4.2	ns
t _{PZH} , t _{PZL}	OE to A/B enable time	See Figure 8-4	V _{CC} =1.65V to 1.95V	-	-	10.2	ns
			V _{CC} =2.3V to 2.7V	-	-	6.7	ns
			V _{CC} =3.0V to 3.6V	-	-	5.6	ns
			V _{CC} =4.5V to 5.5V	-	-	5.4	ns
t _{PLZ} , t _{PHZ}	OE to A/B disable time	See Figure 8-4	V _{CC} =1.65V to 1.95V	-	-	9.6	ns
			V _{CC} =2.3V to 2.7V	-	-	5.1	ns
			V _{CC} =3.0V to 3.6V	-	-	5.4	ns
			V _{CC} =4.5V to 5.5V	-	-	4.3	ns

8 Detailed Description

8.1 Overview

The CJ74LVC1G240 is a single line driver with a 3-state output.

The input can be driven from either 3.3V or 5V devices. This feature allows the use of this device in a mixed 3.3V and 5V environment.

8.2 Functional Block Diagram

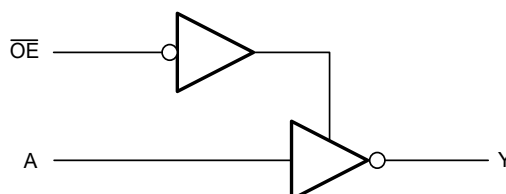


Figure 8-1 Logic diagram

8.3 Function Table⁽¹⁾

INPUT		OUTPUT
$\overline{\text{OE}}$	A	Y
L	H	L
L	L	H
H	X	Z

(1) H=HIGH voltage level; L=LOW voltage level.

8.4 Testing Circuit

8.4.1 AC Testing Circuit

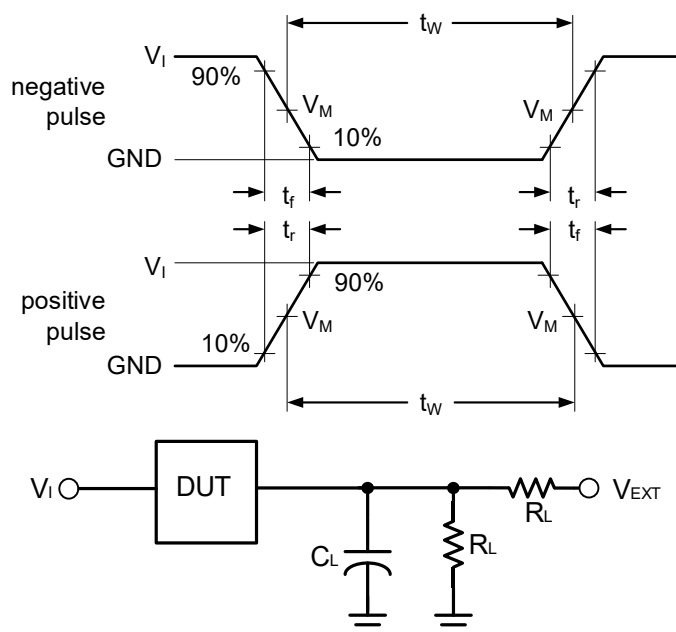


Figure 8-2 Load circuit

Definitions for test circuit:

C_L includes probe and jig capacitance.

R_L =Load resistance.

8.4.2 AC Testing Waveforms

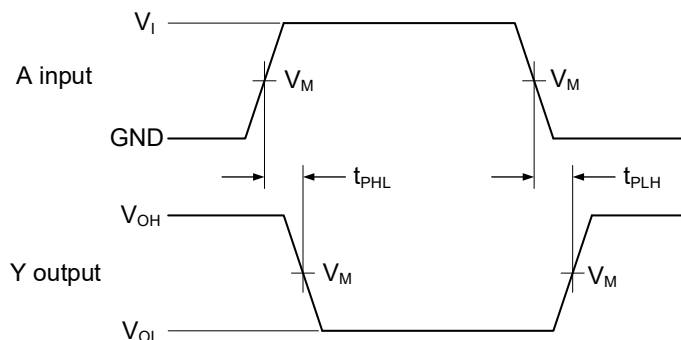


Figure 8-3 The data input (A) to output (Y) propagation delays

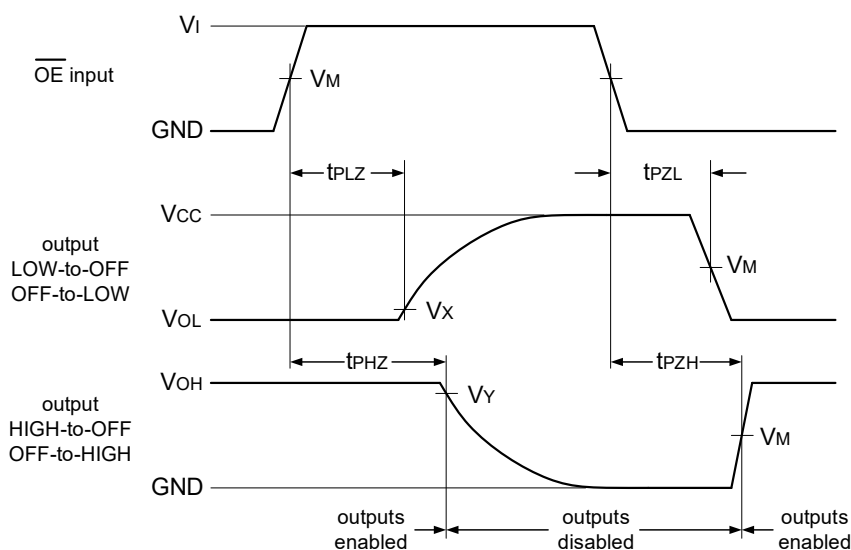


Figure 8-4 3-state enable and disable times

8.4.3 Measurement Points

SUPPLY VOLTAGE	INPUT	OUTPUT		
V_{CC}	V_M	V_M	V_X	V_Y
1.65V to 1.95V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
2.3V to 2.7V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
3.0V to 3.6V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$
4.5V to 5.5V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$


8.4.4 Test Data

SUPPLY VOLTAGE	INPUT		LOAD		V_{EXT}		
V_{CC}	V_I	$t_r = t_f$	C_L	R_L	t_{PLH}/t_{PHL}	t_{PLZ}/t_{PZL}	t_{PHZ}/t_{PZH}
1.65V to 1.95V	V_{CC}	$\leq 3ns$	30pF	1k Ω	Open	$2 \times V_{CC}$	GND
2.3V to 2.7V	V_{CC}	$\leq 3ns$	30pF	500 Ω	Open	$2 \times V_{CC}$	GND
2.7V	V_{CC}	$\leq 3ns$	50pF	500 Ω	Open	$2 \times V_{CC}$	GND
3.0V to 3.6V	V_{CC}	$\leq 3ns$	50pF	500 Ω	Open	$2 \times V_{CC}$	GND
4.5V to 5.5V	V_{CC}	$\leq 3ns$	50pF	500 Ω	Open	$2 \times V_{CC}$	GND

9 Mechanical Information

9.1 SOT-23-5L Mechanical Information


9.1.1 SOT-23-5L Outline Dimensions

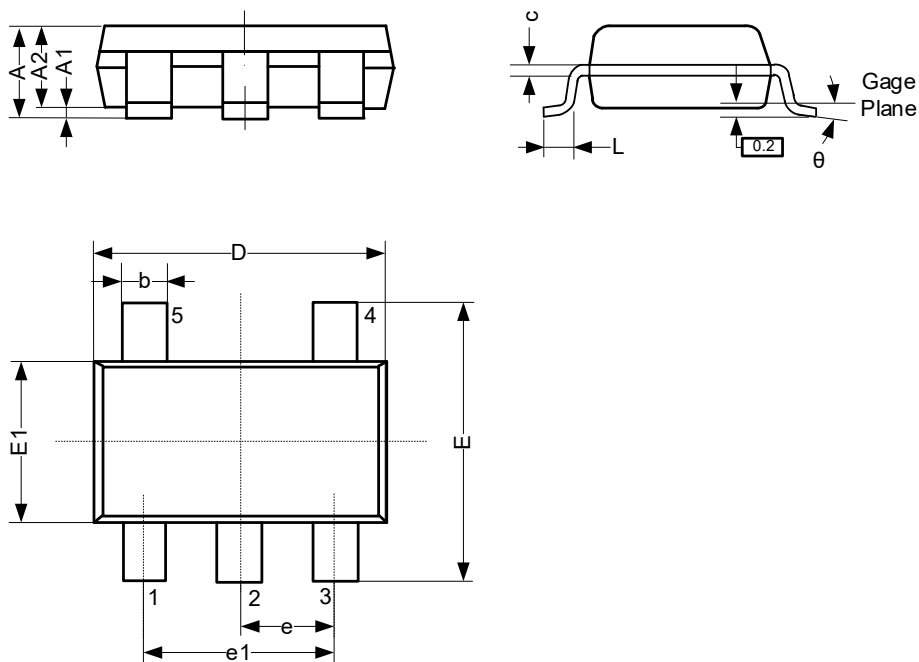

SYMBOL	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	-	-	1.26
A1	0.00	-	0.12
A2	1.00	-	1.20
b	0.30	-	0.50
c	0.10	-	0.20
D	2.82	-	3.02
E	2.60	-	3.00
E1	1.50	-	1.70
e	0.95 BSC		
e1	1.80	-	2.00
L	0.30	-	0.60
θ	0°	-	8°
Unit: mm			

9.2 SOT-353 Mechanical Information


9.2.1 SOT-353 Outline Dimensions

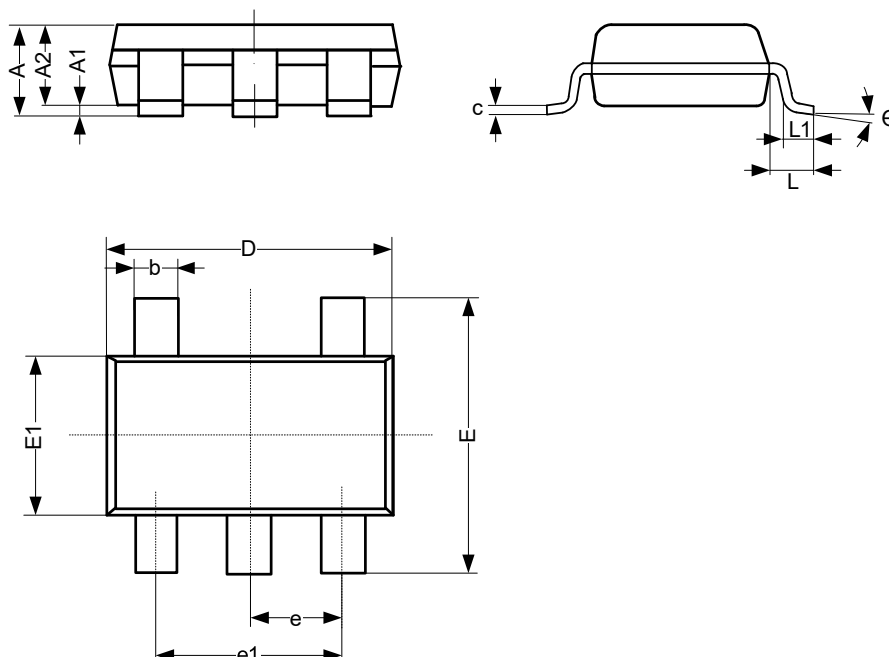

SYMBOL	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.90	-	1.10
A1	0.00	-	0.10
A2	0.90	-	1.00
b	0.15	-	0.35
c	0.11	-	0.175
D	2.00	-	2.20
E	2.15	-	2.45
E1	1.15	-	1.35
e	0.65 BSC		
e1	1.20	-	1.40
L	-	0.525	-
L1	0.26	-	0.46
θ	0°	-	8°
Unit: mm			

9.3 DFN1.45x1-6L Mechanical Information

9.3.1 DFN1.45x1-6L Outline Dimensions

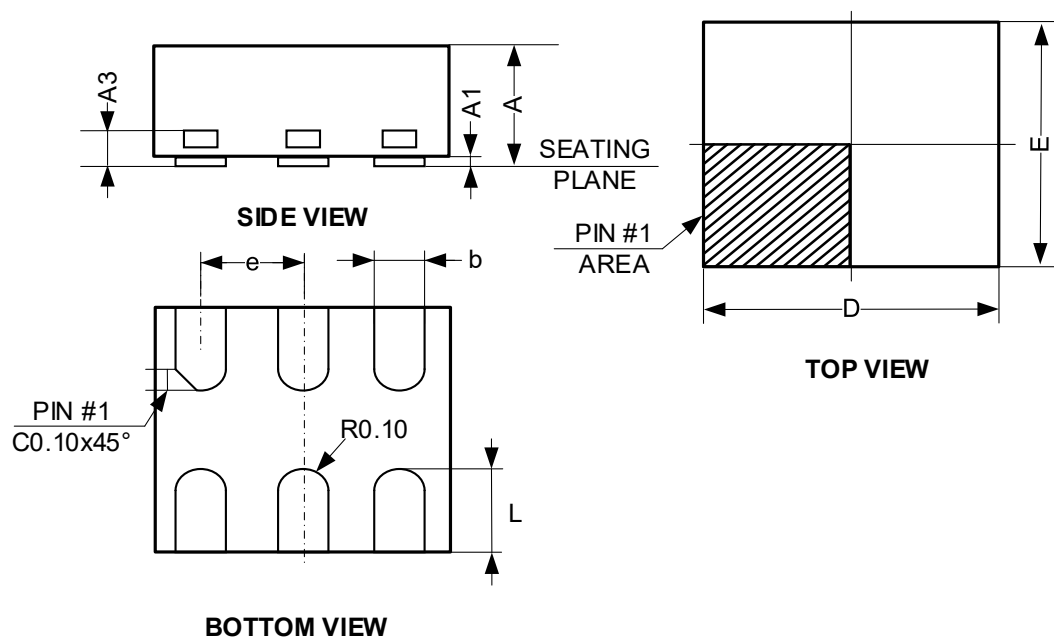

SYMBOL	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.51	-	0.60
A1	0.00	-	0.05
A3	-	0.15	-
b	0.15	-	0.25
D	-	1.45	-
E	-	1.00	-
e	0.50 BSC		
L	0.25	-	0.45
Unit: mm			

10 Notes and Revision History

10.1 Associated Product Family and Others

To view other products of the same type or IC products of other types, click the official website of JSCJ -- <https://www.jscj-elec.com> for more details.

10.2 Notes

Electrostatic Discharge Caution



This IC may be damaged by ESD. Relevant personnel shall comply with correct installation and use specifications to avoid ESD damage to the IC. If appropriate measures are not taken to prevent ESD damage, the hazards caused by ESD include but are not limited to degradation of integrated circuit performance or complete damage of integrated circuit. For some precision integrated circuits, a very small parameter change may cause the whole device to be inconsistent with its published specifications.

10.3 Revision History

July, 2025: rev - 1.2, Change marking information.

DISCLAIMER

IMPORTANT NOTICE, PLEASE READ CAREFULLY

The information in this data sheet is intended to describe the operation and characteristics of our products. JSCJ has the right to make any modification, enhancement, improvement, correction or other changes to any content in this data sheet, including but not limited to specification parameters, circuit design and application information, without prior notice.

Any person who purchases or uses JSCJ products for design shall: 1. Select products suitable for circuit application and design; 2. Design, verify and test the rationality of circuit design; 3. Procedures to ensure that the design complies with relevant laws and regulations and the requirements of such laws and regulations. JSCJ makes no warranty or representation as to the accuracy or completeness of the information contained in this data sheet and assumes no responsibility for the application or use of any of the products described in this data sheet.

Without the written consent of JSCJ, this product shall not be used in occasions requiring high quality or high reliability, including but not limited to the following occasions: medical equipment, military facilities and aerospace. JSCJ shall not be responsible for casualties or property losses caused by abnormal use or application of this product.

Official Website: www.jscj-elec.com

Copyright © JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD