

L7810

DATASHEET

Specification Revision History:

Version	Date	Description
V1.0	2019/12	New
V1.1	2021/10	Modify Ordering Information
V1.2	2025/02	Modify Ordering Information
V1.3	2025/03	Add application precautions and overall typesetting.

General Description

The L7810 of three-terminal positive regulator are available in the TO 220-3/TO 252-2 package and with several fixed output voltages ,making them useful in a wide range of applications . Each type employs internal current limiting , thermal shut down and safe operating area protection ,making it essentially indestructible .If adequate heat sinking is provided ,they can deliver over 1 . 5 A output current . Although designed primarily as fixed voltage regulators , these devices can be used with external components to obtain adjustable voltage s and currents .


FEATURES

- Output Current up to 1.5A (TO-220-3)
- Thermal Overload Protection
- Short Circuit Protection
- Output Transistor Safe Operating Area Protection
- Output Voltages: 7805: 5V 7806: 6V 7808: 8V
 7809: 9V 7810: 10V 7812: 12V 7815: 15V

The appearance of the product



TO-220-3



TO-252-2




TO-263-2


Ordering Information

Product Model	Package Type	Marking	Packing	Packing Qty
L7810CKT	TO-263-2	L7810 268	REEL	1000PCS/REEL
L7810CAT	TO-220-3	L7810 T268	TUBE	1000PCS/BOX
L78M10AGT	TO-252-2	78M10 S268	REEL	2500PCS/REEL
7810	TO-220-3	L7810 G268	TUBE	1000PCS/BOX
78M10	TO-252-2	78M10 0268	REEL	2500PCS/REEL

2、Pin Configurations

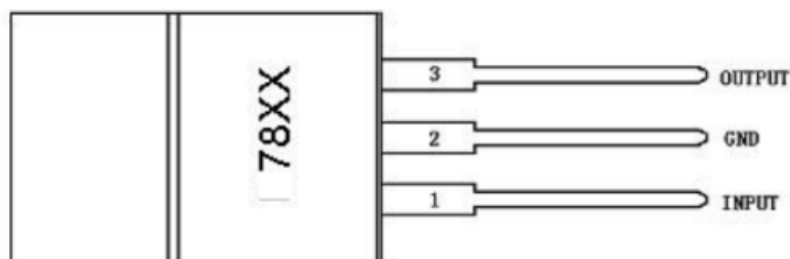


78XX(TO220-3)

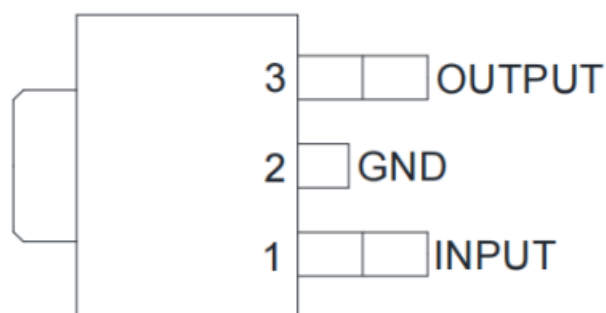

78XX (TO252-2)

Block Diagram

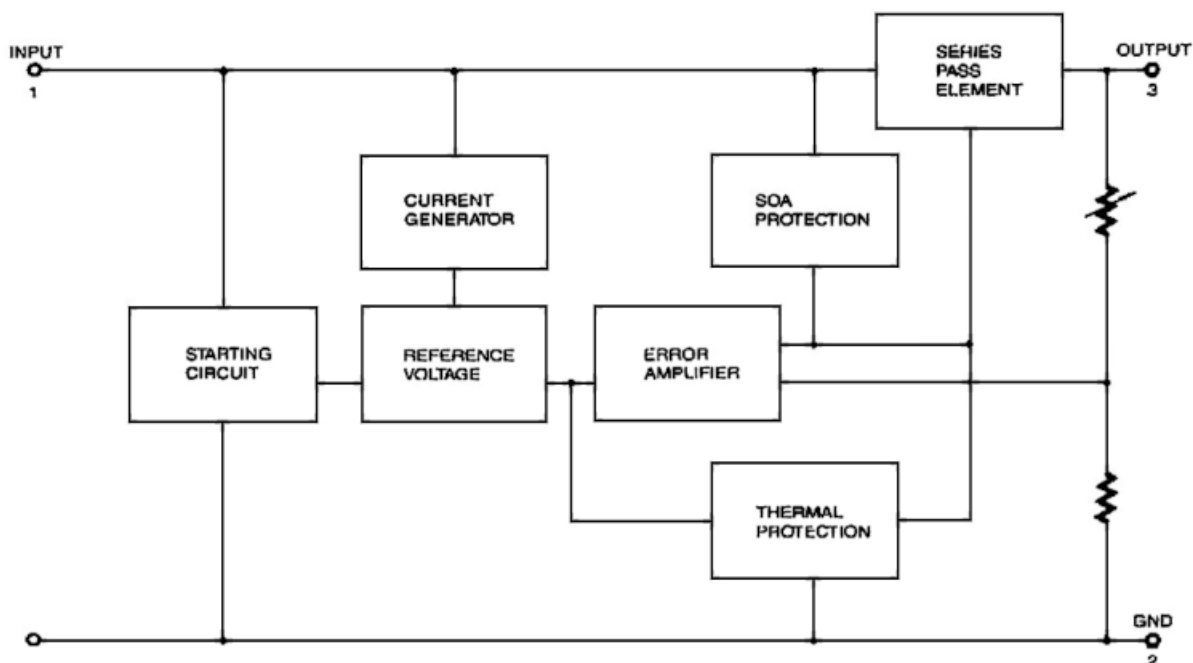

Absolute Maximum Ratings ($T_a=25^{\circ}\text{C}$)

Characteristics	Symbol	Value	Units
Input Voltage	V_i	35	V
Thermal Resistance Junction-Case	$R_{\theta_{JC}}$	(TO-220-3)5	$^{\circ}\text{C/W}$
		(TO-252-2)12	
Thermal Resistance Junction-Air	$R_{\theta_{JA}}$	(TO-220-3)65	$^{\circ}\text{C/W}$
		(TO-252-2)112	
Operating Temperature Range	T_{OPR}	$-40 \sim +125$	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	$-55 \sim +150$	$^{\circ}\text{C}$


L7810 Electrical Characteristics

(Refer to the test circuit , $-40^{\circ}\text{C} < T_J < 125^{\circ}\text{C}$, $I_o=500\text{mA}$, $V_i=17\text{V}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)


Characteristics	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J=+25^{\circ}\text{C}$	9.6	10	10.4	V
		$5.0\text{mA} \leq I_o \leq 1.0\text{A}$, $P_o \leq 15\text{W}$ $V_i=11.5\text{V}$ to 26V	9.5	10	10.5	
Line Regulation *	Regline	$T_J=+25^{\circ}\text{C}$		5.0	150	mV
		$V_i=12.5\text{V}$ to 26V		2.0	80	
Load Regulation *	Regload	$T_J=+25^{\circ}\text{C}$		10	160	mV
		$I_o=5.0\text{mA}$ to 1.5A		5.0	80	
Quiescent Current	I_Q	$T_J=+25^{\circ}\text{C}$		5.0	8.0	mA
Quiescent Current Change	ΔI_Q	$I_o=5.0\text{mA}$ to 1.0A		0.05	0.5	mA
		$V_i=12.5\text{V}$ to 26V		0.5	1.0	
Output Voltage Drift	$\Delta V_o/\Delta T$	$I_o=5.0\text{mA}$		-0.8		mV/ $^{\circ}\text{C}$
Output Noise Voltage	V_N	$f=10\text{Hz}$ to 100KHz , $T_A=+25^{\circ}\text{C}$		52		$\mu\text{V}/V_o$
Ripple Rejection	RR	$f=120\text{Hz}$ $V_i=12.5\text{V}$ to 21.5V	56	73		dB
Dropout Voltage	V_{Drop}	$I_o=1\text{A}$, $T_J=+25^{\circ}\text{C}$		2		V
Short Circuit Current	I_{SC}	$V_i=35\text{V}$, $T_A=+25^{\circ}\text{C}$		230		mA
Peak Current	I_{PK}	$T_J=+25^{\circ}\text{C}$		2.2		A

*Load and line regulation are specified at constant junction temperature .Changes in V_o due to heating effects must be taken into account separately.Pulse testing with low duty is used .


Application Circuit

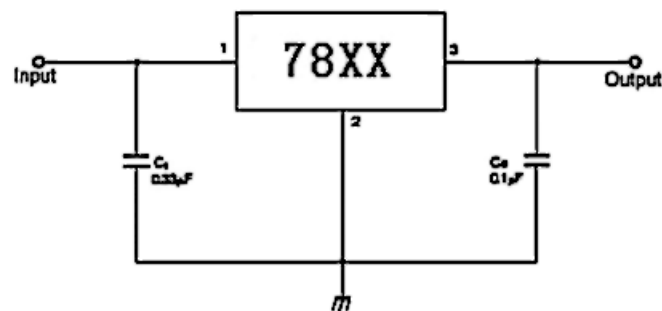


DC Parameters

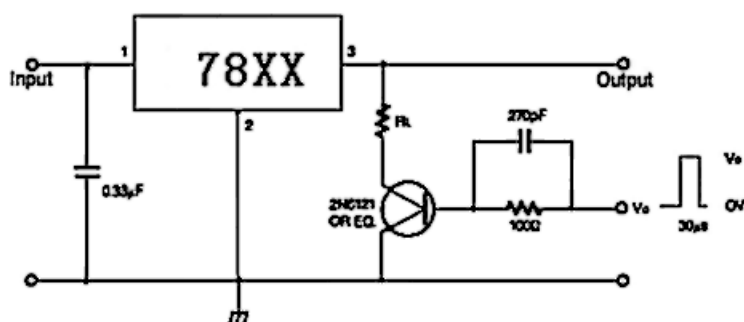


Load Regulation

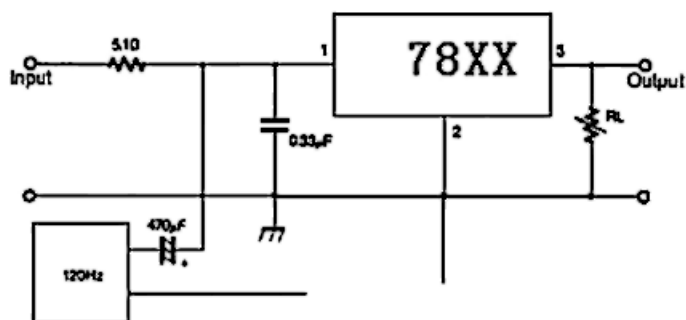

Ripple Rejection

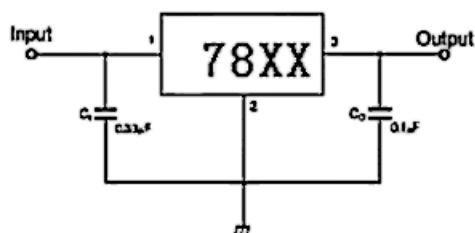


Fixed Output Regulator

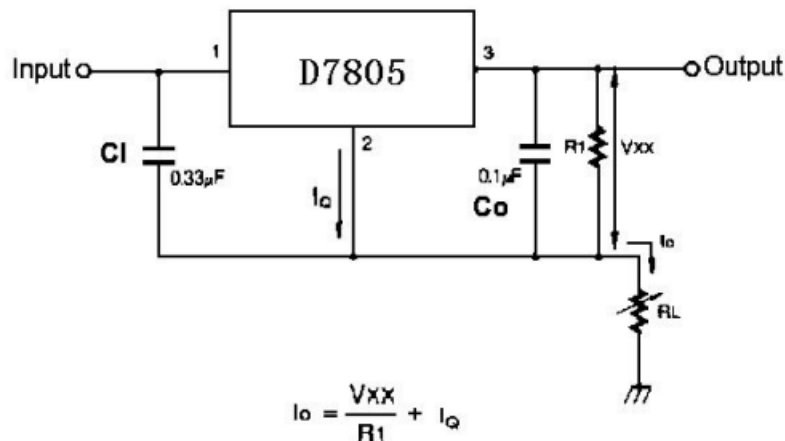


Constant Current Regulator

Notes:


- (1) To specify an output voltage, substitute voltage value for "XX." A common ground is required between the input and the Output voltage. The input voltage must remain typically 2.0V above the output voltage even during the low point on the input ripple voltage.
- (2) Ci is required if regulator is located an appreciable distance from power Supply filter.
- (3) Co improves stability and transient response.

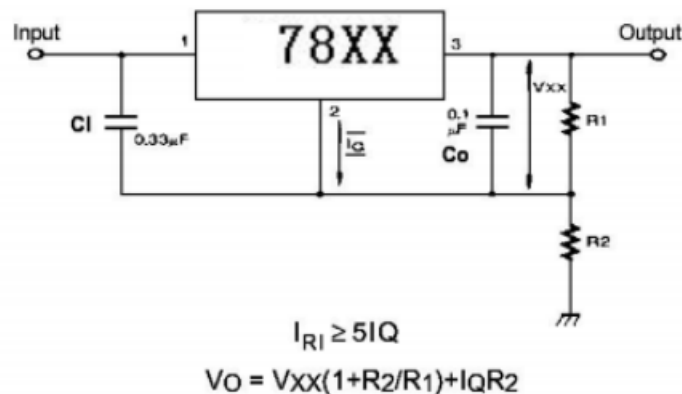


Circuit for Increasing Output Voltage

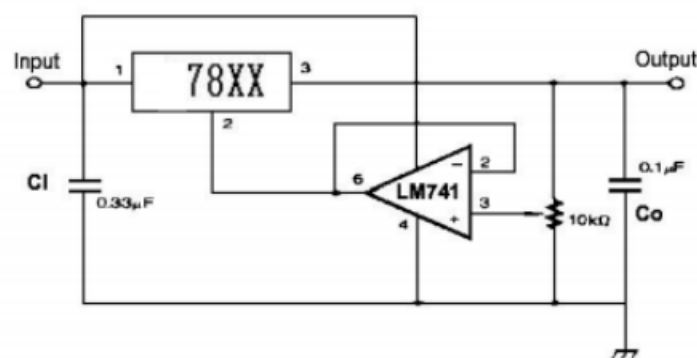


Adjustable Output Regulator (7 to 30V)

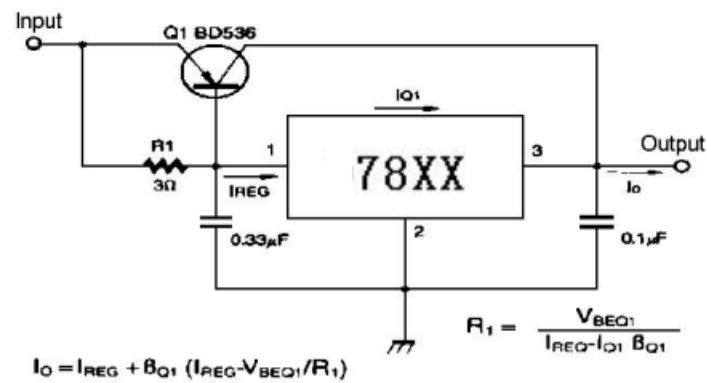


High Current Voltage Regulator

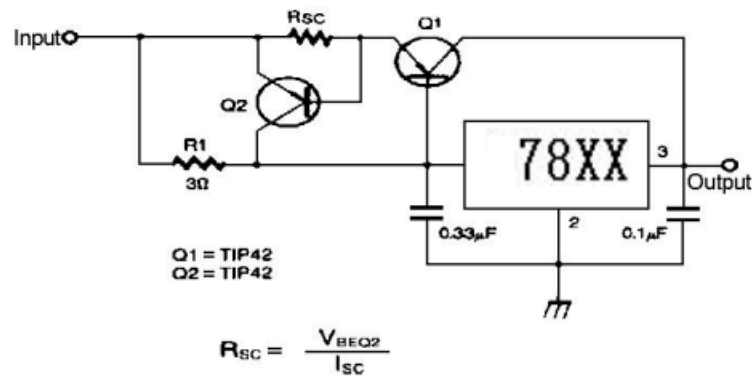


High Output Current with Short Circuit Protection

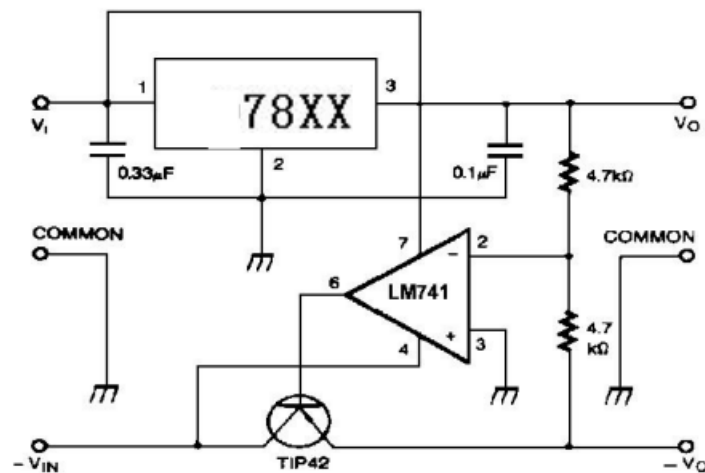

Tracking Voltage Regulator

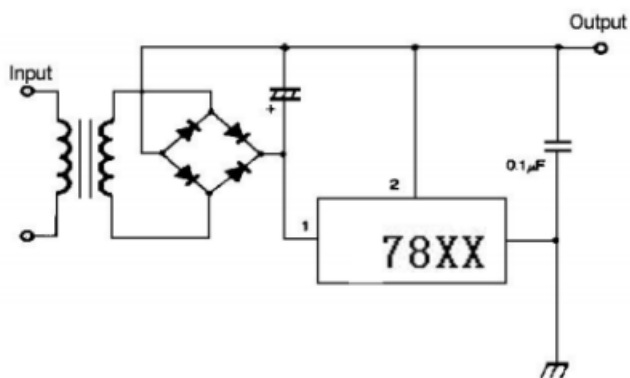


Negative Output Voltage Circuit

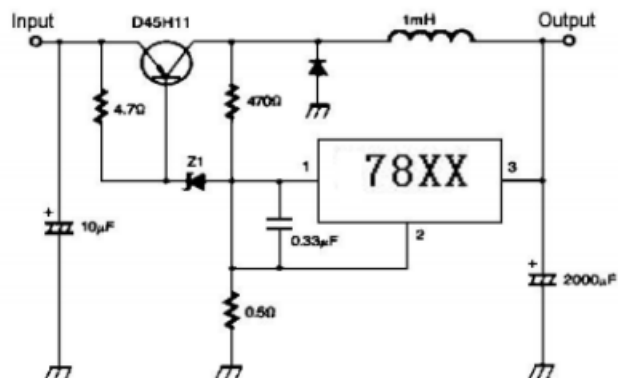


Switching Regulator


Characteristic Curves

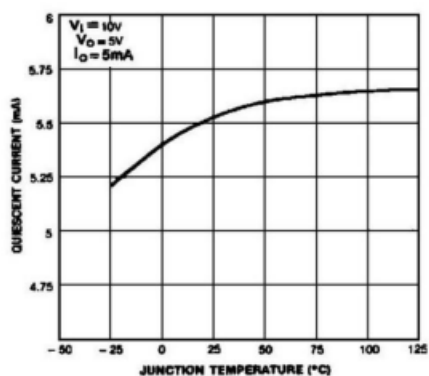


Quiescent Current

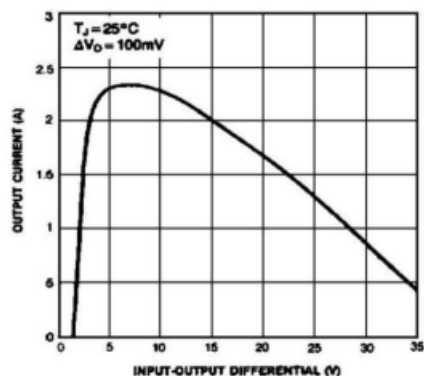

Peak Output Current

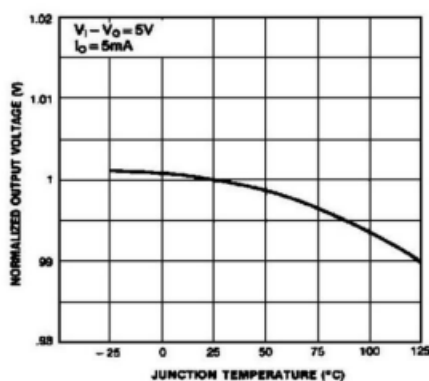


Output Voltage

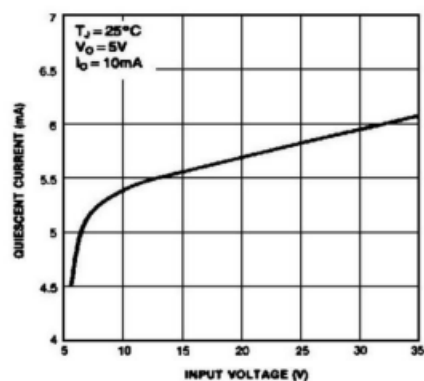


Quiescent Current

Outline Dimensions

TO-220-3

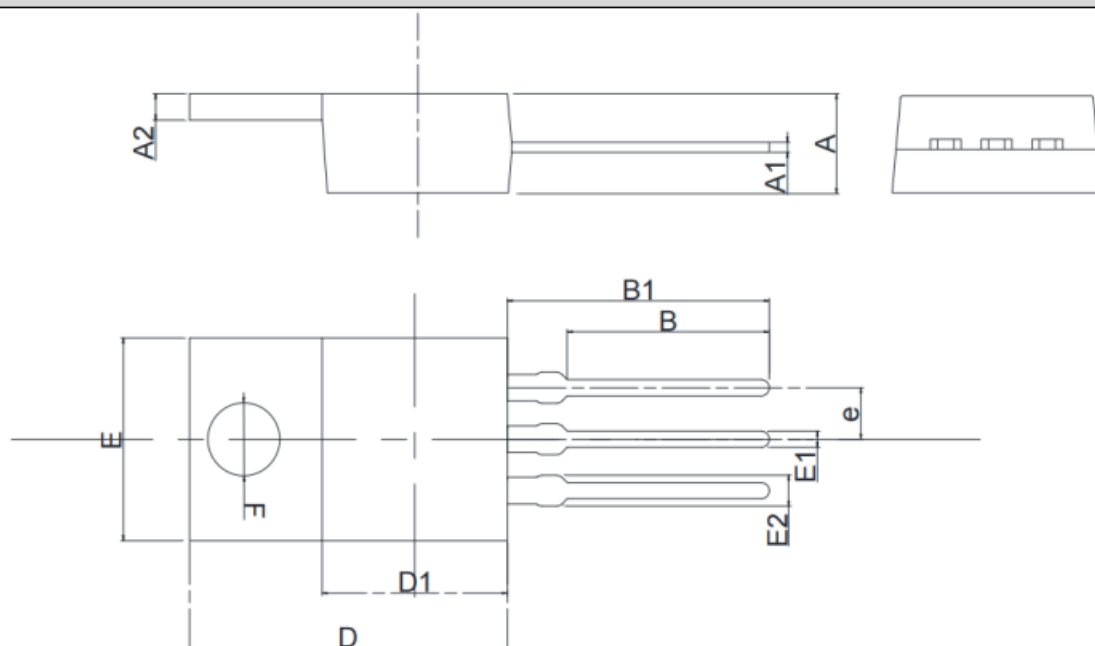

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.300	4.800	0.169	0.189
A1	0.340	0.600	0.013	0.023
A2	1.220	1.400	0.047	0.055
B	9.460	10.380	0.372	0.408
B1	12.880	13.760	0.507	0.541
D	14.410	15.900	0.567	0.626
D1	8.000	9.000	0.314	0.354
E	9.700	10.400	0.381	0.409
E1	0.700	0.900	0.027	0.036
E2	1.220	1.400	0.048	0.055
e	2.540 (BSC)		0.984 (BSC)	
F	Φ3.800	Φ3.900	Φ0.149	Φ0.153

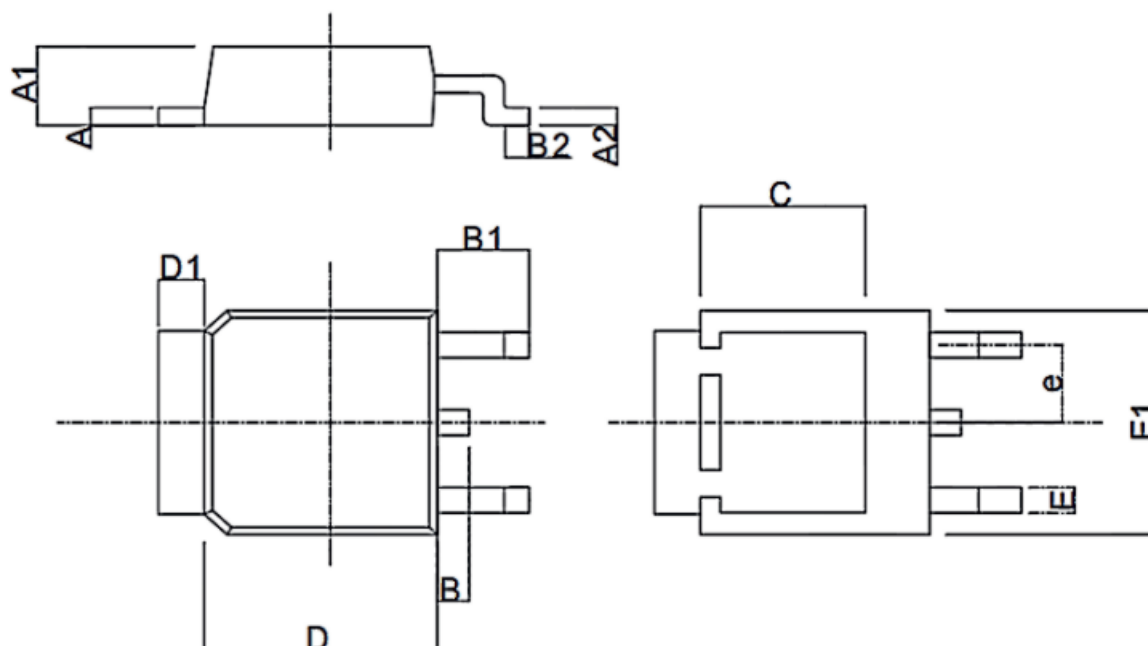TO-252-2


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.470	0.570	0.018	0.023
A1	2.220	2.380	0.087	0.094
A2	0.470	0.570	0.018	0.023
B	0.820	0.840	0.032	0.033
B1	2.380	2.480	0.093	0.098
B2	0.500	0.520	0.019	0.021
C	4.250	4.450	0.167	0.176
D	6.000	6.200	0.236	0.245
D1	1.150	1.250	0.045	0.050
E	0.650	0.850	0.025	0.034
E1	6.450	6.750	0.253	0.266
e	2.285 (BSC)		0.090 (BSC)	

Important Notice

- Green Micro chip reserves the right to change products and documents without notice. Customers should obtain and verify the completeness of the latest technical information before placing orders. Meanwhile, Green Micro chip shall not assume any responsibility or obligation for non-officially revised documents.
- Any parameters in the entire product specification are for reference only, and actual application testing shall prevail. When customers use the products for system design, they must comply with safety regulations and independently assume the following responsibilities: selecting suitable Green Micro chip products according to application requirements; completing design verification and full-link testing of the application; and ensuring that the application complies with safety regulations or other requirements of the target market. Customers shall bear all personal or property losses caused by design defects or illegal operations, which shall have no relation to Green Micro chip.
- Green Micro chip products are prohibited from being used in scenarios such as life support, military equipment, and key aerospace applications. All accidents and legal liabilities arising from out-of-scope use shall be borne by the user, and Green Micro chip shall not be held responsible.
- All technical resources of Green Micro chip (including data sheets and reference designs) are provided "as is", without guarantee of no defects or universality, and without any express or implied warranties. The documents are only authorized for product development and research described in this document. Unauthorized use of intellectual property, public reproduction, and reverse engineering are strictly prohibited. All claims and losses caused by illegal use shall be borne by the user, and Green Micro chip shall not be liable.