


## 1. OVERVIEW

The SMD-04B is a high precision optical encoder ic that employs a diffraction image reflection method. It implements an OEIC (Opto-Electric Integrated Circuit) and LED in a single package. Light emitted from the LED is projected onto a scale, and the reflected diffraction image detected by a photodiode detector is used to determine the relative movement between the SMD-04B and the scale. A Z-phase origin signal can also be output by establishing a pattern for origin detection on the scale. It also features a photodiode detector array to reduce degradation in phase characteristics due to variations in mounting accuracy.


## 2. FEATURES

- Compact, clear molded package (5.3mm×4.3mm×1.0mm)
- 5μm resolution (generated on A and B phases using scale with 20μm pitch pattern)
- Analog output with 20μm cycle (sine wave) and Z-phase digital output
- LED and OEIC fabricated in a single package
- LED brightness setting and automatic brightness adjustment selectable using external pins
- LED brightness auto power control function to reduce variation in analog output signal amplitude
- 4.5 to 5.25V supply voltage
- 22.0mA current consumption

## 3. BLOCK DIAGRAM

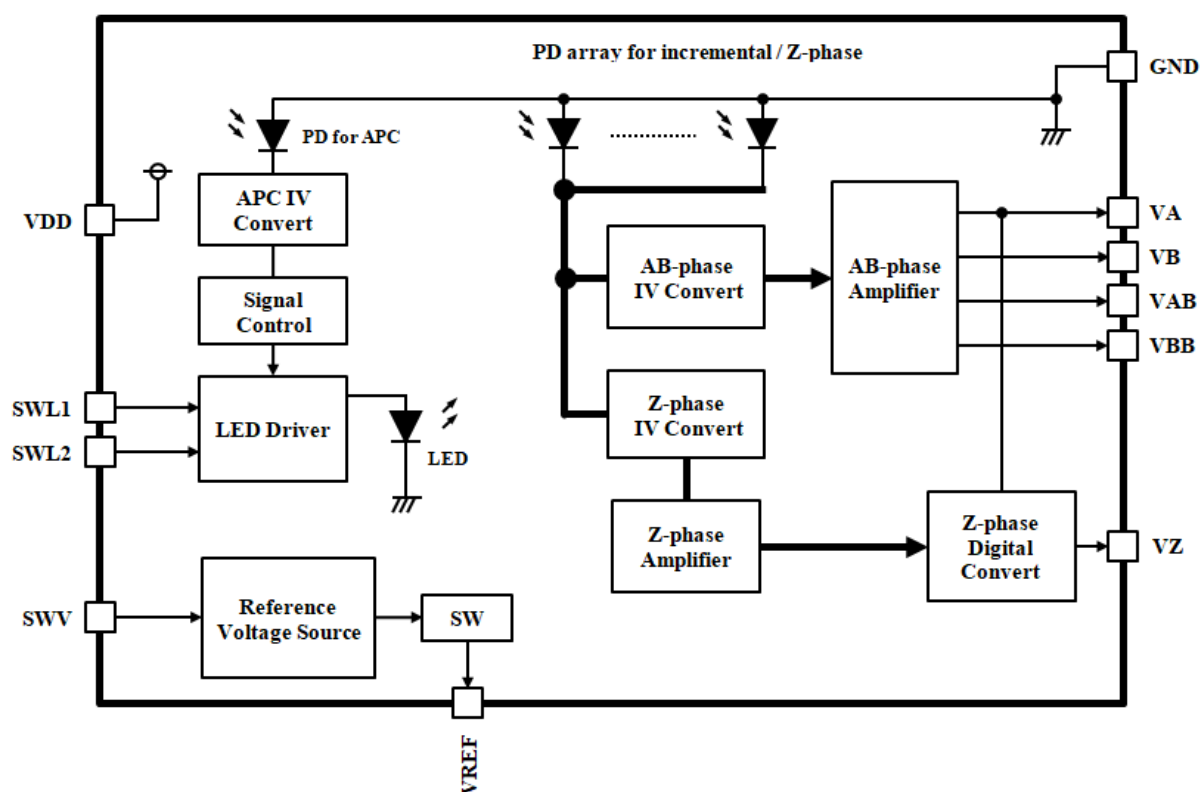

## 4. PIN LAYOUT

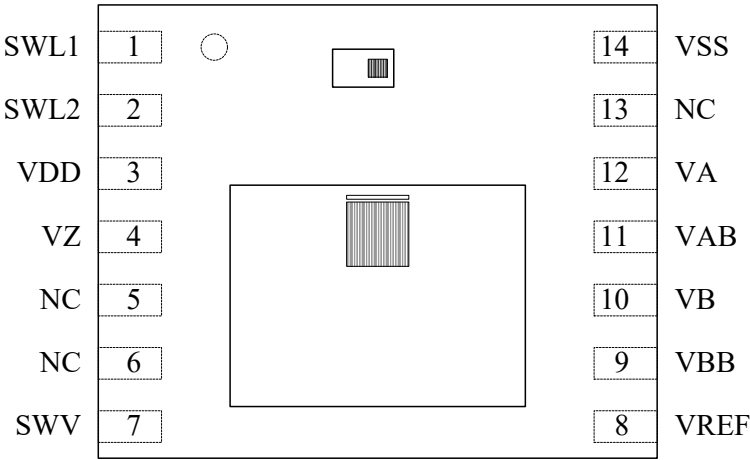

## 5. PIN DESCRIPTION

No.	Name	I/O	Function
1	SWL1	I	LED brightness setting input 1 (with pull-up resistance)
2	SWL2	I	LED brightness setting input 2 (with pull-up resistance)
3	VDD	-	Supply voltage
4	VZ	O	Z-phase digital signal output
5	NC	-	No connection (leave open-circuit)
6	NC	-	No connection (leave open-circuit)
7	SWV	I	Reference voltage setting input (with pull-up resistance)
8	VREF	O	Reference voltage output
9	VBB	O	B-phase inverting analog signal (BB phase) output
10	VB	O	B-phase analog signal (B phase) output
11	VAB	O	A-phase inverting analog signal (AB phase) output
12	VA	O	A-phase analog signal (A phase) output
13	NC	-	No connection (leave open-circuit)
14	VSS	-	Ground

## 6. ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Conditions	Rating	Unit	note
Supply voltage range	V <sub>DD</sub>	Voltage between VDD and VSS	-0.3 to +6.0	V	*1
Input voltage range	V <sub>IN</sub>	SWL1 , SWL2 , SWV pins	-0.3 to V <sub>DD</sub> +0.3	V	*1, *2
Output voltage range	V <sub>OUT</sub>	VA , VAB , VB , VBB , VREF , VZ pins	-0.3 to V <sub>DD</sub> +0.3	V	*1, *2
Storage temperature range	T <sub>STG</sub>	-	-30 to +85	°C	*3

\*1: Parameters must not exceed ratings, not even momentarily. If a rating is exceeded, there is a risk of IC failure, deterioration in characteristics, and decrease in reliability.

\*2: V<sub>DD</sub> in absolute value ratings refers to the recommended operating voltage V<sub>DD</sub> value.

\*3: Stored separately in Nitrogen (N<sub>2</sub>) atmosphere or vacuum.

## 7. RECOMMENDED OPERATING CONDITIONS

V<sub>SS</sub>=0V

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit
Supply voltage	V <sub>DD</sub>	Between VDD and VSS terminals	4.5	-	5.25	V
Operating temperature	T <sub>a</sub>		-30	-	85	°C
Response speed	R <sub>t</sub>		0	-	2	m/s

\* Operation outside the recommended operating conditions may adversely affect reliability. Use only within specified ratings.

## 8. ELECTRICAL CHARACTERISTICS

## 8.1. DC Characteristics

 $V_{DD} = 5V$  ,  $V_{SS} = 0V$  ,  $T_a = 27^{\circ}C$  unless otherwise noted


Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit	Pins
Current consumption 1	$I_{DD1}$	SWL1 = H , SWL2 = H	-	10	16	mA	VDD
Current consumption 2	$I_{DD2}$	SWL1 = H , SWL2 = L	-	14.2	22		
Current consumption 3	$I_{DD3}$	SWL1 = L , SWL2 = H Standard scale conditions	-	22	32		
Current consumption 4	$I_{DD4}$	SWL1 = L , SWL2 = L	-	5	9		
Reference voltage 1	$V_{ref1}$	SWV=H	1.1	1.45	1.8	V	VREF
Reference voltage 2	$V_{ref2}$	SWV=L	1.8	2.25	2.7		
A-phase signal offset voltage	$V_{AO}$	SWL1 = L , SWL2 = L Variation from VREF	-0.15	-	0.15	V	VA
AB-phase signal offset voltage	$V_{ABO}$						VAB
B-phase signal offset voltage	$V_{BO}$						VB
BB-phase signal offset voltage	$V_{BBO}$						VBB
Output voltage fluctuation 1	$V_{D1}$	Difference between 0 $\mu$ A and 50 $\mu$ A sink current	0	-	30	mV	VA VAB VB VBB
Output voltage fluctuation 2	$V_{D2}$	Difference between 0 $\mu$ A and 50 $\mu$ A sink current	-30	-	0		
Output voltage fluctuation 3	$V_{D3}$	Difference between 0 $\mu$ A and 50 $\mu$ A sink current	0	-	150	mV	VREF
Output voltage fluctuation 4	$V_{D4}$	Difference between 0 $\mu$ A and 50 $\mu$ A sink current	-150	-	0		
HIGH-level input voltage	$V_{IH}$	-	$0.8 \cdot V_{DD}$	-	$V_{DD}$	V	SWL1 SWL2 SWV
LOW-level input voltage	$V_{IL}$	-	0	-	$0.2 \cdot V_{DD}$	V	
HIGH-level input current	$I_{IH}$	$V_{IN} = V_{DD}$	-1	-	1	$\mu$ A	
LOW-level input current	$I_{IL}$	$V_{IN} = V_{SS}$	-20		-1	$\mu$ A	
Z-phase signal HIGH-level voltage	$V_{OH}$	$I_{out} = 0.5mA$ , SWV=L	$0.8 \cdot V_{DD}$	-	$V_{DD}$	V	VZ
Z-phase signal LOW-level voltage	$V_{OL}$	$I_{out} = -0.5mA$	0	-	$0.2 \cdot V_{DD}$	V	VZ

## 8.2. Analog Characteristics


$V_{DD} = 5V$ ,  $V_{SS} = 0V$ ,  $T_a = 27^\circ C$  unless otherwise noted

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit	Pins
A-phase output signal amplitude	$V_{AP-P}$	SWL1 = L, SWL2 = H Standard scale conditions Value of peak to peak	0.8	1.2	1.92	V	VA
AB-phase output signal amplitude	$V_{ABP-P}$						VAB
B-phase output signal amplitude	$V_{BP-P}$						VB
BB-phase output signal amplitude	$V_{BBP-P}$						VBB
A-phase - B-phase difference	$D_p$	Standard scale conditions	80	90	100	°	VA,VB
Z-phase signal output width	$W_Z$	Standard scale conditions $T = 20\mu m^{**1}$	0.17T	0.5T	0.7T	$\mu m$	VZ

\*1: "T" indicates the width of a single VA and VB cycle.

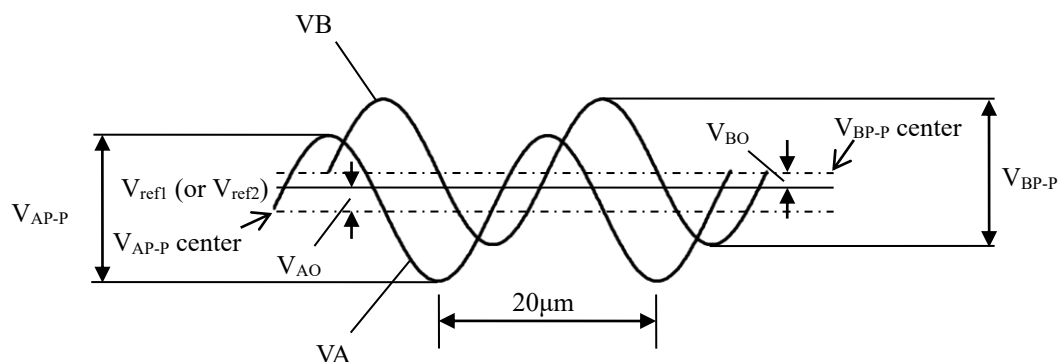

$V_{AO}$  and  $V_{BO}$  indicate the difference between the VA and VB center line and  $V_{ref1}$  (or  $V_{ref2}$ ), respectively.

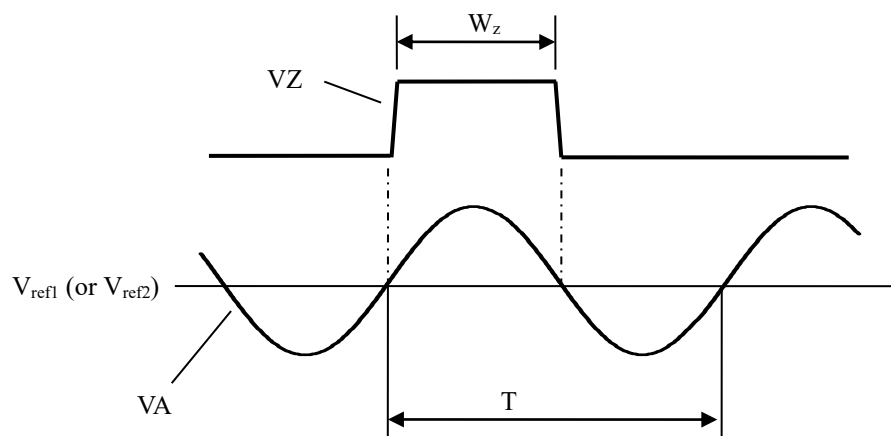

**8.3. AC Characteristics** $V_{DD} = 5V$  ,  $V_{SS} = 0V$  ,  $T_a = 27^{\circ}C$  unless otherwise noted

Parameter	Symbol	Conditions	MIN	TYP	MAX	Unit	Pins
Z-phase output signal rise time	$t_r$	$SWV = L$ , $C_L = 15\text{ pF}$ $0.1V_{DD} \rightarrow 0.9V_{DD}$	-	-	100	ns	VZ
Z-phase output signal fall time	$t_f$	$SWV = L$ , $C_L = 15\text{ pF}$ $0.9V_{DD} \rightarrow 0.1V_{DD}$	-	-	100	ns	VZ

**8.4. Standard Scale Conditions**

Electrical characteristics established under the following conditions.

Parameter		Conditions	Unit
Scale	Reflecting surface reflectance	50	%
	Non-reflecting surface reflectance	10	%
	Incremental pattern	20 $\mu\text{m}$ pitch, (10 $\mu\text{m}$ Cr line/10 $\mu\text{m}$ space)	-
	Z-phase pattern	30 $\mu\text{m}$ Cr line	-
Mounting	Gap ( $\Delta\text{Gap}$ )	0.7	mm
	Yaw angle ( $\Delta\theta_y$ ) Roll angle ( $\Delta\theta_r$ ) Pitch angle ( $\Delta\theta_p$ )	0	°

## 9. FUNCTIONAL DESCRIPTION

The SMD-04B projects visible LED light with a center wavelength of 650nm through a slit and onto a scale with a 20μm pitch pattern (10μm line/10μm space), and detects the relative movement between the ic and the scale by receiving a diffracted image of the reflected light using a photodiode detector. It outputs analog signals (sine wave) with 20μm period comprising an A-phase (VA) and B-phase (VB) that are 90° out of phase. It can also output a Z-phase digital signal formed using a 30μm reflective pattern at one location on the 20μm pitch scale. The Z-phase signal is output when the A-phase is HIGH ( $V_A > V_{ref1}$  (or  $V_{ref2}$ )).

To enable the Z-phase signal, set the LED brightness switching function to APC as described in section 9.1.

### 9.1. LED Brightness Switching Function

The SMD-04B has a function that adjusts the variation in signal amplitude by adjusting the LED brightness. The signal amplitude can be adjusted by changing the LED current to control the LED brightness as shown in the following table.

For details about APC adjustment, see section 9.2.

SWL1	H		L	
SWL2	H	L	H	L
A,B-phase analog signal amplitude	×1.0	×1.8	APC	OFF

### 9.2. LED Auto Power Control (APC) Brightness Adjustment Function

The SMD-04B has a built-in APC (Auto Power Control), LED brightness automatic adjustment function. It detects the light reflected from the scale using the photodiode detector, and controls the LED current to adjust the brightness.

In addition to reducing the fluctuation in amplitude of the A-phase (VA) and B-phase (VB) signals due to fluctuations in LED brightness, it also reduces the temperature dependency of the signal amplitude by compensating for changes in LED brightness due to temperature variations.

### 9.3. Reference Voltage Switching Function


The SMD-04B has a function for switching the reference voltage (Vref) by changing the setting of the SWV pin. Set the reference voltage according to the required input conditions of the following stage circuit.

When used with SWV=H, the VZ pin becomes an open-drain output.

### 10. Scale Mounting Conditions

The optical center of the encoder ic is offset from the physical center by 0.79 mm in the vertical direction ( $\Delta Y$  in the diagram below) and 0.0mm in the horizontal direction ( $\Delta X$  in the diagram below). If using a linear scale, you only need to take the offset in the scale width direction ( $\Delta Y$ ) into account. If using a rotary scale, the offset in the horizontal direction ( $\Delta X$ ) must also be taken into account.

The optimum optical conditions of the product will vary depending on the mounting conditions. Conduct careful evaluation to meet requirements. In particular, the effects on amplitude and phase difference due to mounting conditions are larger if using a small diameter rotary scale than if using a linear scale. Provision of separate mounting adjustments is recommended to achieve better product performance.

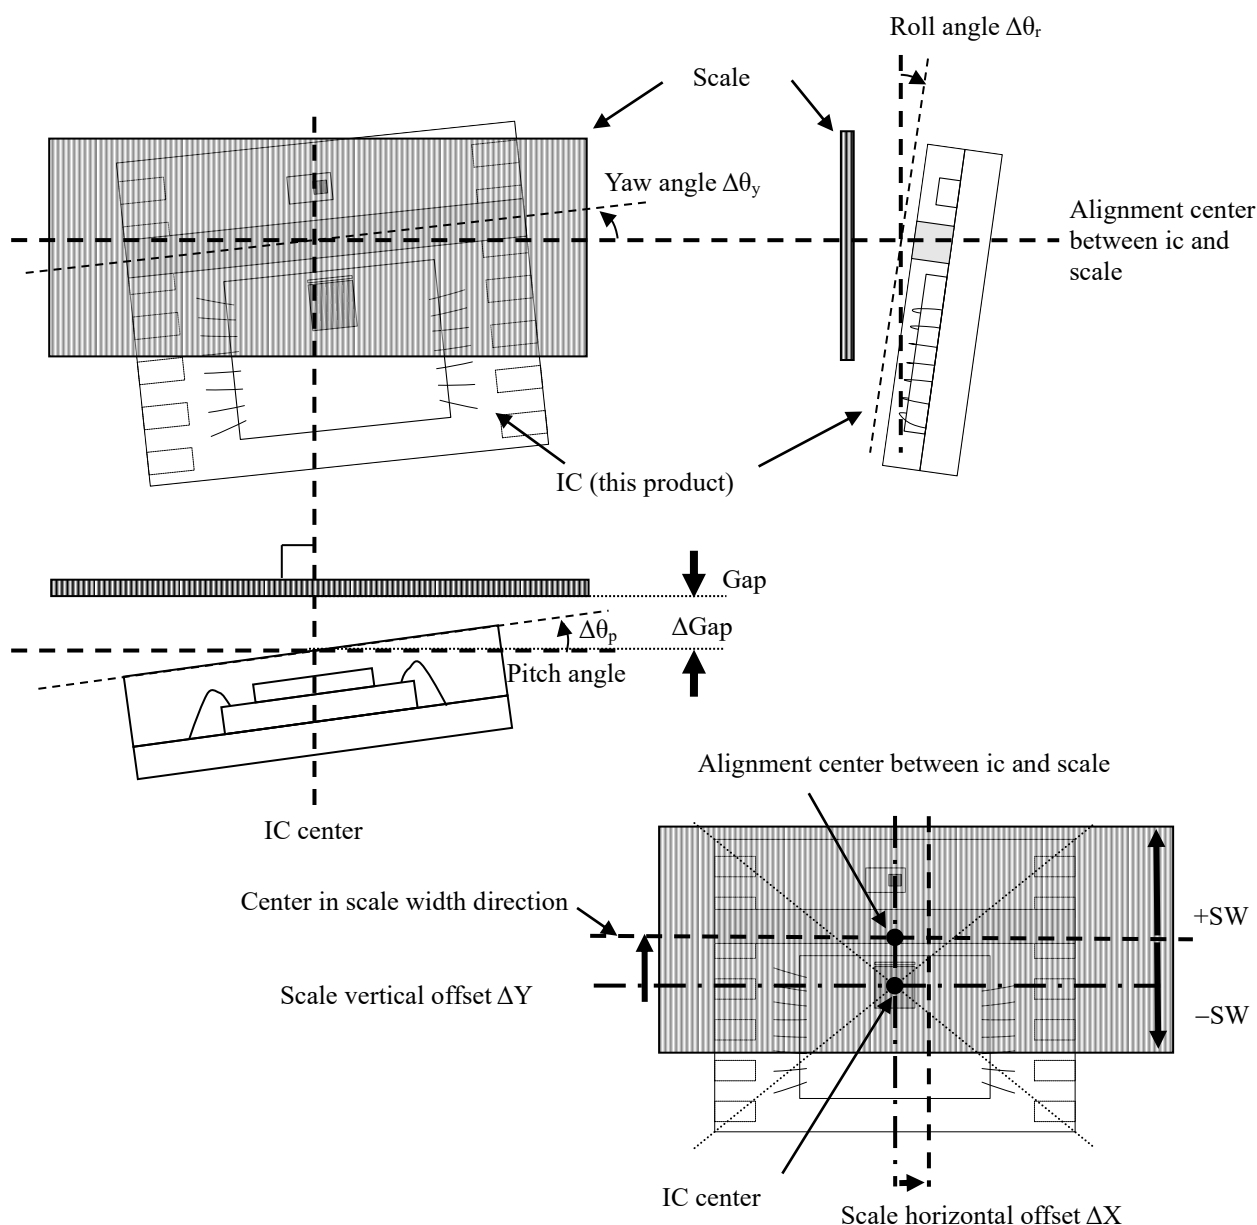

[Reference data]


	Parameter	Conditions	Unit
Scale	Scale width ( $\pm SW$ )	$\pm 1$ (min.)	mm
Mounting	Scale vertical offset ( $\Delta Y$ )	0.79	mm
	Scale horizontal offset ( $\Delta X$ )	0.0	mm




## 11. TYPICAL CHARACTERISTICS

\* NPC standard scale and mounting conditions


### 11.1. Mounting Characteristics

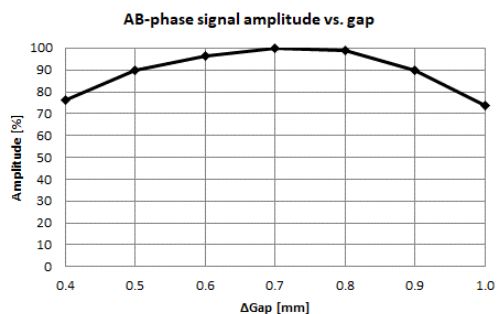


Amplitude v. Gap ( $\Delta\text{Gap}$ )

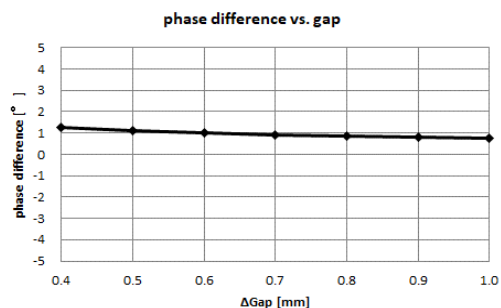


Phase difference v. Gap ( $\Delta\text{Gap}$ )

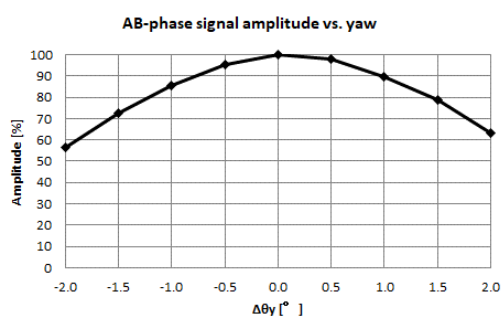


Amplitude v. Yaw angle ( $\Delta\theta_y$ )

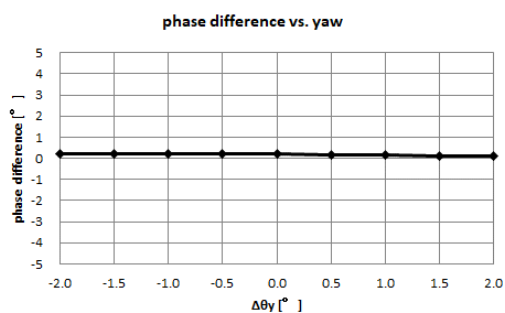


Phase difference v. Yaw angle ( $\Delta\theta_y$ )

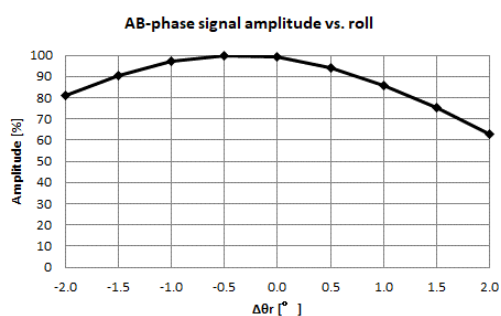


Amplitude v. Roll angle ( $\Delta\theta_r$ )

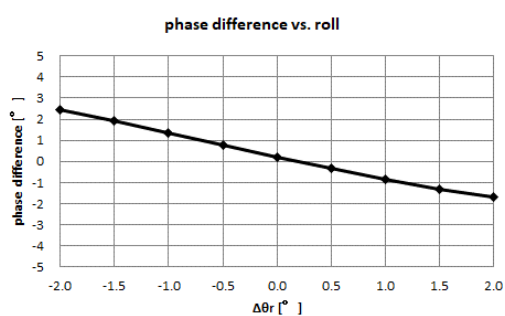

Phase difference v. Roll angle ( $\Delta\theta_r$ )

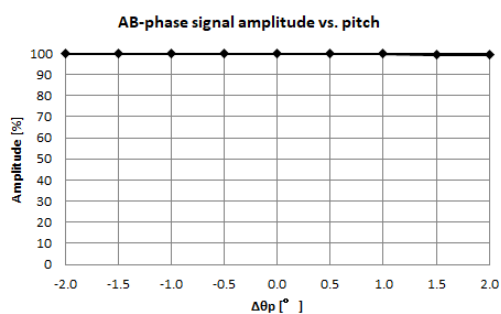


Amplitude v. Pitch angle ( $\Delta\theta_p$ )

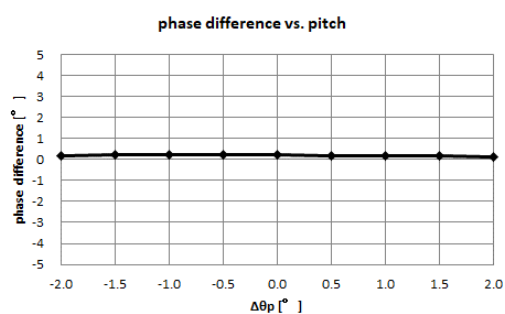


Phase difference v. Pitch angle ( $\Delta\theta_p$ )

11.2. Temperature Characteristic

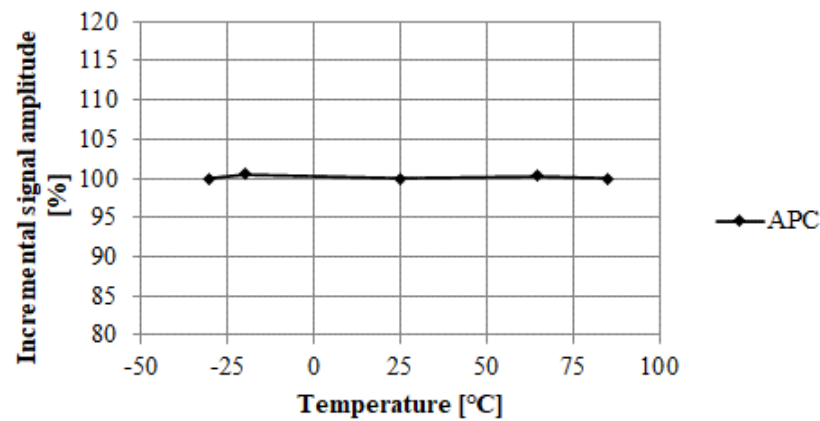


Amplitude v. Temperature ( $T_a$ )

11.3. Frequency Response

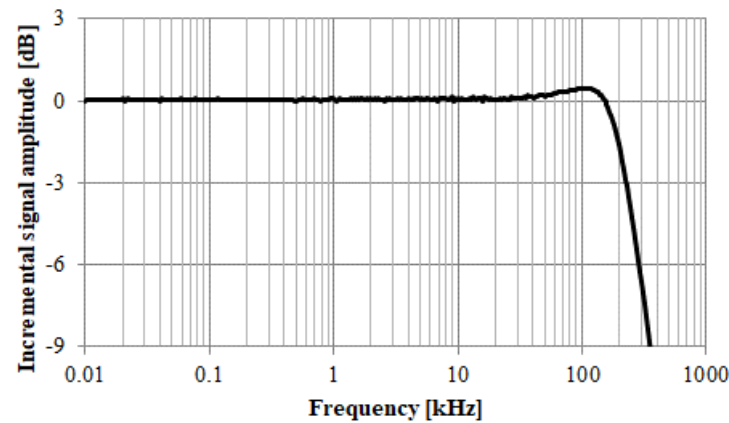

Amplitude v. Frequency


## 12. PACKAGE DIMENSIONS

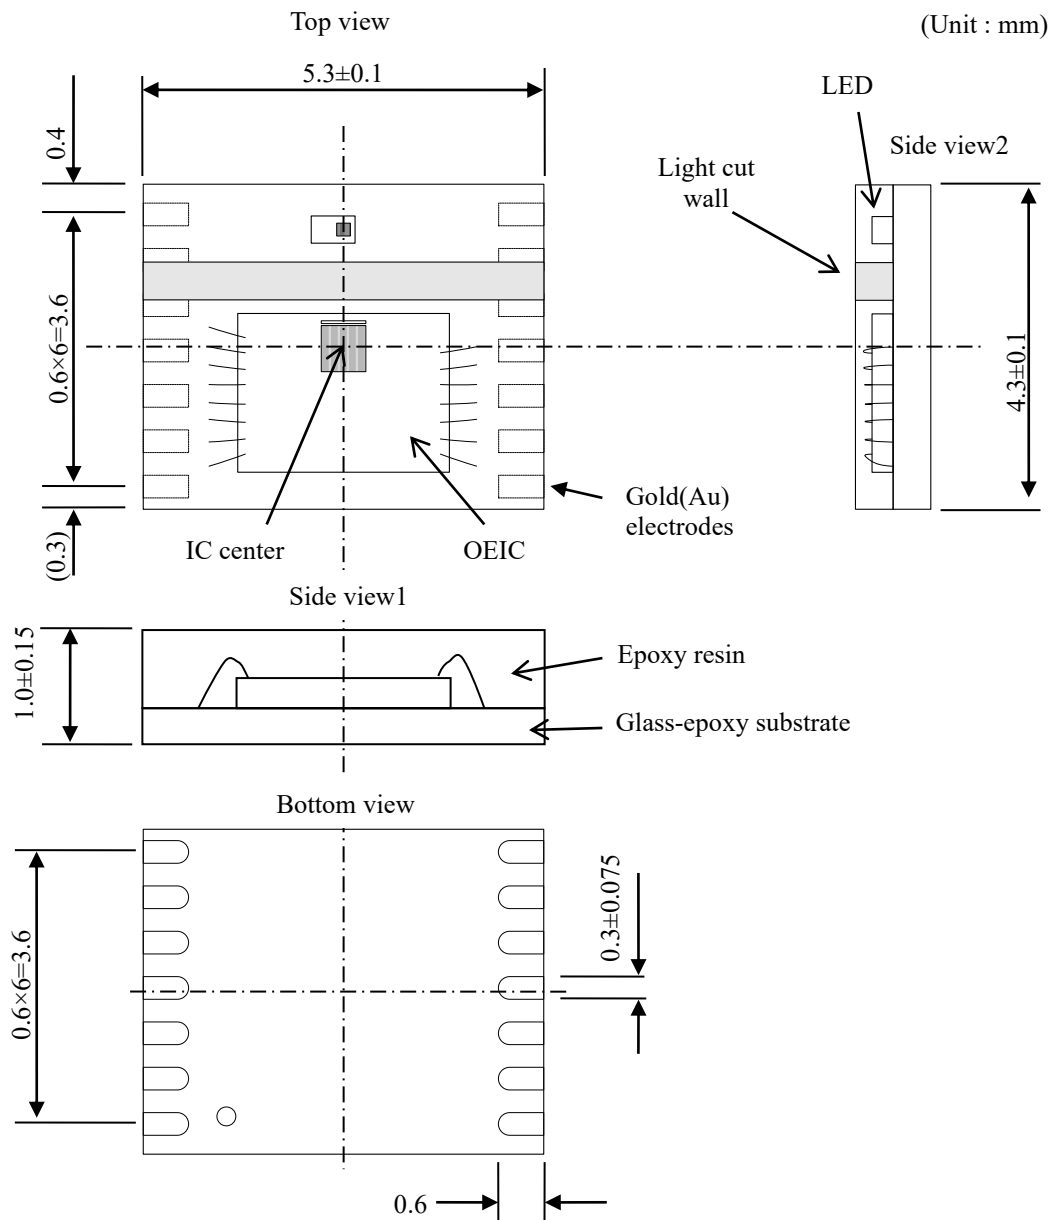

## 13. USAGE NOTE

Keep this product and the wiring emerging from this product (specifically the analog signal wiring) as far away as possible from the wiring for the drive actuator. The susceptibility of the encoder ic signal to noise will increase the closer the wiring is positioned. Chattering of the digital signal may occur with increasing noise, adversely affecting position detection accuracy.

To reduce the effects of noise, connect capacitors to the VDD and VSS lines of the product as shown below.

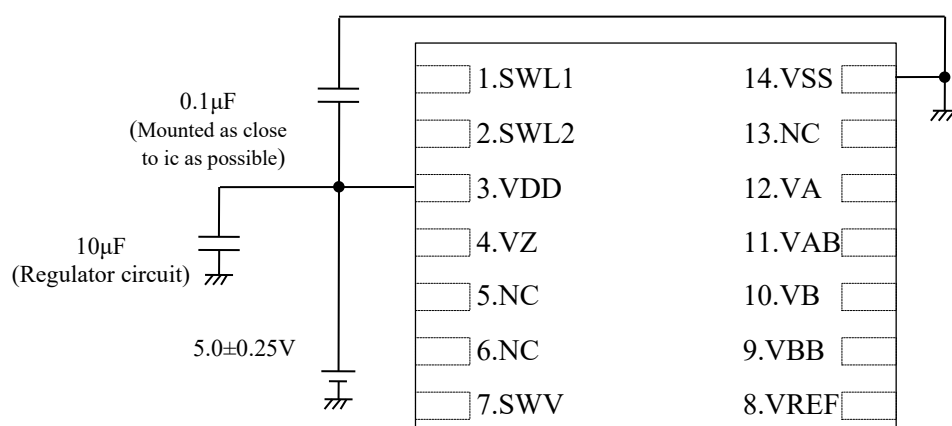

## 14. The back side marking

The "SMD-04\*" printed on the back of this product does not indicate the product name.

**15. USAGE AND PRECAUTIONS**

This product is designed and manufactured to the generally accepted standards of reliability as expected for use in general electronic and electrical equipment, such as personal equipment, machine tools, and measurement equipment. This product is not designed and manufactured to be used in any other special equipment requiring extremely high level of reliability and safety, such as aerospace equipment, nuclear power control equipment, medical equipment, transportation equipment, disaster prevention equipment, security equipment.

If you wish to use this product in equipment requiring extremely high level of reliability, please contact our sales department or representative in advance.

In the event that this product is used in such equipment, please take scrupulous care and apply fail-safe techniques including redundancy and malfunction prevention in order to prevent damage to life, health, property, or infrastructure etc. in case there is some malfunction in the product.

Please pay your attention to the following points at time of using the products shown in this document.

1. The products shown in this document (hereinafter "Products") are designed and manufactured to the generally accepted standards of reliability as expected for use in general electronic and electrical equipment, such as personal equipment, machine tools and measurement equipment. The Products are not designed and manufactured to be used in any other special equipment requiring extremely high level of reliability and safety, such as aerospace equipment, nuclear power control equipment, medical equipment, transportation equipment, disaster prevention equipment, security equipment. The Products are not designed and manufactured to be used for the apparatus that exerts harmful influence on the human lives due to the defects, failure or malfunction of the Products.  
If you wish to use the Products in that apparatus, please contact our sales section in advance.  
In the event that the Products are used in such apparatus without our prior approval, we assume no responsibility whatsoever for any damages resulting from the use of that apparatus.
2. NPC reserves the right to change the specifications of the Products in order to improve the characteristics or reliability thereof.
3. The information described in this document is presented only as a guide for using the Products. No responsibility is assumed by us for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patents or other rights of the third parties. Then, we assume no responsibility whatsoever for any damages resulting from that infringements.
4. The constant of each circuit shown in this document is described as an example, and it is not guaranteed about its value of the mass production products.
5. In the case of that the Products in this document falls under the foreign exchange and foreign trade control law or other applicable laws and regulations, approval of the export to be based on those laws and regulations are necessary. Customers are requested appropriately take steps to obtain required permissions or approvals from appropriate government agencies.
6. When exporting customer's products that use the Products, customers must comply with the "Foreign Exchange and Foreign Trade Act" and other export-related laws and regulations, and follow the necessary procedures in accordance with those laws and regulations. Do not use the Products in equipment whose sale is prohibited by export-related laws and regulations ("JP Foreign Exchange and Foreign Trade Act" and "US Export Administration Regulations", etc.). In addition, please do not sell the Products to users who are expected to use it for the above equipment or companies in its supply chain. If a user who uses module parts and equipment using the Products is a company suspected of violating human rights, please do not sell the above parts and equipment to that user.

**SEIKO NPC CORPORATION**

2-9-4, Taito, Taito-ku,  
Tokyo 110-0016, Japan  
Telephone: +81-3-6747-5300  
Facsimile: +81-3-6747-5303  
<http://www.npc.co.jp/>  
Email: [sales@npc.co.jp](mailto:sales@npc.co.jp)