

FRED

Ultrafast Soft Recovery Diode, 600V, 40A

Description:

These diodes are optimized to less losses and EMI/RFI in high frequency power conditioning system. The soft recovery character of the diodes offers buffer in most applications. These devices are suited for power converters and other applications where the switching losses are not significant portion of the total losses.


Features:

- Ultrafast Recovery
- 175°C operating junction temperature
- High frequency operation
- Low IR value
- Very Low forward voltage
- Epitaxial chip construction

| Product Summary | |
|-----------------|-------|
| V_R | 600 V |
| $I_{F(AV)}$ | 40 A |
| t_{rr} | 45 ns |

Applications:

- Switched mode power supply
- PFC
- UPS

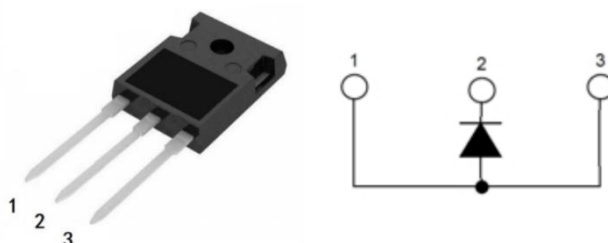

| Absolute Maximum Ratings | | | | | | |
|--|-------------|----------------------------------|-------------|---------------|------|---------|
| Parameter | Symbol | Test Conditions | Values | Units | | |
| Repetitive peak reverse voltage | V_{RRM} | | 650 | V | | |
| Continuous forward current | $I_{F(AV)}$ | $T_A=110^{\circ}C$ | 40 | A | | |
| Single pulse forward current | I_{FSM} | $T_A=25^{\circ}C$ | 400 | A | | |
| Maximum repetitive forward current | I_{FRM} | Square wave, 20kHz | 80 | A | | |
| Operating junction | T_j | | 175 | $^{\circ}C$ | | |
| Storage temperatures | T_{stg} | | -55 to +175 | $^{\circ}C$ | | |
| Electrical characteristics ($T_a=25^{\circ}C$ unless otherwise specified) | | | | | | |
| Parameter | Symbol | Test Conditions | Min. | Typ. | Max. | Units |
| Breakdown voltage | V_{BR} | $I_R=100\mu A$ | 650 | | | V |
| Blocking voltage | V_R | | | | | |
| Forward voltage | V_F | $I_F=40 A$ | | 1.35 | 1.65 | V |
| | | $I_F=40 A, T_j=125^{\circ}C$ | | 1.25 | 1.50 | V |
| Reverse leakage current | I_R | $V_R=V_{RRM}$ | | | 30 | μA |
| | | $T_j=150^{\circ}C, V_R=650V$ | | | 300 | μA |
| Reverse recovery time | t_{rr} | $I_F=0.5A, I_R=1A, I_{RR}=0.25A$ | | | 70 | ns |
| | | $I_F=1A, V_R=30V, di/dt=200A/us$ | | 32 | 45 | ns |
| Thermal characteristics | | | | | | |
| Parameter | Symbol | Typ | MAX | Units | | |
| Junction-to-Case | R_{thJC} | - | 0.80 | $^{\circ}C/W$ | | |

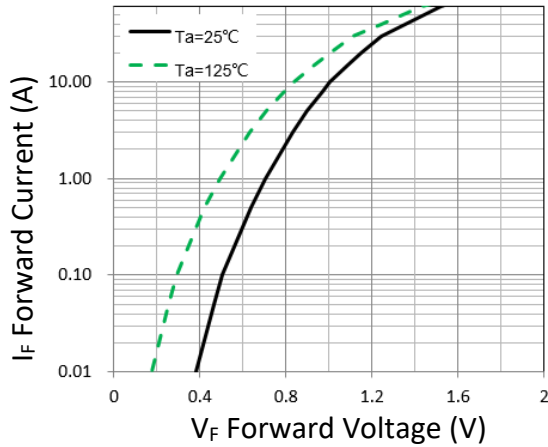


Figure 1. Forward Characteristic(typ.)

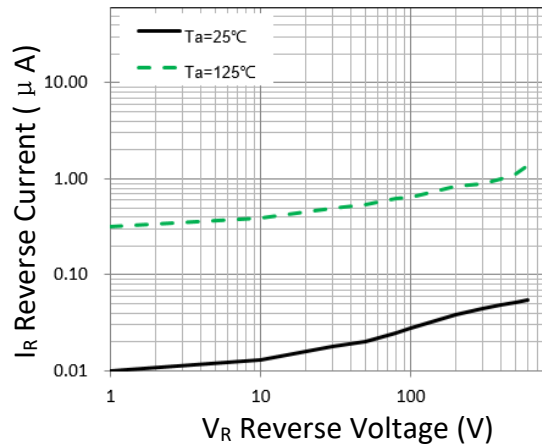


Figure 2. Reverse Characteristic (typ.)

| Package Information | | |
|---------------------|-------------------------|-------|
| TO-247 PACKAGE | | |
| Symbol | Dimensions(millimeters) | |
| | Min. | Max. |
| A | 4.80 | 5.20 |
| A1 | 2.21 | 2.61 |
| A2 | 1.85 | 2.15 |
| b | 1.10 | 1.30 |
| b1 | 2.55 | 2.85 |
| b2 | 1.90 | 2.15 |
| c | 0.50 | 0.75 |
| D | 20.70 | 21.30 |
| D1 | 16.25 | 16.85 |
| e | 5.25 | 5.65 |
| E | 15.60 | 16.00 |
| E1 | 13.06 | 13.46 |
| E2 | 4.80 | 5.20 |
| E3 | 1.80 | 2.50 |
| L | 19.62 | 20.22 |
| L1 | 4.00 | 4.30 |
| ΦP | 3.40 | 3.80 |
| ΦP1 | 7.00 | 7.30 |
| S | 5.95 | 6.35 |

Notice:

1. WXQZ reserves the right to make changes without notice in order to improve reliability, function or design and to discontinue any product or service without notice.
2. Customers should obtain the latest relevant information before orders and should verify that such information is current and complete.
3. All products are sold subject to WXQZ's terms and conditions supplied at the time of order acknowledgement.
4. WXQZ does not assume any liability arising from the use of any product or circuit designs described herein. Customers are responsible for their products and applications using WXQZ's components. To minimize risk, customers must provide adequate design and operating safeguards.