




AD-BAW56/V70/V99 Plastic-Encapsulated Diode

AD-BAW56/V70/V99 Switching diode

FEATURES

- High switching speed
- For general purpose switching applications
- High conductance
- AEC-Q101 qualified



MARKING AND EQUIVALENT CIRCUIT

| AD-BAW56 | | AD-BAV70 | | AD-BAV99 | |
|----------|--------------------|----------|--------------------|----------|--------------------|
| Marking | Equivalent circuit | Marking | Equivalent circuit | Marking | Equivalent circuit |
| | | | | | |

\bar{A}^* = Device code

MAXIMUM RATINGS ($T_j = 25^\circ\text{C}$ unless otherwise specified)





| Parameter | Symbol | Value | Unit |
|--|--------------------|-----------|---------------------------|
| Peak repetitive reverse voltage | V_{RRM} | 70 | V |
| Forward continuous current | I_{FM} | 200 | mA |
| Non-repetitive peak forward surge current @ $t = 8.3\text{ms}$ | I_{FSM} | 2 | A |
| Power dissipation | P_D | 225 | mW |
| Thermal resistance from junction to ambient | $R_{\theta JA}^1)$ | 556 | $^\circ\text{C}/\text{W}$ |
| Operating junction and storage temperature range | T_j, T_{stg} | -55 ~ 150 | $^\circ\text{C}$ |

ELECTRICAL CHARACTERISTICS ($T_j = 25^\circ\text{C}$ unless otherwise specified)



| Parameter | Symbol | Test condition | Min | Typ | Max | Unit |
|-------------------------------|----------|---|-----|-----|-------|---------------|
| Reverse breakdown voltage | V_{BR} | $I_R = 100\mu\text{A}$ | 70 | | | V |
| Forward voltage | V_{F1} | $I_F = 1\text{mA}$ | - | - | 0.715 | V |
| | V_{F2} | $I_F = 10\text{mA}$ | - | - | 0.855 | |
| | V_{F3} | $I_F = 50\text{mA}$ | - | - | 1 | |
| | V_{F4} | $I_F = 150\text{mA}$ | - | - | 1.25 | |
| Reverse current | I_R | $V_R = 70\text{V}$ | - | - | 2.5 | μA |
| Capacitance between terminals | C_T | $V_R = 0\text{V}, f = 1\text{MHz}$ | - | - | 1.5 | pF |
| Reverse recovery time | t_{rr} | $I_F = I_R = 10\text{mA}, I_{rr} = 1\text{mA}, R_L = 100\Omega$ | - | - | 6 | ns |

1) Measured with the device mounted on 1 inch² FR-4 board with 1oz. single-side copper, in a still air environment with $T_a = 25^\circ\text{C}$.

TYPICAL CHARACTERISTICS

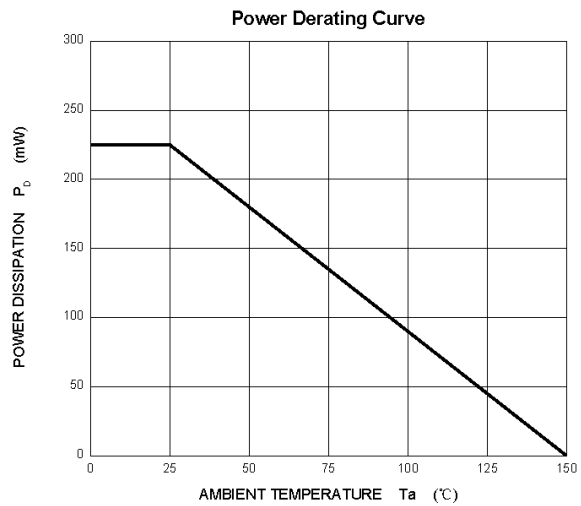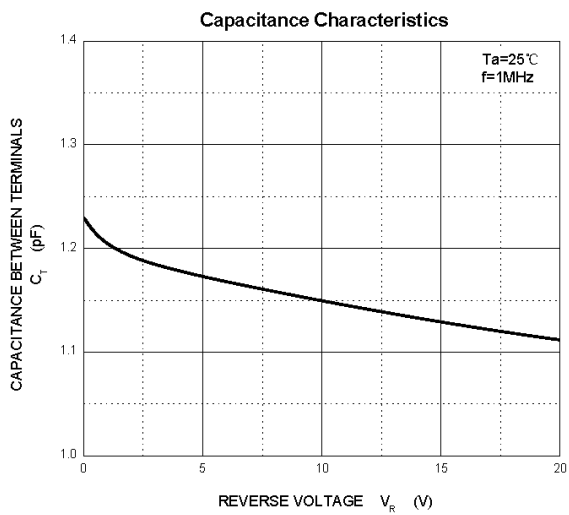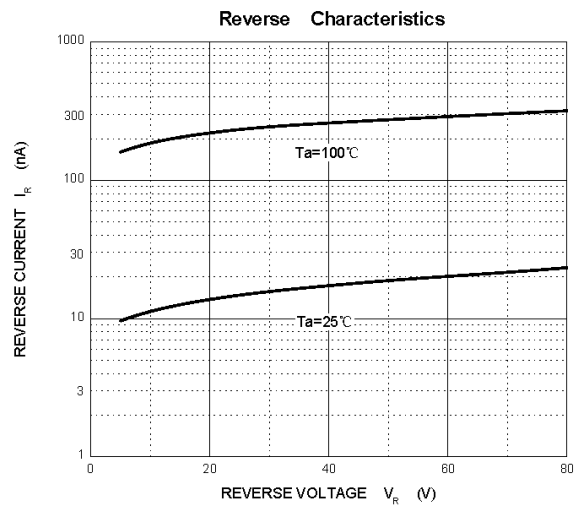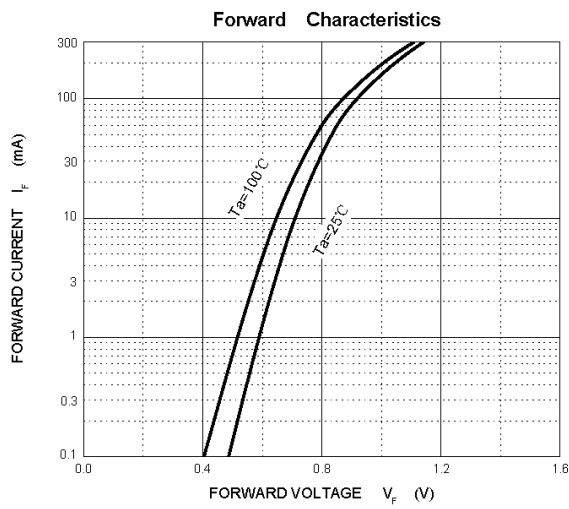


SOT-23 PACKAGE OUTLINE DIMENSIONS

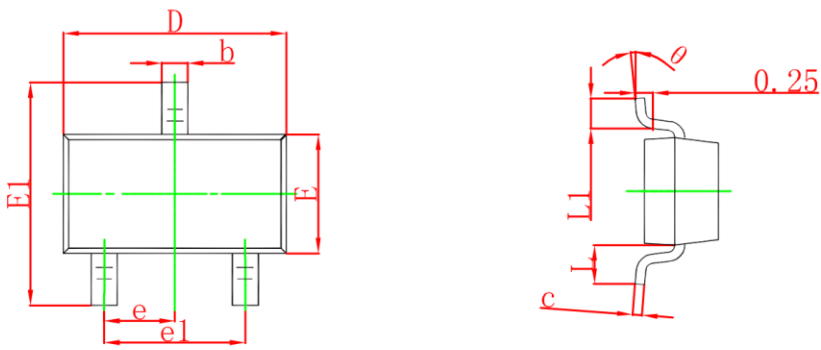

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 0.900 | 1.150 | 0.035 | 0.045 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.900 | 1.050 | 0.035 | 0.041 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.080 | 0.150 | 0.003 | 0.006 |
| D | 2.800 | 3.000 | 0.110 | 0.118 |
| E | 1.200 | 1.400 | 0.047 | 0.055 |
| E1 | 2.250 | 2.550 | 0.089 | 0.100 |
| e | 0.950 TYP | | 0.037 TYP | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.550 REF | | 0.022 REF | |
| L1 | 0.300 | 0.500 | 0.012 | 0.020 |
| θ | 0° | 8° | 0° | 8° |

SOT-23 SUGGESTED PAD LAYOUT

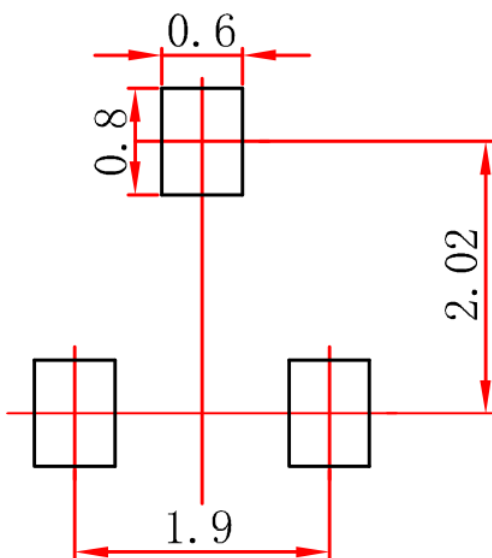


Note:

1. Controlling dimension in millimeters.
2. General tolerance: ±0.05mm.
3. The pad layout is for reference purpose only.

SOT-23 TAPE AND REEL

SOT-23 Embossed Carrier Tape

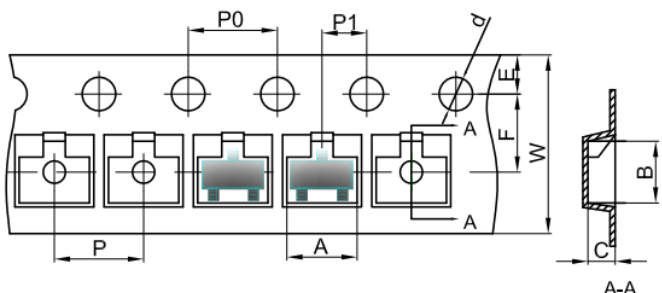


Packaging Description:
 SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


Dimensions are In millimeter

| Pkg type | A | B | C | d | E | F | P0 | P | P1 | W |
|----------|------|------|------|-------|------|------|------|------|------|------|
| SOT-23 | 3.15 | 2.77 | 1.22 | Ø1.50 | 1.75 | 3.50 | 4.00 | 4.00 | 2.00 | 8.00 |

SOT-23 Tape Leader and Trailer

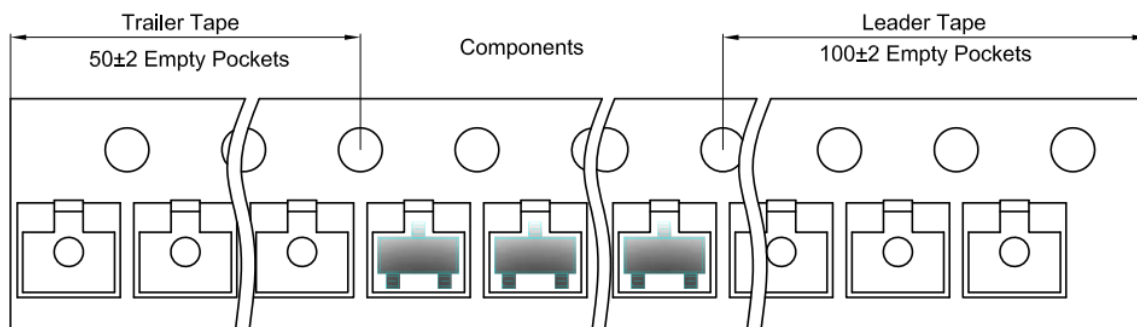

SOT-23 Reel

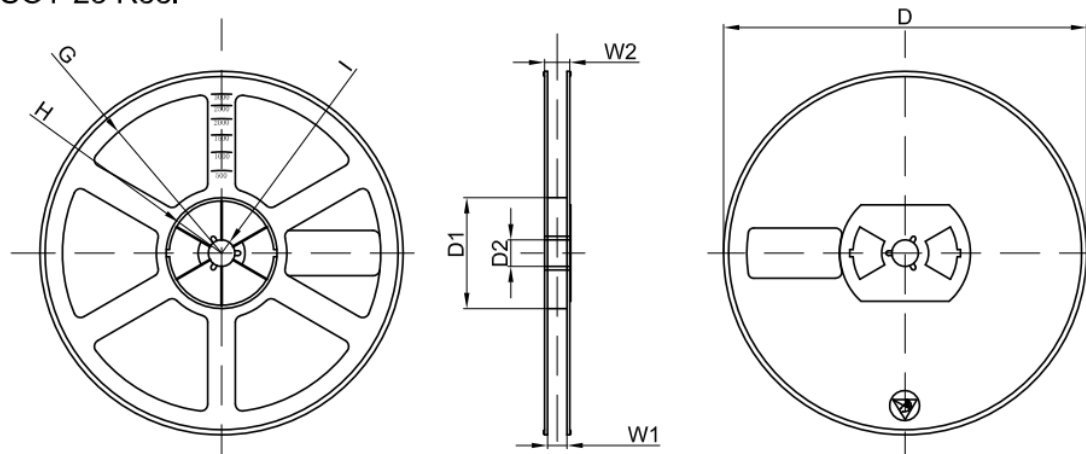

Dimensions are in millimeter

| Reel Option | D | D1 | D2 | G | H | I | W1 | W2 |
|-------------|---------|-------|-------|--------|--------|-------|------|-------|
| 7"Dia | Ø178.00 | 54.40 | 13.00 | R78.00 | R25.60 | R6.50 | 9.50 | 12.30 |

| REEL | Reel Size | Box | Box Size(mm) | Carton | Carton Size(mm) | G.W.(kg) |
|----------|-----------|------------|--------------|-------------|-----------------|----------|
| 3000 pcs | 7 inch | 45,000 pcs | 203×203×195 | 180,000 pcs | 438×438×220 | |

PUBLISHED BY**JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.**

13th Floor, C Block, Tengfei Building, Yan Chuang Yuan, Nanjing Jiangbei New Area, China

LEGAL DISCLAIMER

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples, hints or typical values stated herein and/or any information regarding the application of the device, JSCJ hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of JSCJ in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

INFORMATION

For further information on technology, delivery terms and conditions as well as prices, please contact your nearest JSCJ office (www.jscj-elec.com).

WARNINGS

Due to technical requirements, products may contain dangerous substances. For information on the types in question, please contact your nearest JSCJ office.

Except as otherwise explicitly approved by JSCJ in a written document signed by authorized representatives of JSCJ, JSCJ's products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury.