

Features

Fast switching
 Low turn-on voltage
 PN junction guard ring for
 transient and ESD protection
 Available in lead free version.




SOT-23

Mechanical Data

Case: SOT-23

Terminals: solderable per MIL-STD-202,
 Method 208



Ordering Information

Part Number	Package	Shipping	Marking Code
BAT54A,215-JSM	SOT-23	3000pcs / Tape & Reel	KL2

Maximum Ratings (@T_A=25°C unless otherwise specified)

Parameter	Symbol	Limits	Unit
Peak Repetitive Peak reverse voltage	V _{RRM}	30	V
Working Peak Reverse Voltage	V _{RWM}		
DC Reverse Voltage	V _R		
Forward Continuous Current	I _F	200	mA
Repetitive Peak Forward Current	I _{FRM}	300	mA
Forward surge current@tp<1s	I _{FSM}	600	mA





Thermal Characteristics

Parameter	Symbol	Limits	Unit
Power Dissipation *	P_D	250	mW
Thermal resistance junction to ambient air	$R_{\theta JA}$	500	$^{\circ}C/W$
Thermal resistance junction to case	$R_{\theta JC}$	360	$^{\circ}C/W$
Junction temperature	T_J	125	$^{\circ}C$
Storage temperature range	T_{STG}	-55 to +150	$^{\circ}C$

Electrical Characteristics (@ $T_A=25^{\circ}C$ unless otherwise specified)


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R=100\mu A$	30	-	-	V
Forward voltage *1	V_F	$I_F=0.1mA$	-	-	0.24	V
		$I_F=1mA$	-	-	0.32	V
		$I_F=10mA$	-	-	0.40	V
		$I_F=30mA$	-	-	0.50	V
		$I_F=100mA$	-	-	0.8	V
Reverse current *2	I_R	$V_R=25V$	-	-	2	μA
Capacitance Between Terminals	C_T	$V_R=1V, f=1MHz$	-	-	10	pF
Reverse Recovery Time	t_{rr}	$I_F=I_R=10mA$ $I_{rr}=0.1 \times I_R, R_L=100\Omega$	-	-	5	ns
*1: pulse test, $t_p \leq 300\mu s$ *2: pulse test, $t_p \leq 5ms$						

Ratings and Characteristic Curves ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

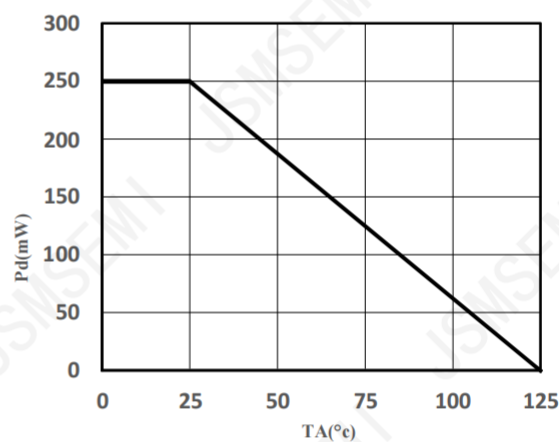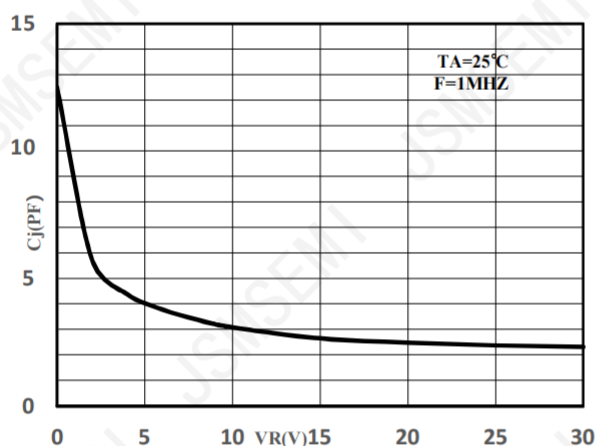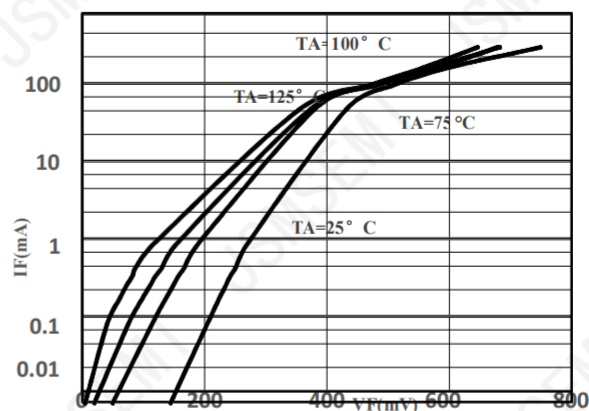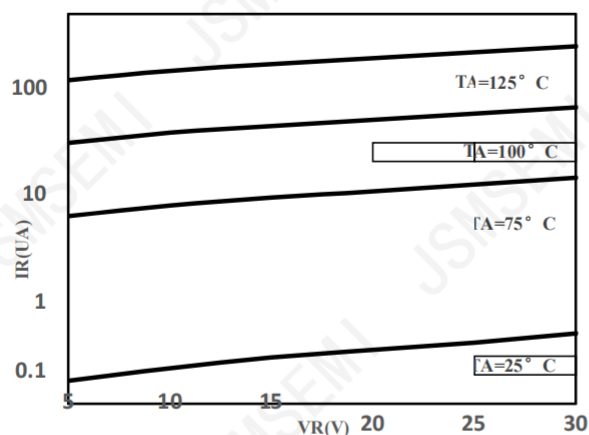

Package Outline Dimensions (unit: mm)


SOT-23

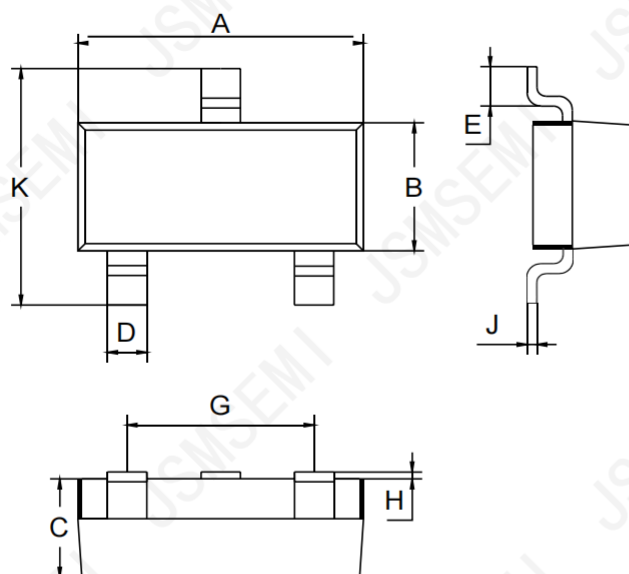

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60

Mounting Pad Layout (unit: mm)

SOT-23

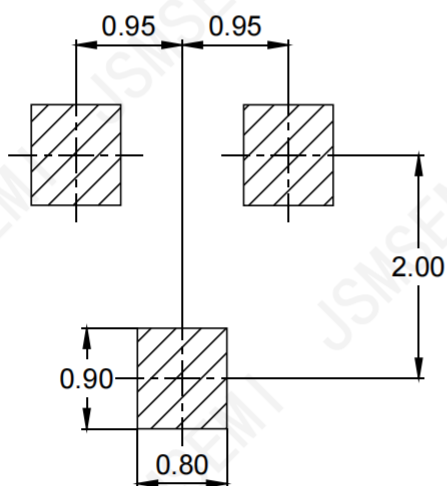

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com