
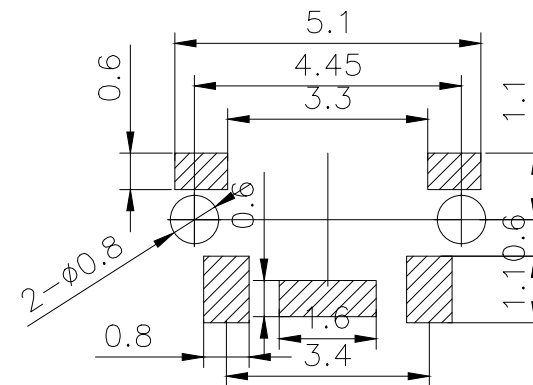
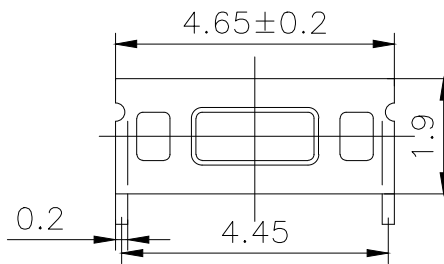


CIRCUIT DIAGRAM

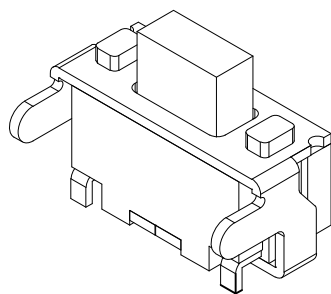

PCB. WELDING DRAWING

Specification

Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	1011 Ω min.
Contact resistance	100mΩ max. initial.
Dielectric Strength	250 V AC(1mm)
Travel	0.2±0.1mm
Storage Temperature	-30° C to 80° C

Packaging:  
a reel of 3,000 pieces

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR
E	Button	LCP	1	Black
D	COVER	Phosphor copper	1	Silver
C	DOME	Stainless Steel	1	Plated Ag
B	HOUSING	LCP	1	White
A	Cards	Phosphor copper	1	Plated Ag

Mechanical

P/N	Operating Force (gf)	Height mm	Button (J, G, T)	接地脚 (0, 1)	定位柱 (0, 1)
YTS1T004	2	250±50	B (Black)	1 (Ground Pin)	1 (Pegs)
	1	180±50	A	3.5	(none)

.X ±0.50	.X° ±2°	UNITS mm
.XX ±0.30	.XX° ±1°	
.XX ±0.10	.XX° ±0.5°	MAT'L
.XXX ±0.05		FINISH
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF YIYUAN TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF YIYUAN TECHNOLOGY CO.,LTD		Q'TY



深圳市怡远科技有限公司  
SHENZHEN YIYUAN TECHNOLOGY CO., LTD

PART NO. YTS1T004	TITLE: TACTILE SWITCH
APPD: ROGER	DWG NO.: YTS1T004
CHKD: ROC	
DR: BILLY WANG 2020/08/21	

SCALE	SHEET	REV.
1/1	1/1	A1