



FEATURES

- Complementary to BCV26, BCV46.
- High collector current.
- High current gain.
- For general AF applications.
- Complementary types:BCV26,BCV46

APPLICATIONS

- NPN silicon darlington transistor.



SOT-23

MAXIMUM RATING @ Ta=25°C unless otherwise specified


Symbol	Parameter	BCV27	BCV47	Units
V_{CBO}	Collector-Base Voltage	40	80	V
V_{CEO}	Collector-Emitter Voltage	30	60	V
V_{EBO}	Emitter-Base Voltage	10	10	V
I_C	Collector Current -DC	500		mA
I_{CM}	Collector Current –Peak	800		mA
I_B	Base Current -DC	100		mA
I_{BM}	Base Current –Peak	200		mA
P_C	Collector Dissipation	350		mW
T_j, T_{stg}	Junction and Storage Temperature	-65 to +150		°C

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$ BCV27 BCV47	40 80			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$ BCV27 BCV47	30 60			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	10			V
Collector cutoff current	I_{CBO}	$V_{CB}=30V, I_E=0$ BCV27 $V_{CB}=60V, I_E=0$ BCV47			0.1 0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=4V, I_C=0$			0.1	μA
DC current gain	h_{FE}	$V_{CE}=1V, I_C=100\mu A$ BCV27 BCV47	4000 2000			
DC current gain	h_{FE}	$V_{CE}=5V, I_C=10mA$ BCV27 BCV47	10k 4000			
DC current gain	h_{FE}	$V_{CE}=5V, I_C=0.1A$ BCV27 BCV47	20k 10k			
DC current gain	h_{FE}	$V_{CE}=5V, I_C=0.5A$ BCV27 BCV47	4000 2000			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=100mA, I_B=0.1mA$			1	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=100mA, I_B=0.1mA$			1.5	V
Transition frequency	f_T	$V_{CE}=5V, I_C=50mA$ $f=100MHz$		170		MHz
Collector-base capacitance	C_{cb}	$V_{CB}=10V, f=1MHz$		3.5		pF


TYPICAL CHARACTERISTICS @ $T_a=25^\circ\text{C}$ unless otherwise specified

Total power dissipation $P_{\text{tot}} = f(T_S)$

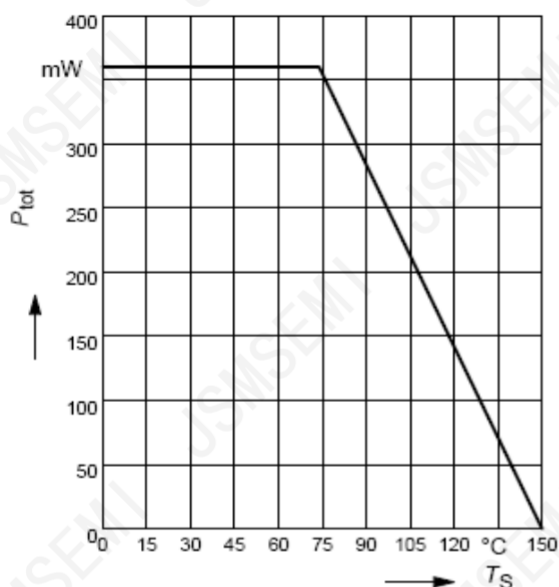


Collector-base capacitance $C_{CB} = f(V_{CB0})$

Emitter-base capacitance $C_{EB} = f(V_{EB0})$

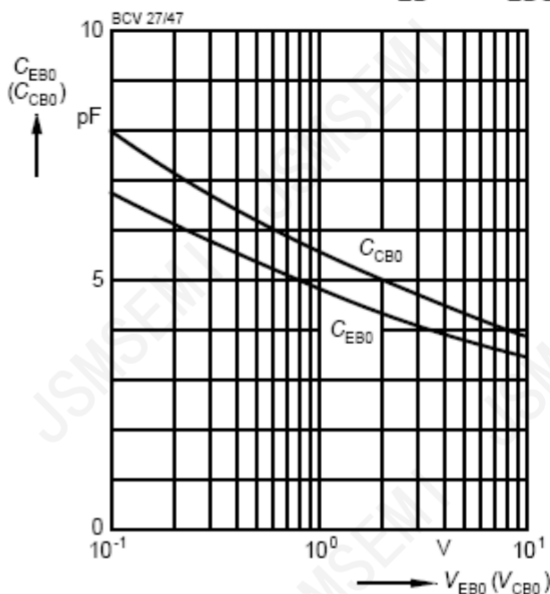


Base-emitter saturation voltage

$$I_C = f(V_{BE\text{sat}}), h_{FE} = 1000$$

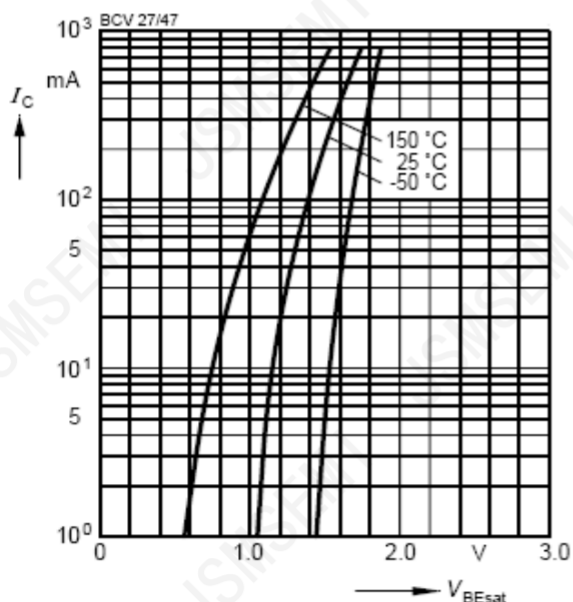

Collector-emitter saturation voltage


$$I_C = f(V_{CE\text{sat}}), h_{FE} = 1000$$

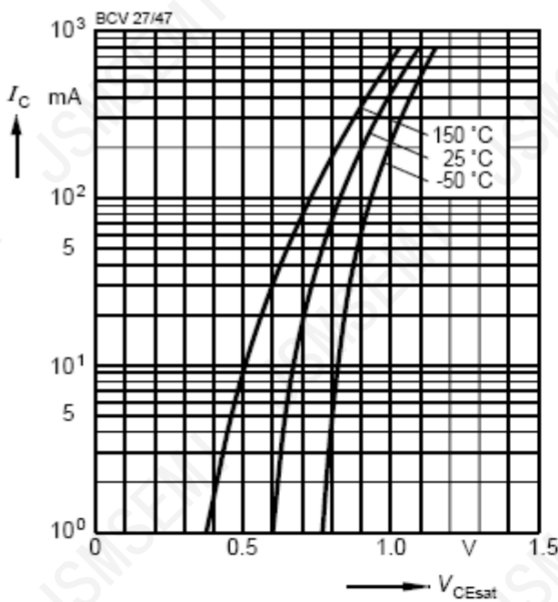

PACKAGE OUTLINE


Plastic surface mounted package

SOT-23

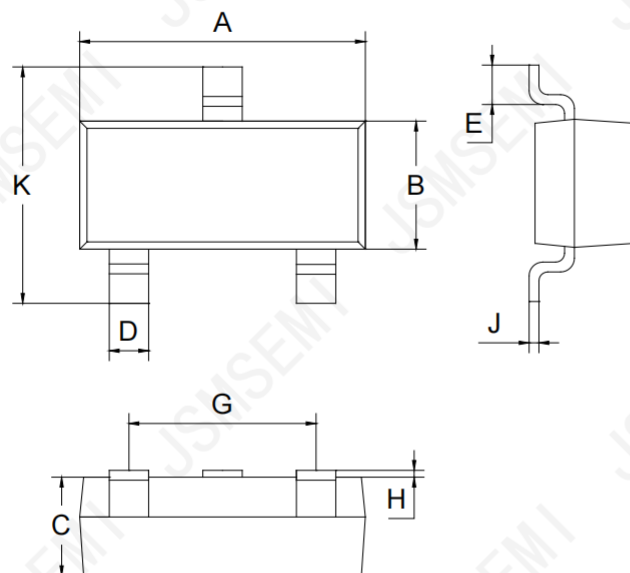

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60
All Dimensions in mm		

SOLDERING FOOTPRINT

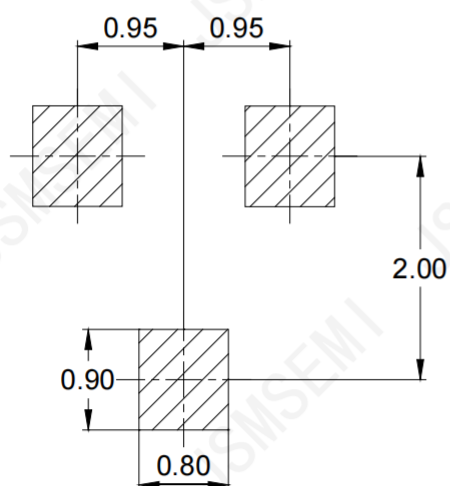

Unit: mm

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com