


FEATURES


- ◆ Epitaxial planar die construction.
- ◆ Complementary PNP type available MMBT2907A.
- ◆ Ultra-small surface mount package.
- ◆ MSL 1

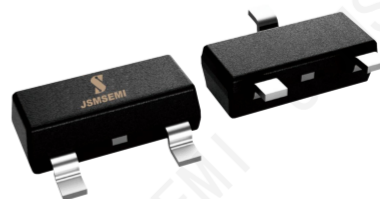

SOT-23

APPLICATIONS

- ◆ Use as a medium power amplifier.
- ◆ Switching requiring collector currents up to 500mA.



MAXIMUM RATING @ Ta=25°C unless otherwise specified

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	75	V
V _{CEO}	Collector-Emitter Voltage	40	V
V _{EBO}	Emitter-Base Voltage	6	V
I _C	Collector Current -Continuous	600	mA
I _{CM}	Collector Current –Peak pulse width≤40us,δ = 0.35	1.5	A
P _C	Collector Dissipation Alumina Substrate (Note 1) TA = 25°C	300	mW
P _C	Collector Dissipation FR-5 Board (Note 2) TA = 25°C	225	mW
R _{θJA}	Thermal resistance junction to ambient	417	°C/W
R _{θJC}	Thermal Resistance Junction to Case	250	°C/W
T _J ,T _{STG}	Junction and Storage Temperature	-55 to +150	°C

Note 1. FR-5 = 1.0 0.75 0.062 in.

Note 2. Alumina = 0.4 0.3 0.024 in. 99.5% alumina.

ELECTRICAL CHARACTERISTICS @ Ta=25°C unless otherwise specified

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=10\mu A, I_E=0$	75			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=10\mu A, I_C=0$	6			V
Collector cut-off current	I_{CBO}	$V_{CB}=60V, I_E=0$			0.01	μA
Collector cut-off current	I_{CEX}	$V_{CE}=60V, V_{BE}=-3.0V$			0.01	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=3V, I_C=0$			0.01	μA
DC current gain	h_{FE}	$V_{CE}=10V, I_C=150mA$	100		300	
		$V_{CE}=10V, I_C=0.1mA$	35			
		$V_{CE}=10V, I_C=1.0mA$	50			
		$V_{CE}=10V, I_C=10mA$	75			
		$V_{CE}=10V, I_C=10mA$ $T_A=-55^{\circ}C$	35			
		$V_{CE}=10V, I_C=500mA$	40			
		$V_{CE}=1V, I_C=150mA$	50			
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=500mA, I_B=50mA$ $I_C=150mA, I_B=15mA$			1.0 0.3	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C=500mA, I_B=50mA$ $I_C=150mA, I_B=15mA$		0.6	2.0 1.2	V
Transition frequency	f_T	$V_{CE}=20V, I_C=20mA$ $f=100MHz$	300			MHz
Output capacitance	C_{obo}	$V_{CB}=10V, I_E=0, f=1.0MHz$		8.0		pF
Input capacitance	C_{ibo}	$V_{EB}=0.5V, I_C=0,$ $f=1.0MHz$		25		pF
Delay time	t_d	$V_{CC}=30V, V_{BE(off)}=-0.5V$			10	ns
Rise time	t_r	$I_C=150mA, I_{B1}=15mA$			25	ns
Storage time	t_s	$V_{CC}=30V, I_C=150mA$			225	ns
Fall time	t_f	$I_{B1}=-I_{B2}=15mA$			60	ns

ESD RATING

Characteristic	Symbol	Value	Unit	JEDEC Class
Electrostatic Discharge - Human Body Model	ESD HBM	4,000	V	3A
Electrostatic Discharge - Machine Model	ESD MM	400	V	C

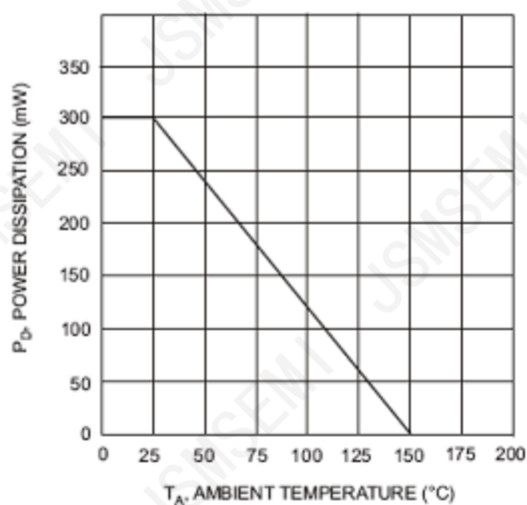
TYPICAL CHARACTERISTICS @ $T_A = 25^\circ\text{C}$ unless otherwise specified


Fig. 1 Max Power Dissipation vs Ambient Temperature

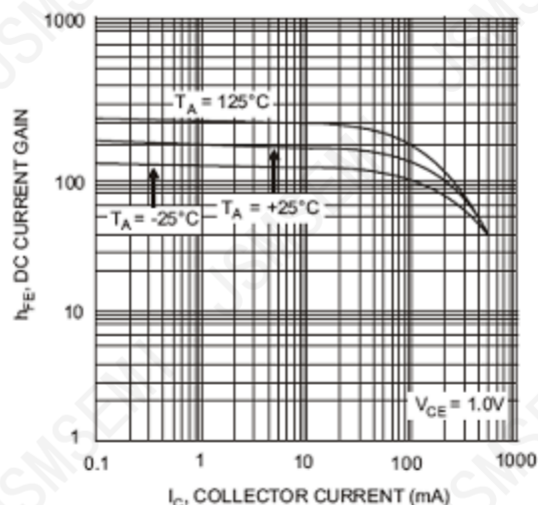


Fig. 2 Typical DC Current Gain vs Collector Current

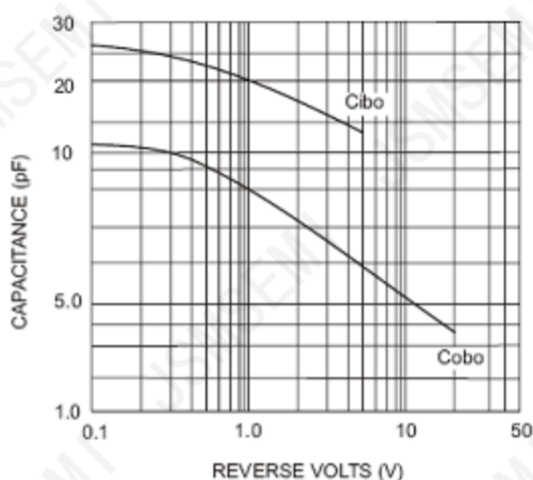


Fig. 3 Typical Capacitance

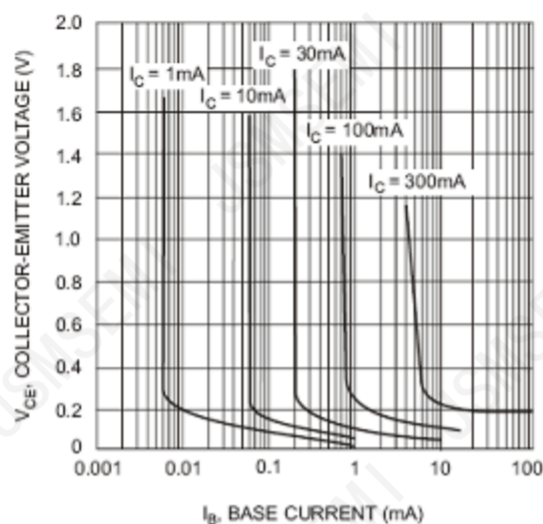


Fig. 4 Typical Collector Saturation Region

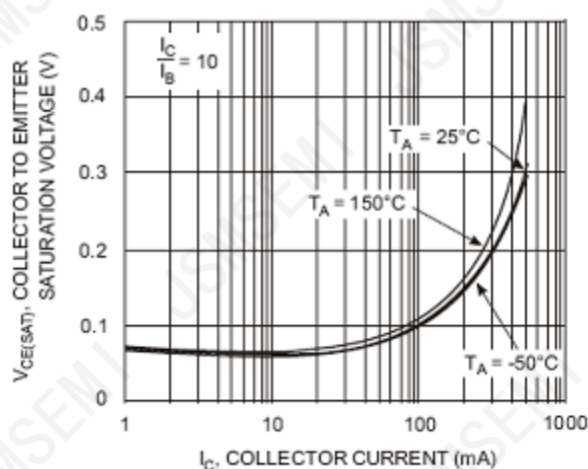


Fig. 5 Collector Emitter Saturation Voltage vs. Collector Current


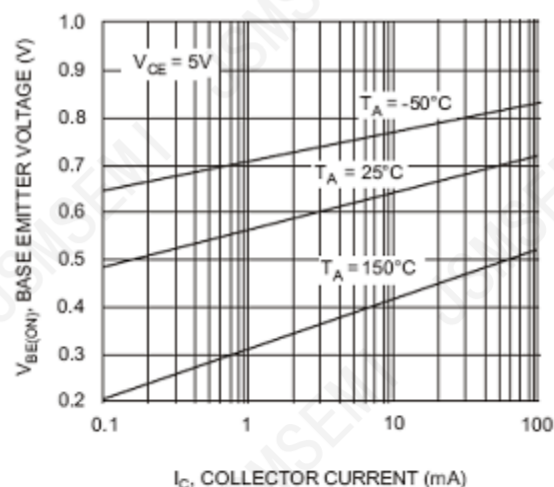


Fig. 6 Base Emitter Voltage vs. Collector Current

PACKAGE OUTLINE


Plastic surface mounted package

SOT-23

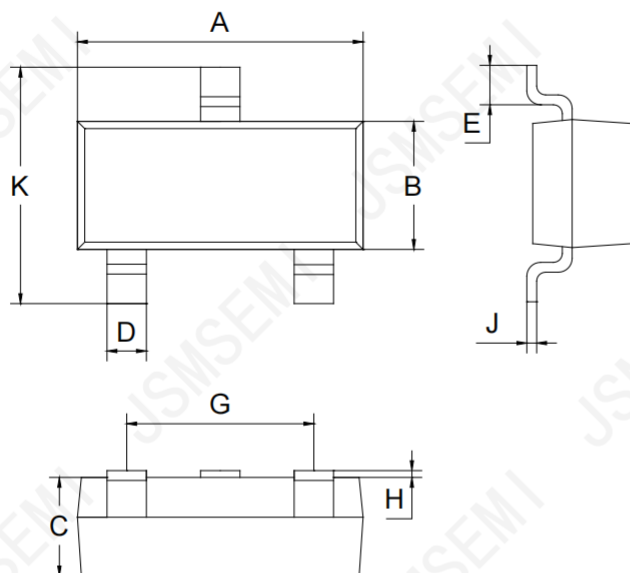

SOT-23		
Dim	Min	Max
A	2.70	3.10
B	1.10	1.50
C	0.90	1.10
D	0.30	0.50
E	0.35	0.48
G	1.80	2.00
H	0.02	0.10
J	0.05	0.15
K	2.20	2.60
All Dimensions in mm		

SOLDERING FOOTPRINT

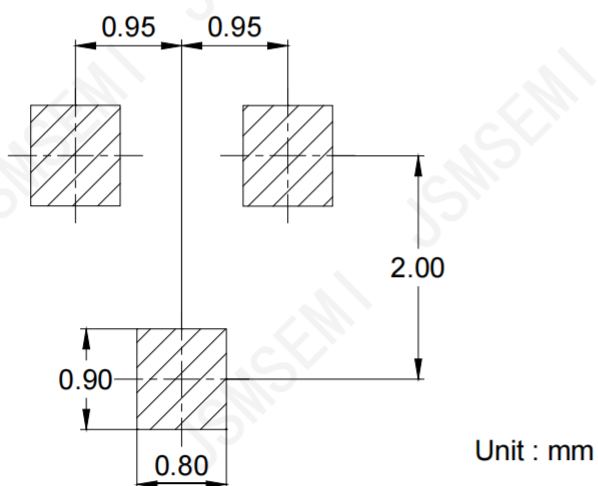

Unit : mm

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com