

## DESCRIPTION


The PESD5V0S1UL,315-JSM is designed to protect voltage sensitive components from ESD and transient voltage events. Excellent clamping capability, low leakage, and fast response time, make these parts ideal for ESD protection on designs where board space is at a premium. Because of its small size, it is suited for use in cellular phones, portable devices, digital cameras, power supplies and many other portable applications.

## FEATURES


- ◆ Transient protection for high-speed data lines  
IEC 61000-4-2 (ESD)  $\pm 15\text{kV}$  (Air)  
 $\pm 8\text{kV}$  (Contact)
- ◆ Protects one directional I/O line
- ◆ Low clamping voltage
- ◆ Working voltages : 3.3V, 5V, 8V, 12V, 15V
- ◆ Low leakage current

## APPLICATIONS

- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Personal Digital Assistants (PDA's)
- ◆ Notebooks, Desktops, and Servers
- ◆ Portable Instrumentation
- ◆ Peripherals
- ◆ Pagers

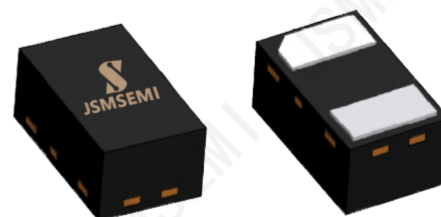

PACKAGE OUTLINE

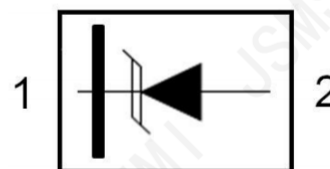

PIN CONFIGURATION

## MACHANICAL DATA

- ◆ DFN1006 package
- ◆ Packaging: Tape and Reel
- ◆ High temperature soldering guaranteed:  $260^{\circ}\text{C}/10\text{s}$
- ◆ Reel size: 7 inch

### ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
$V_{ESD}$	ESD per IEC 61000-4-2 (Air)	$\pm 30$	Kv
	ESD per IEC 61000-4-2 (Contact)	$\pm 22$	
$P_D$	Total Power Dissipation on FR-5 Board (Note 1) @ $T_a=25^{\circ}\text{C}$	150	Mw
$T_J, T_{STG}$	Junction and Storage Temperature	$-55/+150$	$^{\circ}\text{C}$
$T_L$	Lead Solder Temperature – Maximum (10 Second Duration)	260	$^{\circ}\text{C}$

These ratings are limiting values above which the serviceability of the diode may be impaired

Note 1. FR-5=1.0x0.75x0.62 in.

### ELECTRICAL CHARACTERISTICS ( $T_{amb}=25^{\circ}\text{C}$ )

Part Number	$V_{RWM}$ (V)	$I_R$ ( $\mu\text{A}$ )	$V_B$ (V)	$I_T$ (Ma)	$V_C$ (V)		$V_C$ (V)		(W) Ppk	$C_J(\text{Pf})$ )Max.
	Max.	Max.	Min.		Max.	@A	Max.	@A	Max.	
PESD5V0S1UL,315-JSM	5.0	1	6.2	1	11.6	5.0	15.0	7.0	105	80

### ELECTRICAL CHARACTERISTICS CURVE

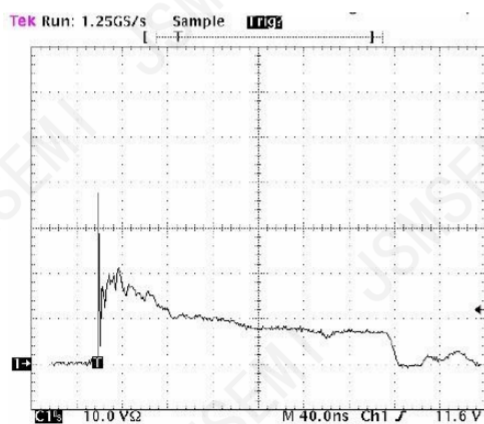


Figure 1. ESD Clamping Voltage Screenshot  
Positive 8 kV contact per IEC 61000-4-2


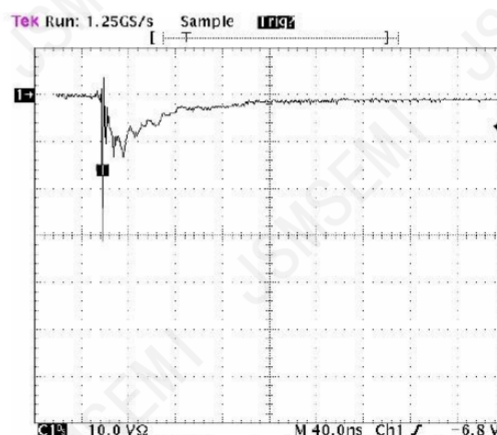


Figure 2. ESD Clamping Voltage Screenshot  
Negative 8 kV contact per IEC 61000-4-2


# DFN1006 PACKAGE OUTLINE DIMENSIONS

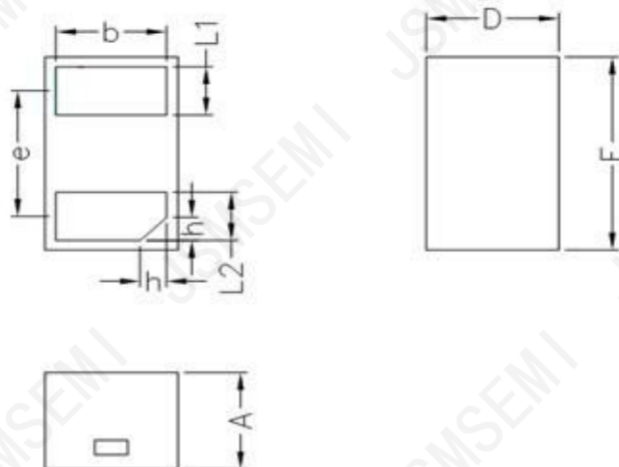

Unit: mm

	MIN	NOM	MAX
D	0.55	0.60	0.65
E	0.95	1.00	1.05
L1	0.20	0.25	0.30
L2	0.20	0.25	0.30
b	0.45	0.50	0.55
e	0.65BSC		
A	0.45	0.50	0.55
h	0.07	0.12	0.17

Dimension: Millimeter  
( Stencil thickness: 0.1 )

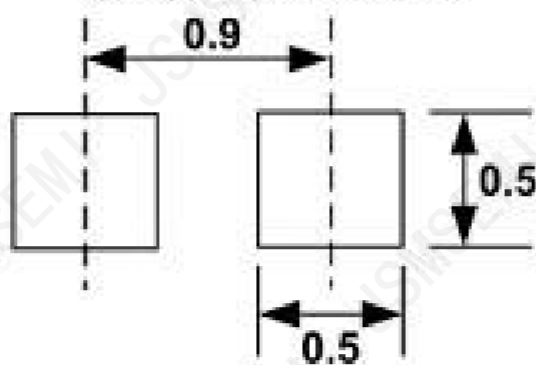

**Soldering Footprint**

## Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

## Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com