


DESCRIPTION

The PESD15VL2BT,215-JSM is designed for applications requiring transient over voltage protection capability.


They are intended for use in voltage and ESD sensitive equipment such as computers, printers, business machines, communication systems, medical equipment and other applications.

These devices are ideal for situations where board space is at a premium.

This series has been specifically designed to protect sensitive components which are connected to power data and transmission lines from over voltage caused by ESD (electrostatic discharge), CDE (Cable Discharge Events), and EF (electrical fast transients).



SOT-23



PIN CONFIGURATION

FEATURES

- ◆ IEC61000-4-2 (ESD) $\pm 30\text{kV}$ (Contact)
 $\pm 30\text{kV}$ (Air)
- ◆ IEC61000-4-4 (EFT) 40A (5/50ns)
- ◆ 350 (200) Watts Peak Pulse Power per
($t_p=8/20\mu\text{s}$)
- ◆ Protects two bidirectional lines
- ◆ Low clamping voltage
- ◆ Working voltages: 3.3V to 24V
- ◆ Low leakage current

APPLICATIONS

- ◆ Cell Phone Handsets and Accessories
- ◆ Microprocessor based equipment
- ◆ Personal Digital Assistants (PDA's)
- ◆ Notebooks, Desktops, and Servers
- ◆ Portable Instrumentation
- ◆ Networking and Telecom
- ◆ Serial and Parallel Ports.
- ◆ Peripherals

MACHANICAL DATA

- ◆ SOT-23 package
- ◆ Packaging: Tape and Reel
- ◆ High temperature soldering guaranteed:
260°C/10s
- ◆ Reel size: 7 inch
- ◆ MSL 1





ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
V_{ESD}	ESD per IEC 61000-4-2 (Contact)	± 30	kV
	ESD per IEC 61000-4-2 (Air)	± 30	
P_{PP}	Peak Pulse Power (8/20 μ s) (3V3、5V0L2BT)	350	W
P_{pp}	Peak Pulse Power (8/20 μ s) (12、15、24L2BT)	200	W
T_{OPT}	Operating Temperature	-55/+150	°C
T_{STG}	Storage Temperature	-55/+150	°C
T_L	Lead Soldering Temperature	260 (10 sec.)	°C



ELECTRICAL CHARACTERISTICS (Tamb=25°C)

PART NUMBER	V_{RWM} (V) (max.)	V_B (V) (min.)	I_T (mA)	$V_C@1A$ (V) (max.)	V_C (V) (max.) (@A)		I_R (μ A) (max.)	C_J (pF) (max.)
PESD3V3L2BT,215-JSM	3.3	5.8	1	7.5	23.0	15	2	120
PESD5V0L2BT,215-JSM	5.0	7.0	1	9.8	24.0	13	1	100
PESD12VL2BT,215-JSM	12.0	14.2	1	19.0	35.0	5	0.05	25
PESD15VL2BT,215-JSM	15.0	17.1	1	25.0	43.0	5	0.05	22
PESD24VL2BT,215-JSM	24.0	25.4	1	39.0	58.0	3	0.05	18

ELECTRICAL CHARACTERISTICS CURVE

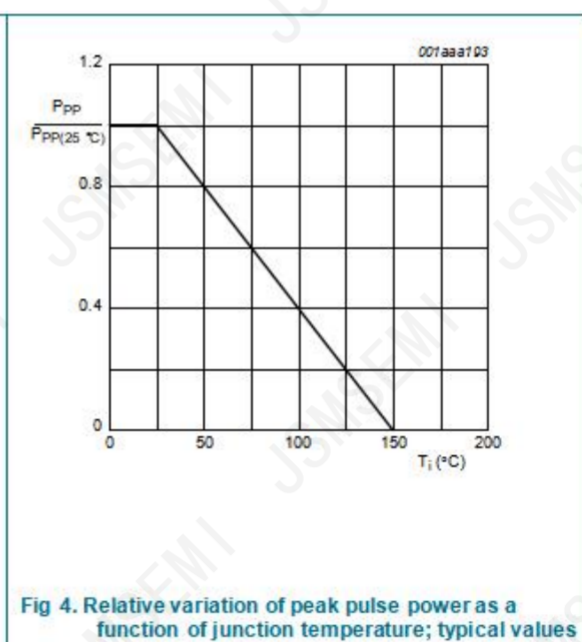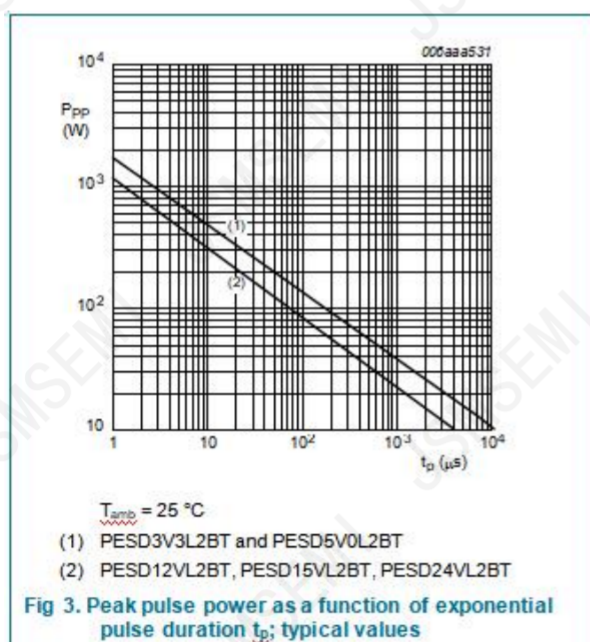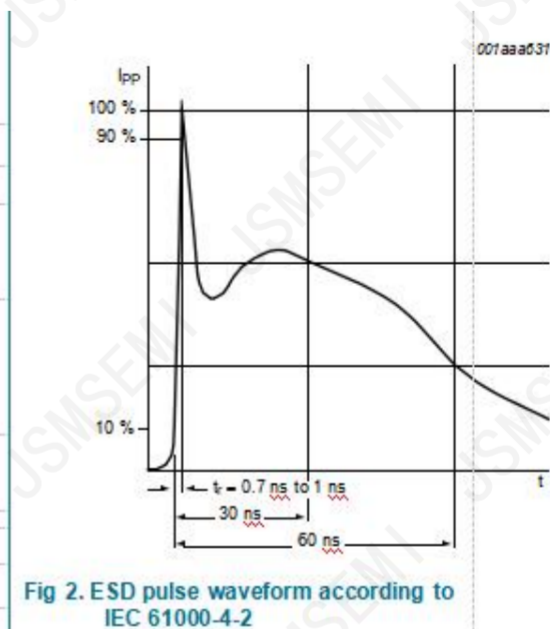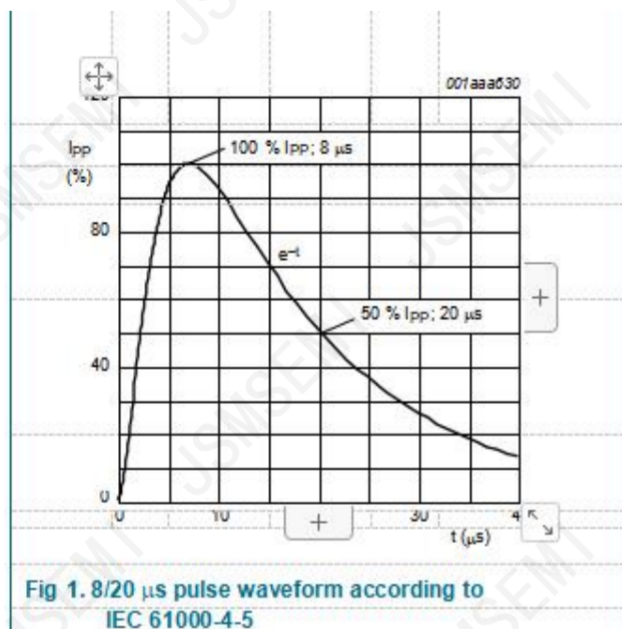

SOT-23 PACKAGE OUTLINE DIMENSIONS



DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.89	1.00	1.11	0.035	0.040	0.044
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.37	0.44	0.50	0.015	0.018	0.020
c	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.90	3.04	0.110	0.114	0.120
E	1.20	1.30	1.40	0.047	0.051	0.055
e	1.78	1.90	2.04	0.070	0.075	0.081
L	0.35	0.54	0.69	0.014	0.021	0.029
HE	2.10	2.40	2.64	0.083	0.094	0.104

Revision History

Rev.	Change	Date
V1.0	Initial version	2/23/2024

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER' S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements diferent from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or s ervice. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com