

1.Description

The LMT8x are a series of analog temperature sensors with negative temperature coefficients that provide an analog voltage output which is linearly proportional to the Celsius temperature. The LMT8X performs factory calibration, so no external calibration is required, with a typical accuracy of $\pm 0.4^{\circ}\text{C}$ at $+25^{\circ}\text{C}$ and a maximum accuracy of $\pm 2.7^{\circ}\text{C}$ in the temperature range from 40°C to $+125^{\circ}\text{C}$.

The LMT8x (the LMT8x series only include these four models) feature low-output impedance, linear output, and factory calibration, enabling significant simplification of temperature control circuits and ADC requirements. This series of sensor components can operate with a single power supply ranging from 1.5V to 5.5V. The power supply current is below $10\mu\text{A}$, and the self-heating effect is minimal, with a temperature change of less than 0.1°C in static air.


The LMT8x are available in low-cost 5-pin SOT-23 surface mount, 3-pin TO-92 and 8-pin SOIC and three packages.

2.Features

- The LMT8x are a series of analog temperature sensors with negative temperature coefficients and average sensor gains of $-5.5\text{mV}/^{\circ}\text{C}$, $-8.2\text{mV}/^{\circ}\text{C}$, $-10.9\text{mV}/^{\circ}\text{C}$, $-13.6\text{mV}/^{\circ}\text{C}$.
- Temperature range: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$, up to $+140^{\circ}\text{C}$
- Temperature accuracy: $\pm 0.4^{\circ}\text{C}$ (typ.)
- The output is short-circuit protected
- Power supply voltage: $2.5\text{V} \sim 5.5\text{V}$
- Low quiescent current: less than $10\mu\text{A}$
- Analog temperature sensors compatible with LM20/19 and LM35 package

3.Applications

- Thermal management system
- Temperature control
- Home appliances

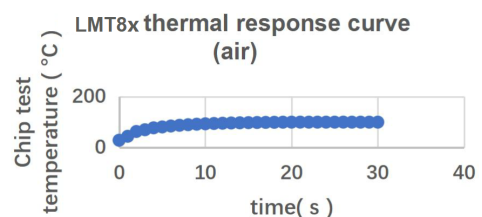

* Where X can represent 4, 5, 6, 7



4.Pinning Information

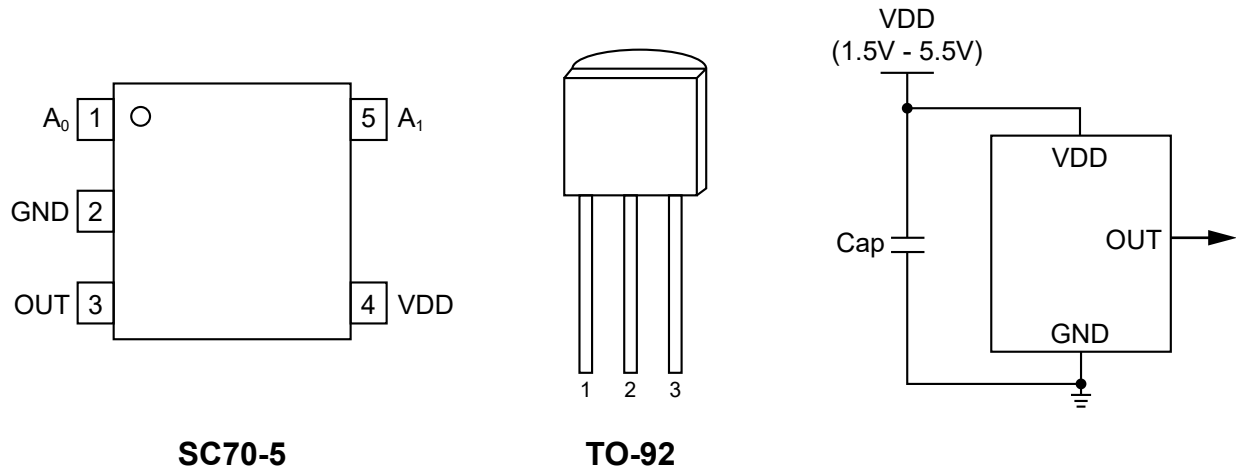


Table 1 Chip pin description

Pin name		Pin name	Description
SOT(SC70)	TO-92		
1	/	A ₀	Chip enable pin 0
2	3	GND	Ground
3	2	OUT	Analog voltage output
4	1	VDD	Chip power supply port
5	/	A ₁	Chip enable pin 1

Table 2 Description of theLMT8x SOT (SC70) package and connections of pin A0 and A1

SOT(SC70)	Chip model and corresponding connection method			
	LMT84	LMT85	LMT86	LMT87
A ₀	GND	VDD	GND	VDD
A ₁	GND	GND	VDD	VDD



5. Absolute Maximum Ratings

Parameter	Min	Max	Units
Power Supply Voltage +Vs		6	V
OUT Pin	GND	VDD+0.4	V
Junction Temperature		150	°C
Storage Temperature	-60	150	°C

6. Electrostatic Protection

		Value	Units
Electrostatic	Human Body Mode (HBM), per ANSI/ESDA/JEDEC JS-001	±4000	V
Discharge Voltage	Machine Mode (MM), per JEDEC-STD Classification	±200	V

7. Recommended Operating Conditions

Parameter	Min	Typ	Max	Units
Supply Voltage (VDD) LMT 84	1.5	3.3	5.5	V
Supply Voltage (VDD) LMT 85	1.8	3.3	5.5	V
Supply Voltage (VDD) LMT 86	2.2	3.3	5.5	V
Supply Voltage (VDD) LMT 87	2.7	3.3	5.5	V
LMT8X Operating Temperature Range (TA)	-50		140	°C

Unless otherwise noted, the specifications in the above table apply within the atmospheric temperature range.



8. Electrical Characteristic

Unless otherwise specified, the following data refer to the characteristics of the chips at +25°C and the power supply voltage is within the corresponding maximum and minimum operating voltage range of each chip. (Typical working conditions are at +25°C and 3.3V.)

Parameter	Conditions	Min	Typ	Max	Units
Supply voltage range	LMT84	1.5		5.5	V
	LMT85	1.8		5.5	V
	LMT86	2.2		5.5	V
	LMT87	2.7		5.5	V
Supply current	Normal operation		5.6	9.3	μA
Temperature range	LMT 8x	-50		140	°C
LMT8X accuracy (temperature error)	+25°C, +V _S =3.3V		±0.4		°C
	-50°C to +140°C, +V _S =3.3V		±1	±2.7	°C
Supply voltage sensitivity	T _A =25°C, 3.0V<+V _S <5.5V		20	100	m°C/V
Scale factor	LMT84		-5.5		mV/°C
	LMT85		-8.2		mV/°C
	LMT86		-10.9		mV/°C
	LMT87		-13.6		mV/°C
Voltage linear regulation rate	LMT8X		200		μV/V
Output load current		-50		50	μA
Capacitive load drive			1100		pF
Device turn-on time	C _L =0pF - 1nF		0.7	2	ms



9. Typical Characteristic

Figure 1: Temperature Error vs Temperature	Figure 2: Operating Temperature vs Minimum Operating Voltage
Figure 3: Operating Current vs Operating Temperature	Figure 4: Operating Current vs Operating Voltage
Figure 5: Current Load Adjustment	Figure 6: Sample test



10.LMT85 Transfer Table

Temp(°C)	V _{OUT} (mV)	Temp(°C)	V _{OUT} (mV)	Temp(°C)	V _{OUT} (mV)	Temp(°C)	V _{OUT} (mV)	Temp(°C)	V _{OUT} (mV)
-50	1955	-10	1648	30	1324	70	991	110	651
-49	1949	-9	1639	31	1316	71	983	111	642
-48	1942	-8	1631	32	1308	72	974	112	634
-47	1935	-7	1623	33	1299	73	966	113	625
-46	1928	-6	1615	34	1291	74	957	114	617
-45	1921	-5	1607	35	1283	75	949	115	608
-44	1915	-4	1599	36	1275	76	941	116	599
-43	1908	-3	1591	37	1267	77	932	117	591
-42	1900	-2	1583	38	1258	78	924	118	582
-41	1892	-1	1575	39	1250	79	915	119	573
-40	1885	0	1567	40	1242	80	907	120	565
-39	1877	1	1559	41	1234	81	898	121	556
-38	1869	2	1551	42	1225	82	890	122	547
-37	1861	3	1543	43	1217	83	881	123	539
-36	1853	4	1535	44	1209	84	873	124	530
-35	1845	5	1527	45	1201	85	865	125	521
-34	1838	6	1519	46	1192	86	856	126	513
-33	1830	7	1511	47	1184	87	848	127	504
-32	1822	8	1502	48	1176	88	839	128	495
-31	1814	9	1494	49	1167	89	831	129	487
-30	1806	10	1486	50	1159	90	822	130	478
-29	1798	11	1478	51	1151	91	814	131	469
-28	1790	12	1470	52	1143	92	805	132	460
-27	1783	13	1462	53	1134	93	797	133	452
-26	1775	14	1454	54	1126	94	788	134	443
-25	1767	15	1446	55	1118	95	779	135	434
-24	1759	16	1438	56	1109	96	771	136	425





Temp(°C)	V _{OUT} (mV)	Temp(°C)	V _{OUT} (mV)	Temp(°C)	V _{OUT} (mV)	Temp(°C)	V _{OUT} (mV)	Temp(°C)	V _{OUT} (mV)
-23	1751	17	1430	57	1101	97	762	137	416
-22	1743	18	1421	58	1093	98	754	138	408
-21	1735	19	1413	59	1084	99	745	139	399
-20	1727	20	1405	60	1076	100	737	140	390
-19	1719	21	1397	61	1067	101	728	141	381
-18	1711	22	1389	62	1059	102	720	142	372
-17	1703	23	1381	63	1051	103	711	143	363
-16	1695	24	1373	64	1042	104	702	144	354
-15	1687	25	1365	65	1034	105	694	145	346
-14	1679	26	1356	66	1025	106	685	146	337
-13	1671	27	1348	67	1017	107	677	147	328
-12	1663	28	1340	68	1008	108	668	148	319
-11	1656	29	1332	69	1000	109	660	149	310
								150	301

Although the LMT85 is very linear, its response does have a slight umbrella parabolic shape. This shape is very accurately reflected in Table 3. The Transfer Table can be calculated by using the parabolic equation (Equation 1).

$$V_{TEMP}(mV) = 1324.0mV - [8.194 \frac{mV}{^{\circ}C} (T - 30^{\circ}C)] - [0.00262 \frac{mV}{^{\circ}C^2} (T - 30^{\circ}C)^2]$$

The parabolic equation is an approximation of the transfer table and the accuracy of the equation degrades slightly at the temperature range extremes. Equation 1 can be solved for T resulting in:

$$T = \frac{8.194 - \sqrt{(8.194)^2 + 4 \times 0.00262 \times (1324 - V_{TEMP}(mV))}}{2 \times -0.00262} + 30$$

For an even less accurate linear transfer function approximation, a line can easily be calculated over the desired temperature range using values from the Table and a two-point equation (Equation 3):

$$V - V_1 = \left(\frac{V_2 - V_1}{T_2 - T_1} \right) \times (T - T_1)$$



where

- V is in mV,
- T is in °C,
- T₁ and V₁ are the coordinates of the lowest temperature,
- and T₂ and V₂ are the coordinates of the highest temperature.

For example, if the user wanted to resolve this equation, over a temperature range of 20°C to 50°C, they would proceed as follows:

$$V-1405\text{mV}=\left(\frac{1159\text{mV}-1405\text{mV}}{50^{\circ}\text{C}-20^{\circ}\text{C}}\right)\times(T-20^{\circ}\text{C}) \quad (4)$$

$$V-1405\text{mV}=(-8.2\text{mV}/^{\circ}\text{C})\times(T-20^{\circ}\text{C}) \quad (5)$$


$$V=(-8.2\text{mV}/^{\circ}\text{C})\times(T+1569\text{mV}) \quad (6)$$

Using this method of linear approximation, the transfer function can be approximated for one or more temperature ranges of interest.



Analog Temperature Sensor with Class
AB Output

11.1 TO-92 Package Outline Dimensions

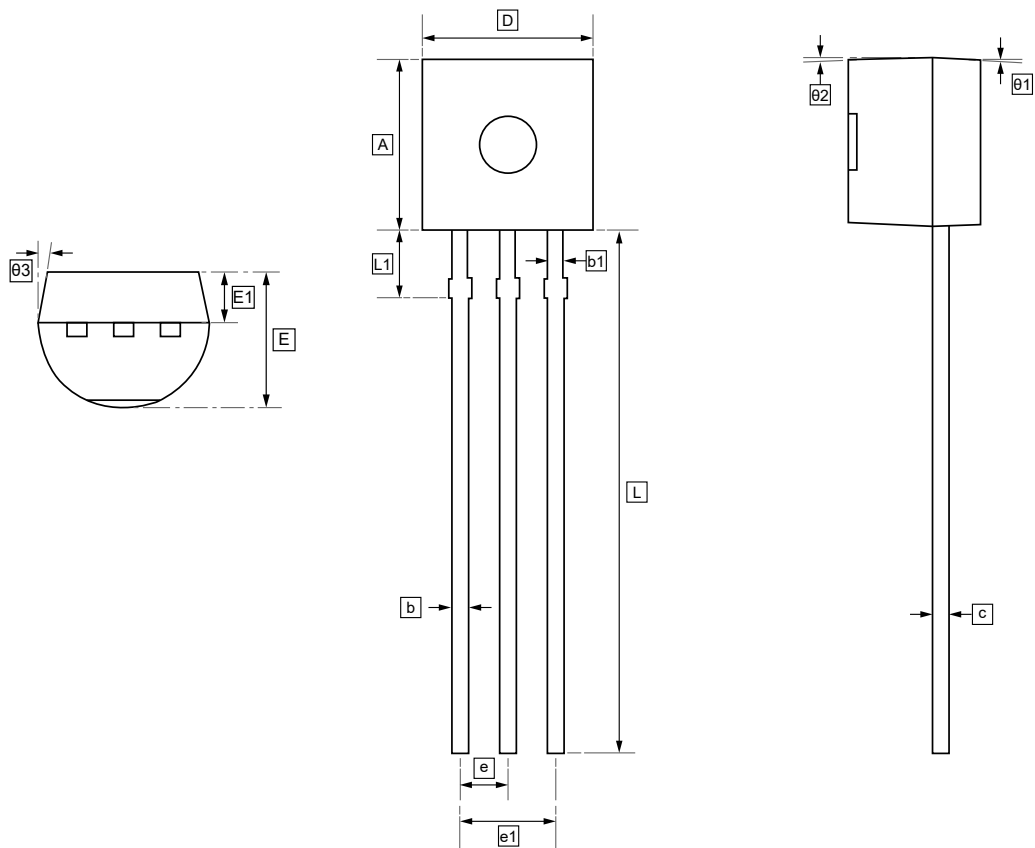


DIMENSIONS (mm are the original dimensions)

Symbol	A	b	b1	c	D	E	E1	e	e1	L	L1	θ1
Min	4.5	0.38	0.46	0.36	4.5	3.45	1.2	1.27	2.54	13.5	1.96	2°
Max	4.7	0.56		0.51	4.7	3.75	1.4			15.3		

Symbol	θ2	θ3
Min	2°	5°
Max		



11.2 SC70-5 Package Outline Dimensions

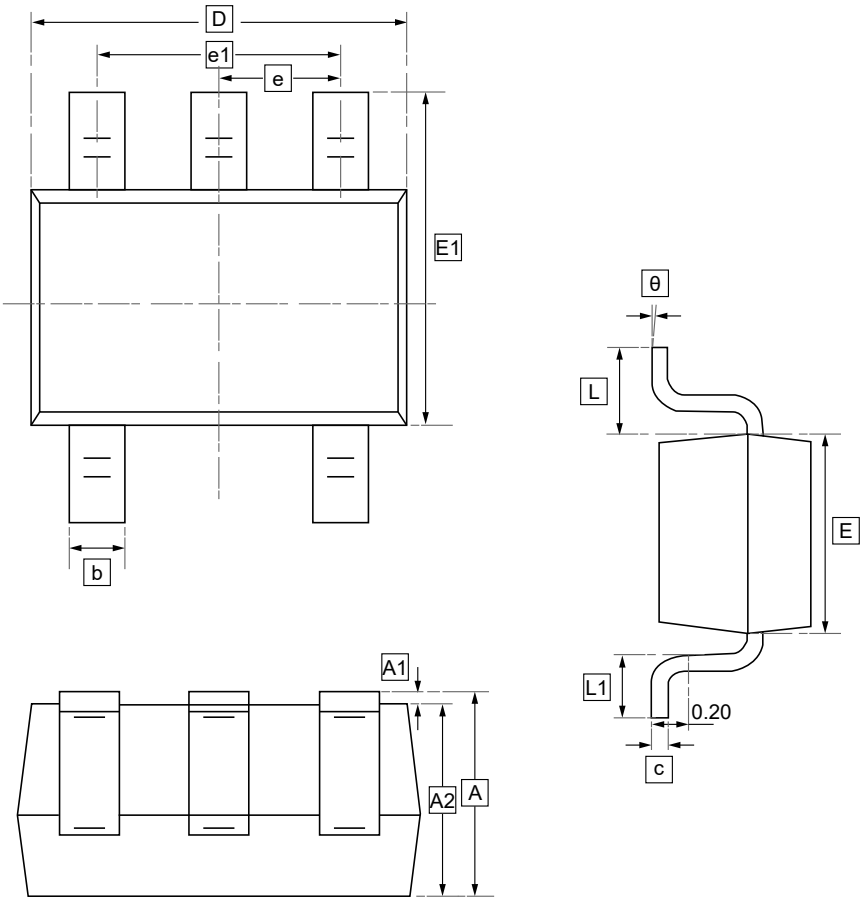


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	e1	L	θ
Min	0.90	0.00	0.90	0.15	0.08	2.05	1.15	2.15	0.65	1.20	0.26	7°
Max	1.10	0.10	1.00	0.35	0.15	2.25	1.35	2.45	TYP	1.40	0.46	REF.



12.Ordering Information

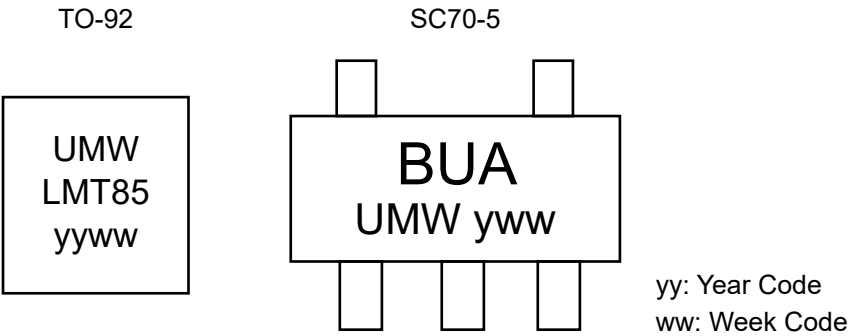

Order Code	Marking	Package	Base QTY	Delivery Mode
UMW LMT84LP	LMT84	TO-92	1800	Tape and reel
UMW LMT85LP	LMT85	TO-92	1000	Tape and reel
UMW LMT86LP	LMT86	TO-92	1800	Tape and reel
UMW LMT87LP	LMT87	TO-92	1800	Tape and reel
UMW LMT84DCKR	BNA	SC70-5	3000	Tape and reel
UMW LMT85DCKR	BPA	SC70-5	3000	Tape and reel
UMW LMT86DCKR	BSA	SC70-5	3000	Tape and reel
UMW LMT87DCKR	BUA	SC70-5	3000	Tape and reel



13.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.