

1.Description

The UMW OPA2330AIDR of CMOS operational amplifiers offer precision performance at a very competitive price. These devices are members simultaneously provide low offset voltage (50- μ V maximum) and near-zero drift over time and temperature at only 35 μ A (maximum) of quiescent current. The UMW OPA330 family features rail-to-rail input and output in addition to near-flat $1/f$ noise making this amplifier ideal for many applications and much easier to design into a system. These devices are optimized for low-voltage operation as low as 1.8V (± 0.9 V) and up to 5.5 V (± 2.75 V).

3.Applications

- Battery-Powered Instruments
- Temperature Measurements
- Transducer Applications
- Electronic Scales


2.Features

- Unmatched Price Performance
- Low Offset Voltage: 50 μ V (Maximum)
- Zero Drift: 0.25 μ V/ $^{\circ}$ C (Maximum)
- Low Noise: 1.1 μ V_{PP}, 0.1 Hz to 10 Hz
- Quiescent Current: 35 μ A (Maximum)
- Supply Voltage: 1.8 V to 5.5 V
- Rail-to-Rail Input and Output
- Internal EMI Filtering

- Medical Instrumentation
- Handheld Test Equipment
- Current Sense




4. Bidirectional, Low-Side Current Sense

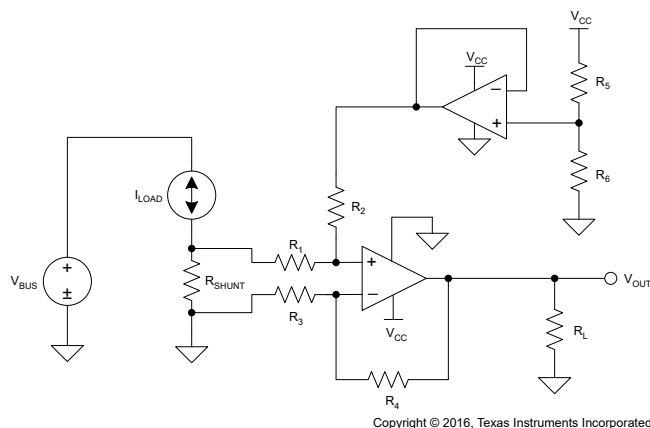

Copyright © 2016, Texas Instruments Incorporated



5.Pinning Information

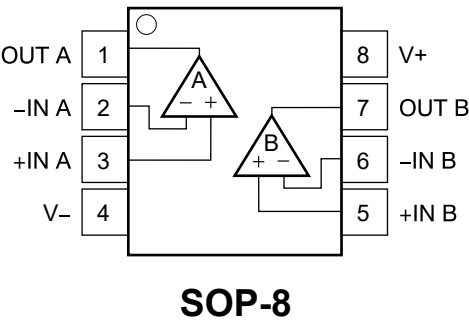

Pin Functions

PIN			I/O	Description
Name	SOP	SON		
-INA	2	2	I	Negative (inverting) input signal, channel A
+INA	3	3	I	Positive (noninverting) input signal, channel A
-INB	6	6	I	Negative (inverting) input signal, channel B
+INB	5	5	I	Positive (noninverting)input signal, channel B
OUTA	1	1	O	Output channel A
OUTB	7	7	O	Output channel B
V-	4	4	-	Negative (lowest) power supply
V+	8	8	-	Positive (highest) power supply



6. Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

Parameter		Symbol	Min	Max	Units
Voltage	Supply, $V_S = (V+) - (V-)$			7	V
	Signal input terminals ⁽²⁾ (TBD should terminal be pin?)		(V-) -0.3	(V+) + 0.3	V
Current	Signal input terminals ⁽²⁾		-10	10	mA
	Output short-circuit ⁽³⁾		Continuous		
Temperature	Operating range	T_A	-40	150	$^{\circ}$ C
	Junction	T_J		150	$^{\circ}$ C
	Storage	T_{STG}	-65	150	$^{\circ}$ C

7. ESD Ratings

Parameter		Symbol	Value	Units
Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	$V_{(ESD)}$	± 4000	V
	Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾		± 4000	V
	Machine model (MM)		± 400	V

8. Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

Parameter	Symbol	Min	Nom	Max	Units
Supply voltage	(V+) - (V-)	± 0.9 (1.8)	± 2.5 (5)	± 2.75 (5.5)	V
Specified temperature	T_A	-40	25	125	$^{\circ}$ C



9.Thermal Information

Parameter	Symbol	(SOP)	Units
		8 Pins	
Junction-to-ambient thermal resistance	$R_{\theta JA}$	124	°C/W
Junction-to-case (top) thermal resistance	$R_{\theta JC(top)}$	73.7	°C/W
Junction-to-board thermal resistance	$R_{\theta JB}$	64.4	°C/W
Junction-to-top characterization parameter	ψ_{JT}	18	°C/W
Junction-to-board characterization parameter	ψ_{JB}	63.9	°C/W
Junction-to-case(bottom)thermal resistance	$R_{\theta JC(bot)}$	-	°C/W



10. Electrical Characteristics

At $T_A=+25^{\circ}\text{C}$, $R_L=10\text{k}\Omega$ connected to $V_S=1.8\text{V}$ to 5.5V , and $V_{CM}=V_{OUT}=\text{mid supply}$ (unless otherwise noted).

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Input offset voltage	V_{OS}	$V_S=5\text{V}$		8	50	μV
Input offset voltage versus temperature	dV_{OS}/dT	At $T_A=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$		0.02	0.25	$\mu\text{V}/^{\circ}\text{C}$
Input offset voltage versus power supply	PSRR	At $T_A=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$		1	10	$\mu\text{V}/\text{V}$
Long-term stability ⁽¹⁾		$V_S=1.8\text{V}$ to 5.5V		See ⁽¹⁾		
Channel separation, dc				0.1		$\mu\text{V}/\text{V}$
Input bias current	I_B	At 25°C		± 200	± 500	pA
		At $T_A=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$		± 300		pA
Input offset current	I_{OS}	At 25°C		± 400	± 1000	pA
Input voltage noise density	e_n	$f=1\text{kHz}$		55		$\text{nV}/\sqrt{\text{Hz}}$
Input voltage noise		$f=0.01\text{Hz}$ to 1Hz		0.3		μV_{PP}
		$f=0.1\text{Hz}$ to 10Hz		1.1		μV_{PP}
Input current noise	i_n	$f=10\text{Hz}$		100		$\text{fA}/\sqrt{\text{Hz}}$
Common-mode voltage range	V_{CM}		(V-) - 0.1		(V+)+0.1	V
Common-mode rejection ratio	CMRR	At $T_A=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ (V-) - 0.1V < V_{CM} < (V+) + 0.1V	100	115		dB
Differential				2		pF
Common-mode				4		pF
Open-loop voltage gain	A_{OL}	At $T_A=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ (V-)+100mV < V_O < (V+) - 100mV $R_L=10\text{k}\Omega$	100	115		dB




Parameter	Symbol	Conditions	Min	Typ	Max	Units
Gain-bandwidth product	GBW	$C_L=100\text{pF}$		350		kHz
Slew rate	SR	$G=+1$		0.16		V/ μ s
Voltage output swing from rail		At $T_A=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$		30	100	mV
Short-circuit current	I_{SC}			± 5		mA
Capacitive load drive	C_L		See Typical Characteristics			
Open-loop output impedance		$f=350\text{ kHz}$, $I_O=0\text{mA}$		2		k Ω
Specified voltage range	V_S		1.8		5.5	V
Quiescent current per amplifier	I_Q	At $T_A=-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, $I_O=0\text{mA}$		21	35	μ A
Turnon time		$V_S=5\text{V}$		100		μ s

(1) 300-hour life test at 150°C demonstrated randomly distributed variation of approximately 1 μ V.



11.1 Typical characteristic

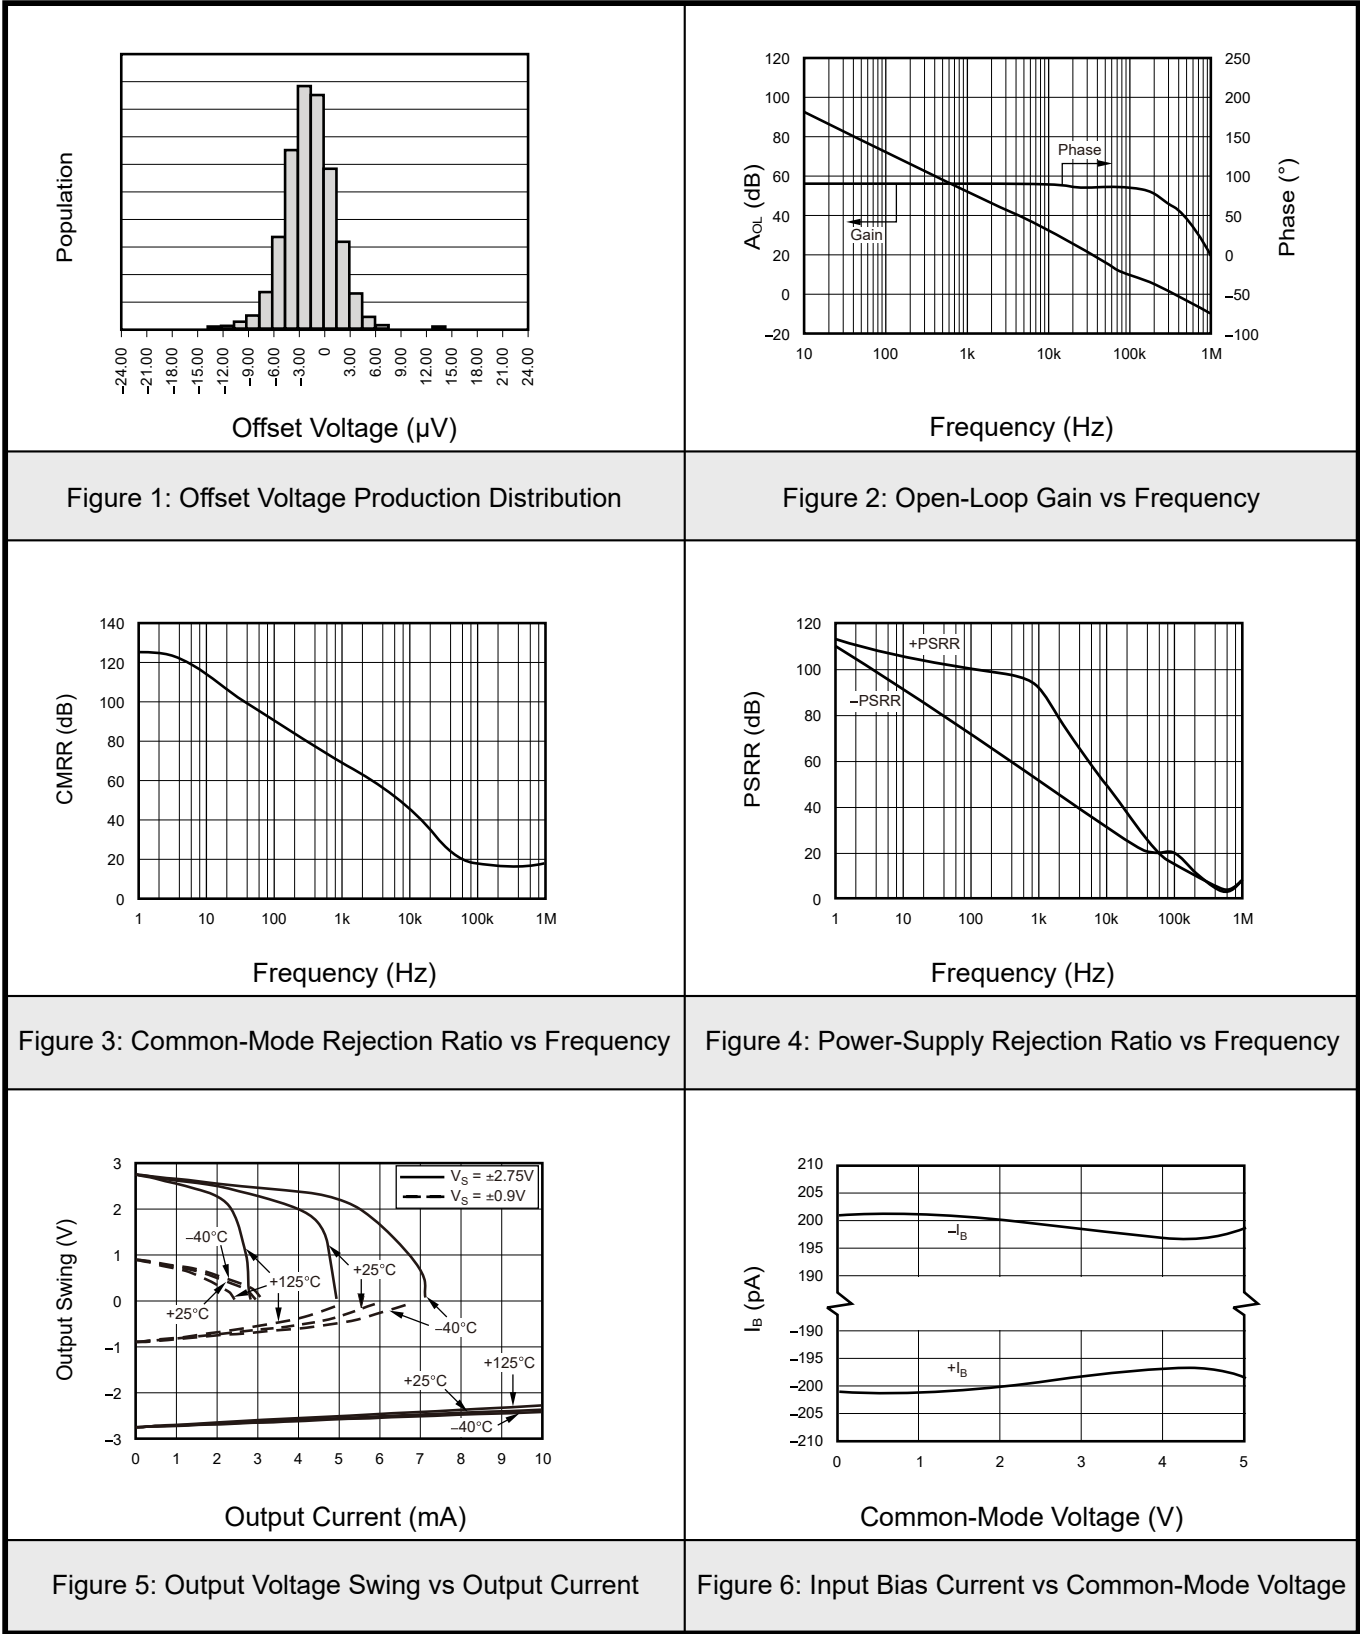








50-μV VOS, 0.25-μV/°C, 35-μA CMOS Operational Amplifiers Zero-Drift Series

11.2 Typical characteristic

Figure 7: Input Bias Current vs Temperature	Figure 8: Quiescent Current vs Temperature
Figure 9: Large-Signal Step Response	Figure 10: Small-Signal Step Response
Figure 11: Positive Overvoltage Recovery	Figure 12: Negative Overvoltage Recovery




11.3 Typical characteristic

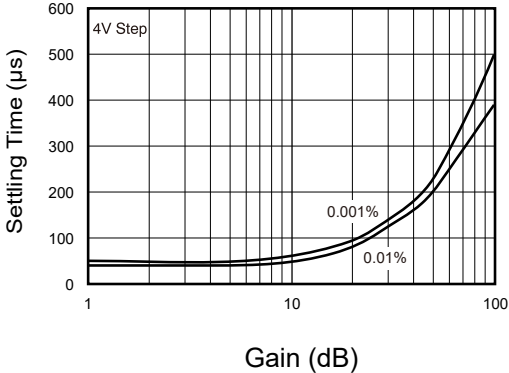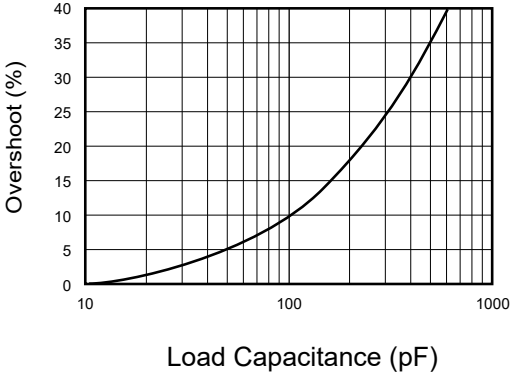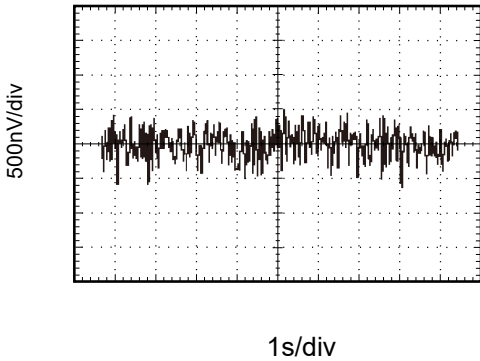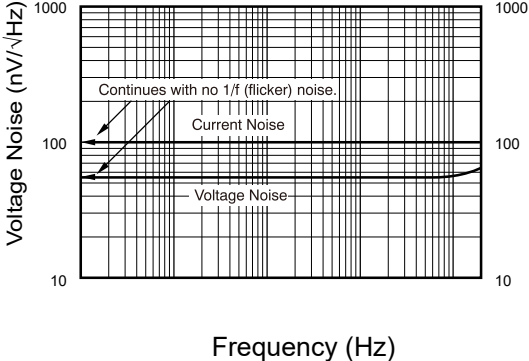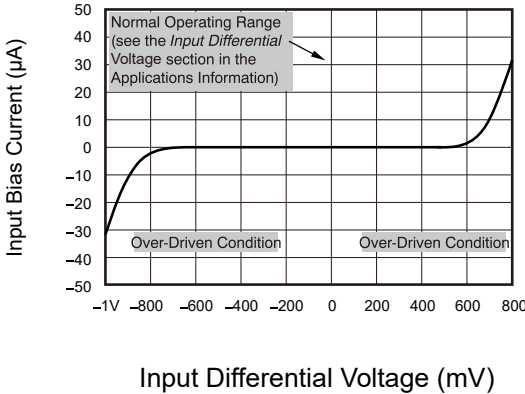	
Figure 13: Settling Time vs Closed-Loop Gain	Figure 14: Small-Signal Overshoot vs Load Capacitance
	
Figure 15: 0.1-Hz to 10-Hz Noise	Figure 16: Current and Voltage Noise Spectral Density vs Frequency
	
Figure 17: Input Bias Current vs Input Differential Voltage	



50-μV VOS, 0.25-μV/°C, 35-μA CMOS Operational Amplifiers Zero-Drift Series

12.SOP-8 Package Outline Dimensions

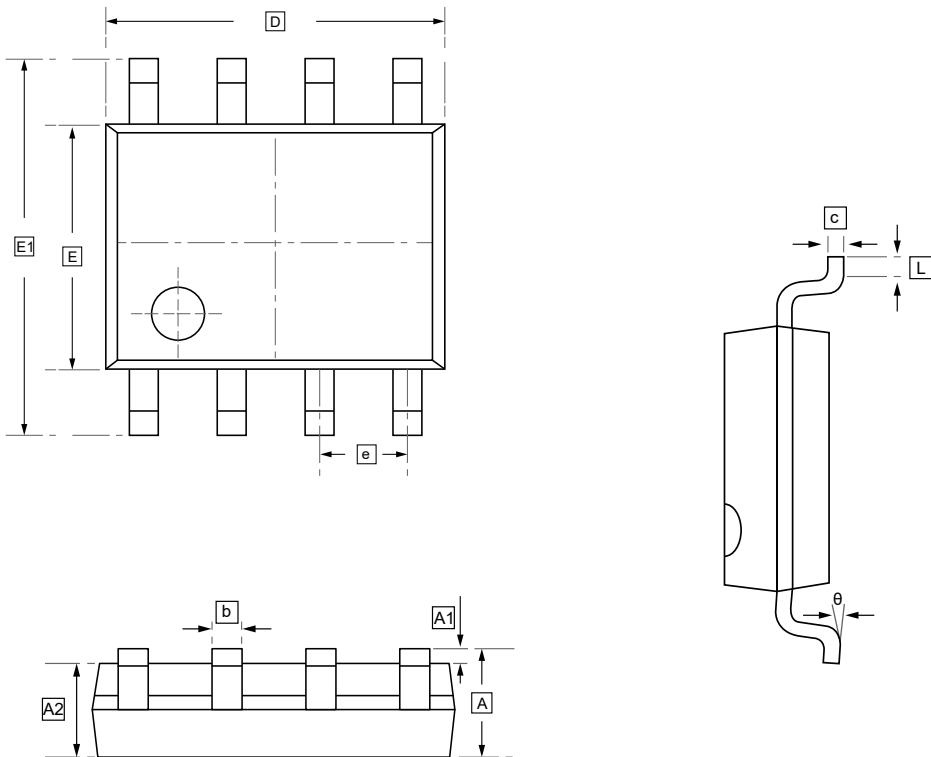


DIMENSIONS (mm are the original dimensions)

Symbol	A	A1	A2	b	c	D	E	E1	e	L	θ
Min	1.350	0.000	1.350	0.330	0.170	4.700	3.800	5.800	1.270	0.400	0°
Max	1.750	0.100	1.550	0.510	0.250	5.100	4.000	6.200	BSC	1.270	8°



50-μV VOS, 0.25-μV/°C, 35-μA CMOS Operational
Amplifiers Zero-Drift Series

13.Ordering information



yy: Year Code
ww: Week Code

Order Code	Package	Base QTY	Delivery Mode
UMW OPA2330AIDR	SOP-8	2500	Tape and reel



14.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.