

1.Features

PESD1LIN in a very small SOD323 Surface-Mounted Device (SMD) plastic package designed to protect one automotive Local Interconnect Network (LIN) bus line from the damage caused by ElectroStatic Discharge (ESD) and other transients.

3.Features and benefits

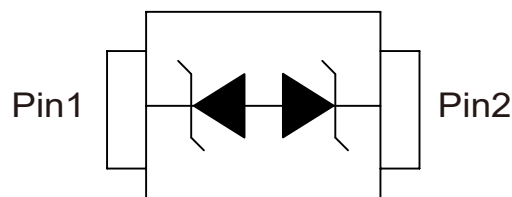
- ESD protection of one automotive LIN-bus line
- Asymmetrical diode configuration ensures an optimized protection against ElectroMagnetic Interferences (EMI) of a LIN Electronic Control Unit (ECU)
- Max. peak pulse power: $PPP = 160\text{ W}$ at $t_p=8/20\mu\text{s}$

2.Applications

- LIN-bus protection
- Automotive applications

- Low clamping voltage: $V_{CL}=40\text{V}$ at $I_{PP}=1\text{A}$
- Ultra low leakage current: $I_{RM} < 1\text{nA}$
- ESD protection of up to 23 kV
- IEC 61000-4-2, level 4 (ESD)
- IEC 61000-4-5 (surge); $I_{PP}=3\text{A}$ at $t_p=8/20\mu\text{s}$

4.Pinning information



SOD-323



5. Quick reference data

$T_{amb}=25^{\circ}\text{C}$ unless otherwise specified.

Parameter	Symbol	Conditions	Min	Typ	Max	Units
reverse standoff voltage	V_{RWM}					
PESD1LIN (PIN1 TO PIN2, 15V)					15	V
PESD1LIN (PIN2 TO PIN1, 24 V)					24	V
diode capacitance	C_d	$V_R=0\text{V}$, $f=1\text{MHz}$		13	17	pF

6. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Parameter	Symbol	Conditions	Min	Typ	Max	Units
peak pulse power	P_{PP}	$t_p=8/20\mu\text{s}$ ①			160	W
peak pulse current	I_{PP}	$t_p=8/20\mu\text{s}$ ①			3	A
junction temperature	T_J				150	$^{\circ}\text{C}$
ambient temperature	T_{amb}		-65		150	$^{\circ}\text{C}$
storage temperature	T_{STG}		-65		150	$^{\circ}\text{C}$

Notes:

① Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC 61000-4-5.



7.ESD maximum ratings

Parameter	Symbol	Conditions	Min	Typ	Max	Units
electrostatic discharge voltage	V_{ESD}	IEC 61000-4-2 (contact discharge) ①			23	kV
		MIL-STD-883 (human body model)			10	kV

Notes:

① Device stressed with ten non-repetitive ESD pulses.

8.ESD standards compliance

Parameter	Conditions
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4 kV



9. Electrical Characteristic ($T_A=25^{\circ}\text{C}$ unless otherwise noted)







Parameter	Symbol	Conditions	Min	Typ	Max	Units
reverse standoff voltage	V _{RWM}					
PESD1LIN (PIN1 TO PIN2, 15V)				15	V	
PESD1LIN (PIN2 TO PIN1, 24V)				24	V	
reverse leakage current	I _{RM}					
PESD1LIN (PIN1 TO PIN2, 15V)		V _{RWM} =15V		<1	50	nA
PESD1LIN (PIN2 TO PIN1, 24V)		V _{RWM} =24V		<1	50	nA
breakdown voltage	V _{BR}	I _R =5mA				
PESD1LIN (PIN1 TO PIN2, 15V)			17.1	18.9	20.3	V
PESD1LIN (PIN2 TO PIN1, 24V)			25.4	27.8	30.3	V
diode capacitance	C _d	V _R =0V, f=1MHz		13	17	pF
clamping voltage	V _{CL}	①				
PESD1LIN (PIN1 TO PIN2, 15V)		I _{PP} =1A			25	V
		I _{PP} =5A			44	V
PESD1LIN (PIN2 TO PIN1, 24V)		I _{PP} =1A			40	V
		I _{PP} =3A			70	V
differential resistance	r _{dif}					
PESD1LIN (PIN1 TO PIN2, 15V)		I _R =1mA			225	Ω
PESD1LIN (PIN2 TO PIN1, 24V)		I _R =1mA			300	Ω

Notes:

① Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC 61000-4-5.




10.1Typical characteristic

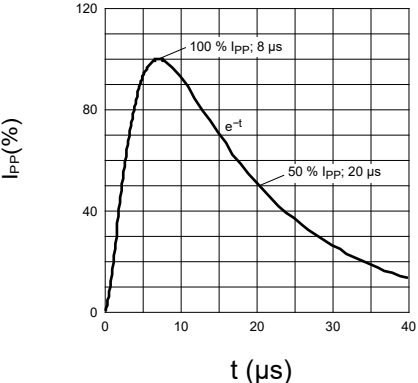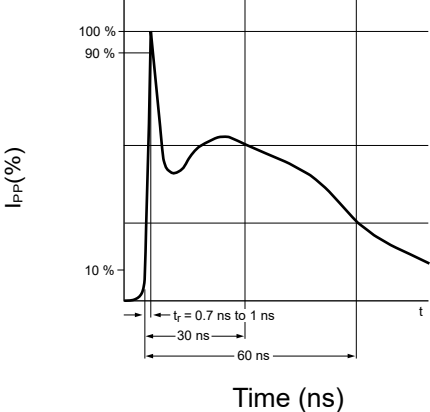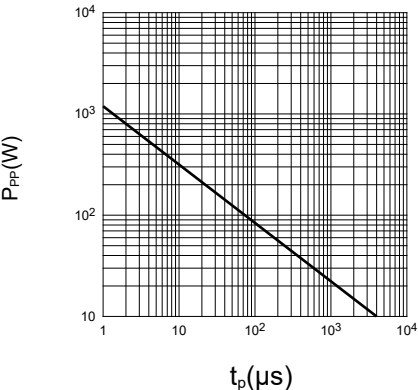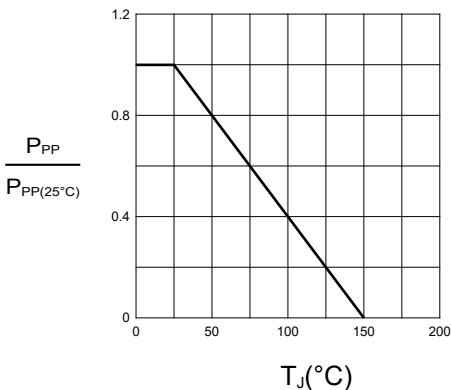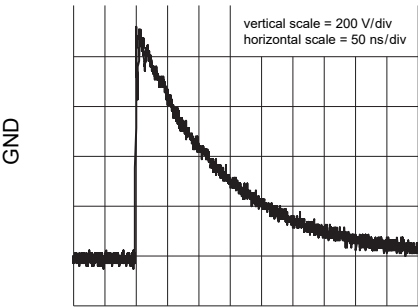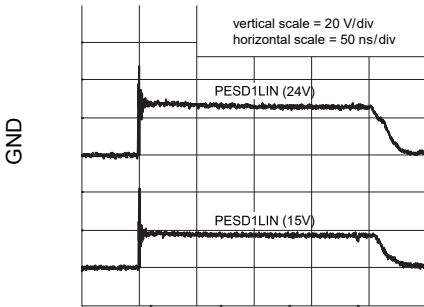	
Figure 1: 8/20 μs pulse waveform according to IEC 61000-4-5	Figure 2: ESD pulse waveform according to IEC 61000-4-2
	
Figure 3: Peak pulse power as a function of exponential pulseduration; typical values	Figure 4: Relative variation of peak pulse power as a function of junction temperature; typical values
	
Figure 5: unclamped +1 kV ESD voltage waveform (IEC 61000-4-2 network)	Figure 6: clamped +1 kV ESD voltage waveform (IEC 61000-4-2 network)



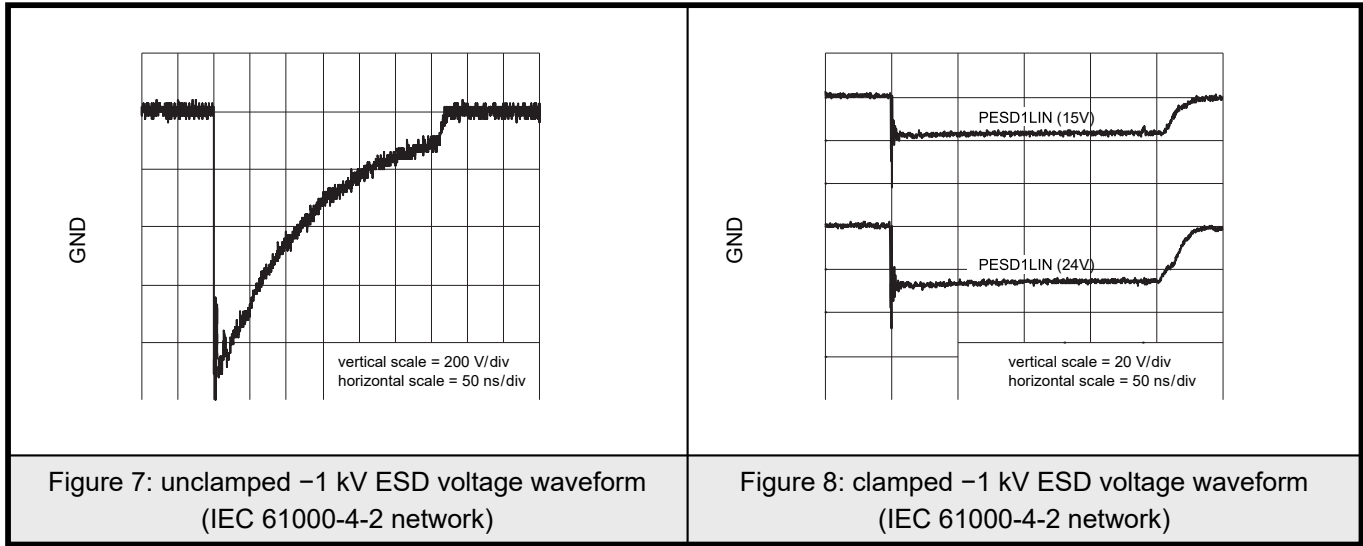10.2Typical characteristic





11.Application information

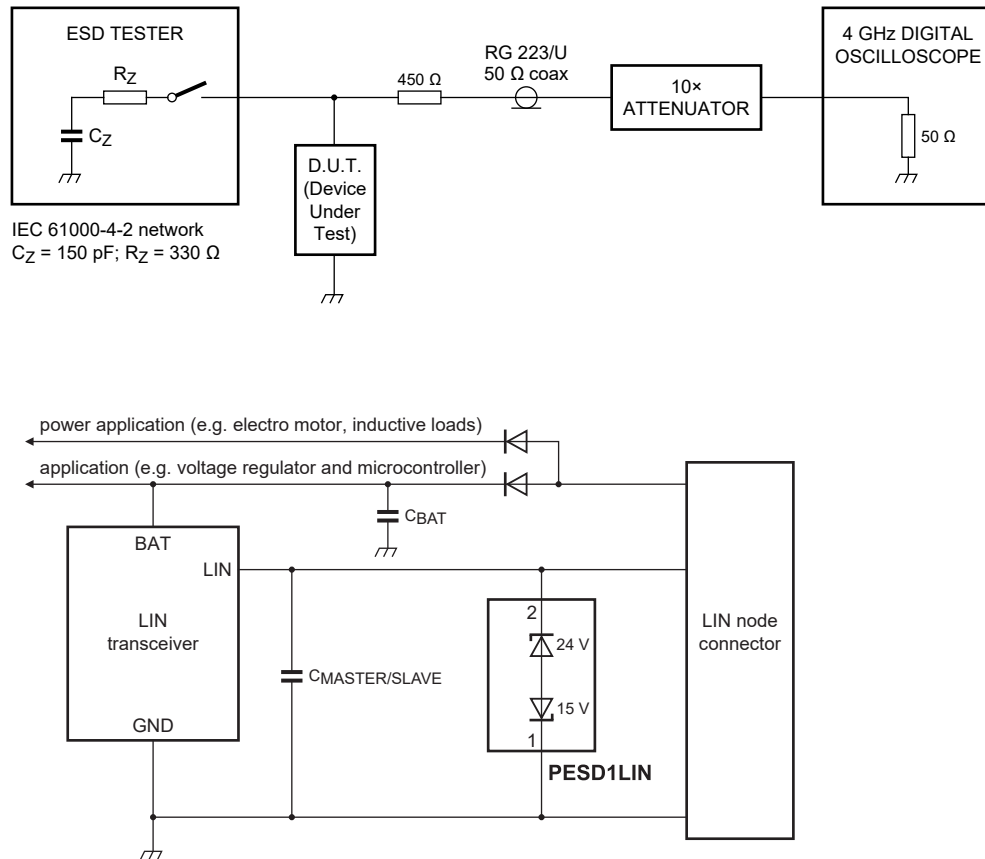


Figure 8: Typical application: ESD protection of one automotive LIN-bus line

The PESD1LIN is designed for the protection of one LIN-bus signal line from the damage caused by ESD and surge pulses. The PESD1LIN provides a surge capability of up to 160 W per line for a 8/20 μ s waveform.



Circuit board layout and protection device placement

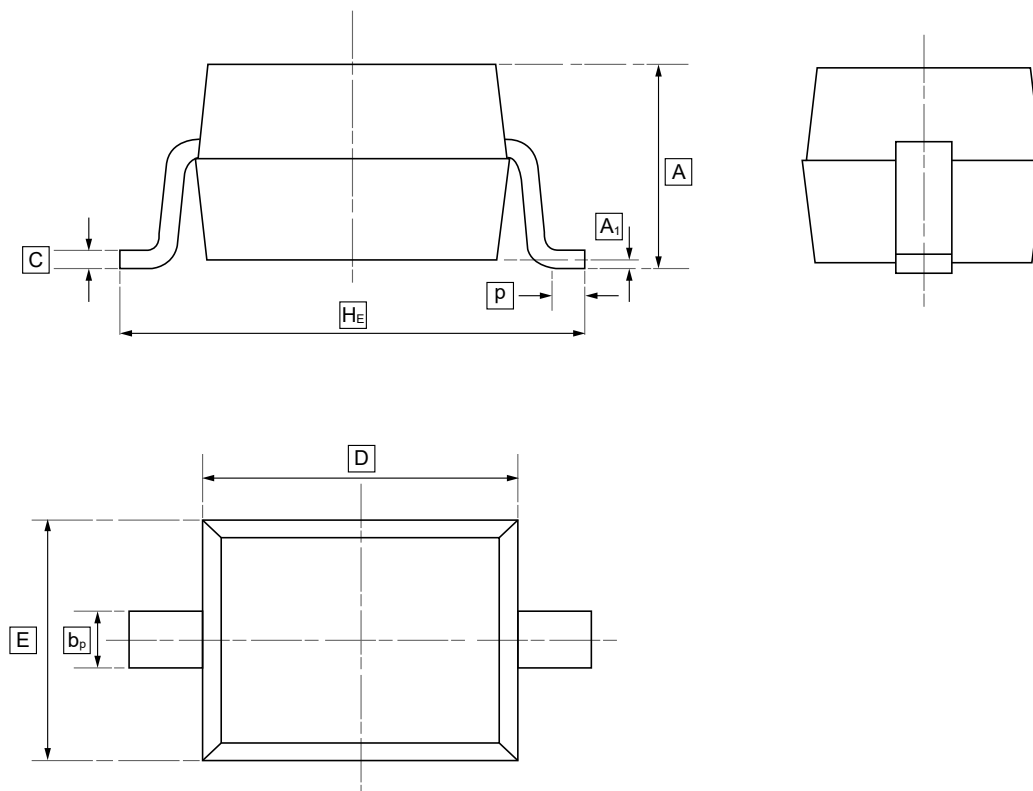
Circuit board layout is critical for the suppression of ESD, Electrical Fast Transient (EFT) and surge transients.

The following guidelines are recommended:

1. Place the PESD1LIN as close to the input terminal or connector as possible.
2. The path length between the PESD1LIN and the protected line should be minimized.
3. Keep parallel signal paths to a minimum.
4. Avoid running protection conductors in parallel with unprotected conductor.
5. Minimize all Printed-Circuit Board (PCB) conductive loops including power and ground loops.
6. Minimize the length of the transient return path to ground.
7. Avoid using shared transient return paths to a common ground point.
8. Ground planes should be used whenever possible. For multilayer PCBs, use ground vias.



12.SOD-323 Package Outline Dimensions




DIMENSIONS (mm are the original dimensions)

Symbol	A	b_p	C	D	E	H_E	A_1	p
Min	0.90	0.25	0.10	1.60	1.15	2.30	0.01	0.20
Max	1.20	0.40	0.15	1.80	1.35	2.80	0.10	0.50



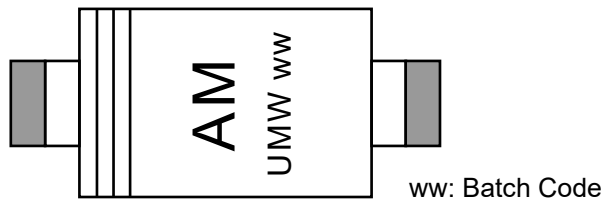13.Ordering information



Order Code	Package	Base QTY	Delivery Mode
UMW PESD1LIN	SOD-323	3000	Tape and reel



14.Disclaimer

UMW reserves the right to make changes to all products, specifications. Customers should obtain the latest version of product documentation and verify the completeness and currency of the information before placing an order.

When applying our products, please do not exceed the maximum rated values, as this may affect the reliability of the entire system. Under certain conditions, any semiconductor product may experience faults or failures. Buyers are responsible for adhering to safety standards and implementing safety measures during system design, prototyping, and manufacturing when using our products to prevent potential failure risks that could lead to personal injury or property damage.

Unless explicitly stated in writing, UMW products are not intended for use in medical, life-saving, or life-sustaining applications, nor for any other applications where product failure could result in personal injury or death. If customers use or sell the product for such applications without explicit authorization, they assume all associated risks.

When reselling, applying, or exporting, please comply with export control laws and regulations of China, the United States, the United Kingdom, the European Union, and other relevant countries, regions, and international organizations.

This document and any actions by UMW do not grant any intellectual property rights, whether express or implied, by estoppel or otherwise. The product names and marks mentioned herein may be trademarks of their respective owners.