

General Description

The TPNCP161 is a low-dropout (LDO) voltage regulator with enable function that operates from a 1.2V to 5.5V supply. It provides up to 450mA of output current in miniaturized packaging.

The feature of 25 μ A low quiescent current and 0.5 μ A shutdown current are ideal for the battery application with long service life. The other features include current limit function, over temperature protection and output discharge function.

Features

- 25 μ A Ground Current at no Load
- $\pm 2\%$ Output Accuracy
- 450mA Output Current
- 10nA Disable Current (by option)
- Wide Operating Input Voltage Range: 1.2V to 5.5V
- Dropout Voltage: 0.32V at 450mA ($V_{OUT}=3.3V$)
- Support Fixed Output Voltage 1.2V, 1.5V, 1.6V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V, 3.6V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over-Temperature Protection
- SOT23 -5, DFN-1X1-4

Applications

- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment


Ordering Information

TPNCP161ASN330T1G

Output voltage: 120=1.2V
150=1.5V
180=1.8V
300=3.0V
330=3.3V
360=3.6V


ASN:SOT23-5 Package
AMX:DFN1X1-4L Package

BLOCK DIAGRAM

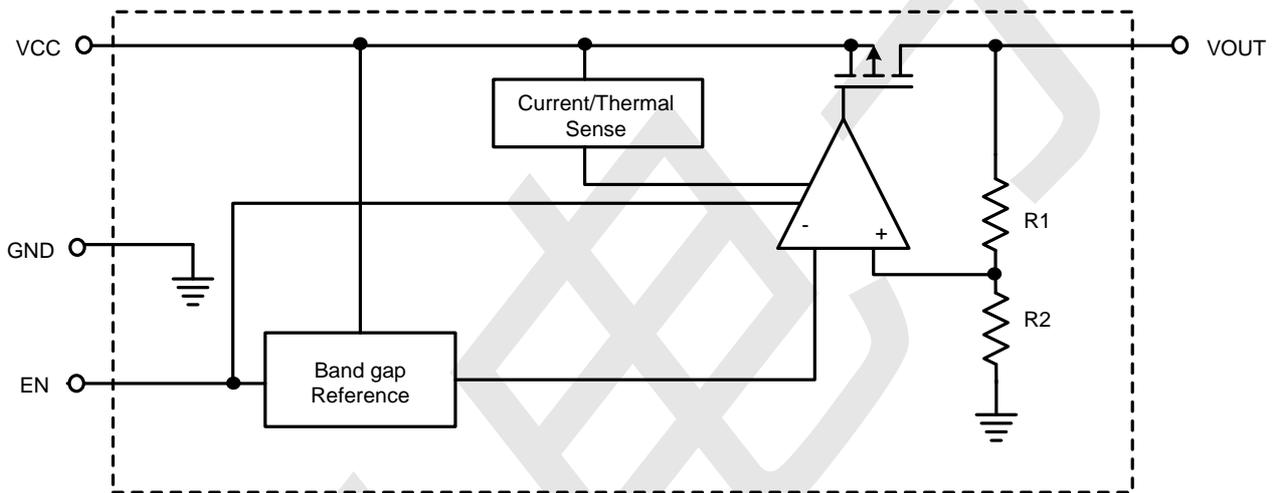


PIN CONFIGURATION

SOT-23-5



DFN-4L 1x1



Absolute Maximum Rating ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

| | |
|---|---------------|
| VIN Pin to GND Pin Voltage | -0.3V to 6.5V |
| VOUT Pin and EN Pin to GND Pin Voltage | -0.3V to 6V |
| VOUT Pin to VIN Pin Voltage | -6V to 0.3V |
| Storage Temperature Range | -60°C~150°C |
| Lead Temperature (Soldering, 10 sec) | 260°C |
| Junction Temperature | 150°C |
| Operating Ambient Temperature Range T_A | -40°C~85°C |
| Thermal Resistance Junction to Case, $R_{\theta JC}$ | |
| SOT23-3 | 115°C/W |
| SOT23-5 | 115°C/W |
| DFN-4(1x1) | 65°C/W |
| DFN-6(2x2) | 30°C/W |
| Thermal Resistance Junction to Ambient, $R_{\theta JA}$ | |
| SOT23-3 | 250°C/W |
| SOT23-5 | 250°C/W |
| DFN-4(1x1) | 195°C/W |
| DFN-6(2x2) | 165°C/W |

Electrical Characteristics (T =25°C unless otherwise noted)

(V_{IN}=5V, V_{EN}=5V, T_A=25°C, unless otherwise specified) (Note 1)

| PARAMETER | TEST CONDITIONS | SYMBOL | MIN. | TYP. | MAX. | UNIT |
|---|--|------------------------|------|------|------|-------------------|
| Supply Voltage | | V _{IN} | 1.2 | | 5.5 | V |
| DC Output Voltage Accuracy | I _{LOAD} =0.1mA | | -2 | | 2 | % |
| SNS Input Current | SNS=V _{OUT} | I _{SNS} | | 0.5 | | μA |
| Dropout Voltage (Note 2) | I _{LOAD} =300mA, V _{OUT} ≥3V | V _{DROP_3V} | | 0.18 | | V |
| | I _{LOAD} =300mA, V _{OUT} =2.8V | V _{DROP_2.8V} | | 0.23 | | |
| | I _{LOAD} =300mA, V _{OUT} =2.5V | V _{DROP_2.5V} | | 0.23 | | |
| | I _{LOAD} =300mA, V _{OUT} =1.8V | V _{DROP_1.8V} | | 0.28 | | |
| | I _{LOAD} =300mA, V _{OUT} =1.5V | V _{DROP_1.5V} | | 0.36 | | |
| | I _{LOAD} =300mA, V _{OUT} =1.2V | V _{DROP_1.2V} | | 0.45 | | |
| GND Current | I _{LOAD} =0mA | I _Q | | | 25 | μA |
| Shutdown GND Current | V _{EN} =0V, V _{OUT} =0V | I _{SD} | | 0.1 | 0.5 | μA |
| V _{OUT} Shutdown Leakage Current | V _{EN} =0V, V _{OUT} =0V | I _{LEAK} | | 0.1 | 0.5 | μA |
| Enable Threshold Voltage | EN Rising | V _{IH} | 1.0 | | | V |
| | EN Falling | V _{IL} | | | 0.4 | |
| EN Input Current | V _{EN} =5V | I _{EN} | | 10 | 100 | nA |
| Line Regulation | I _{LOAD} =30mA, 1.5V≤V _{IN} ≤5.5V or (V _{OUT} +0.2V)≤V _{IN} ≤5.5V | ΔLINE | | 0.2 | | % |
| Load Regulation | 10mA≤I _{LOAD} ≤300mA | ΔLOAD | | 0.2 | | % |
| Output Current Limit | V _{OUT} =0V | I _{LIM} | 450 | 500 | | mA |
| Power Supply Rejection Ratio | V _{OUT} =1.2V, I _{LOAD} =5mA, V _{IN} =2V, f=100Hz | PSRR | | 80 | | dB |
| | V _{OUT} =1.2V, I _{LOAD} =5mA, V _{IN} =2V, f=1kHz | | | 75 | | |
| Output Voltage Noise | V _{IN} =3.5V, I _{LOAD} =0.1A, BW=10Hz to 100kHz, C _{OUT} =1μF, V _{OUT} =1.2V | | | 80 | | μV _{RMS} |
| | V _{IN} =3.5V, I _{LOAD} =0.1A, BW=10Hz to 100kHz, C _{OUT} =1μF, V _{OUT} =2.8V | | | 120 | | |
| Thermal Shutdown Temperature | I _{LOAD} =10mA | T _{SD} | | 155 | | °C |
| Thermal Shutdown Hysteresis | I _{LOAD} =10mA | ΔT _{SD} | | 15 | | °C |
| Discharge Resistance | V _{EN} =0V, V _{OUT} =0.1V | | | 100 | | Ω |

TYPICAL APPLICATION











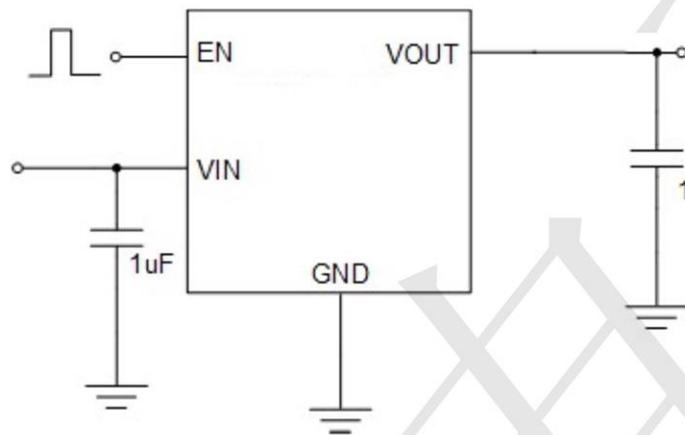


Figure 2: Application circuit of Fixed V_{OUT} LDO with enable function

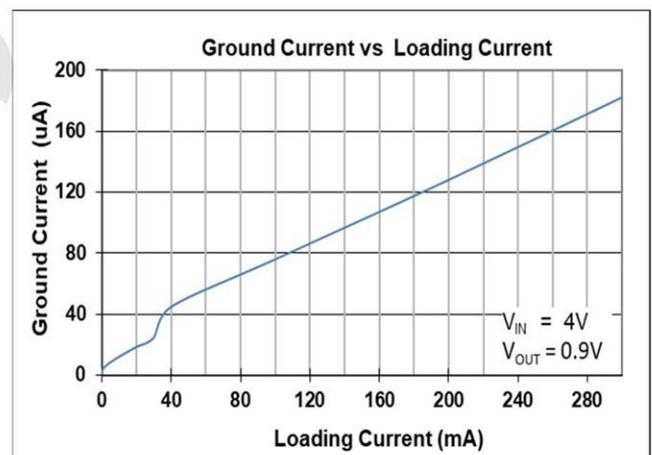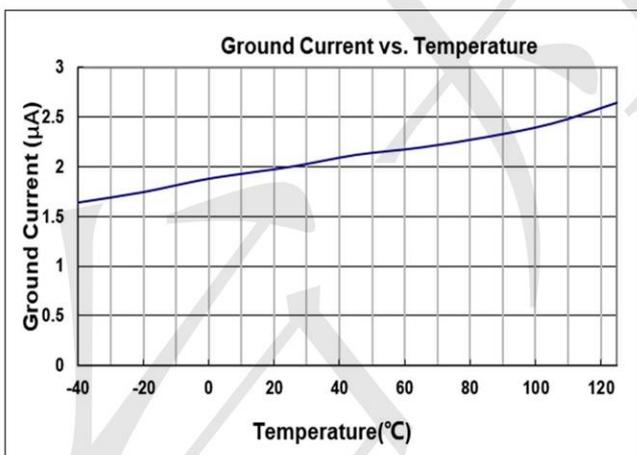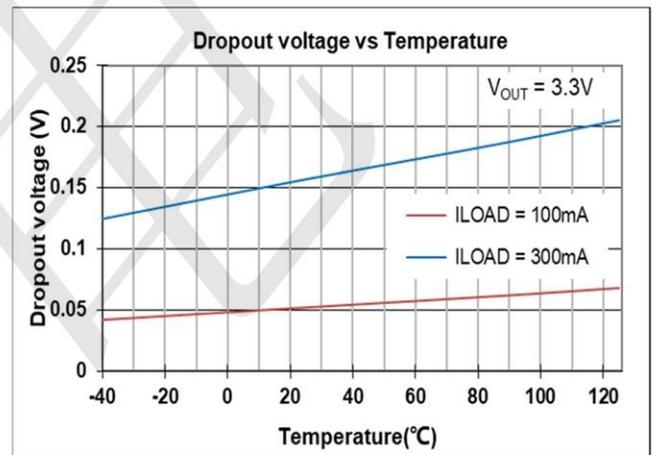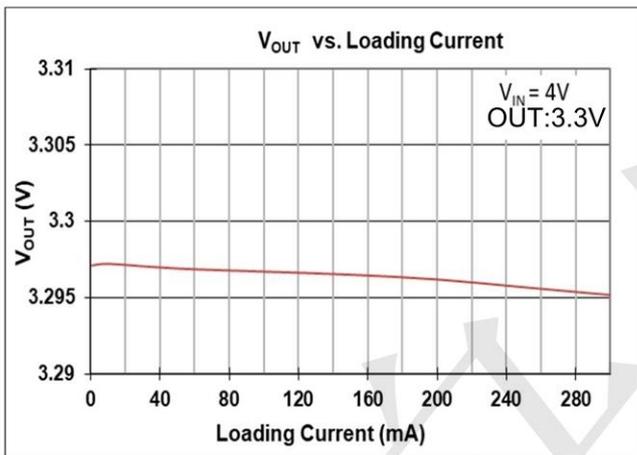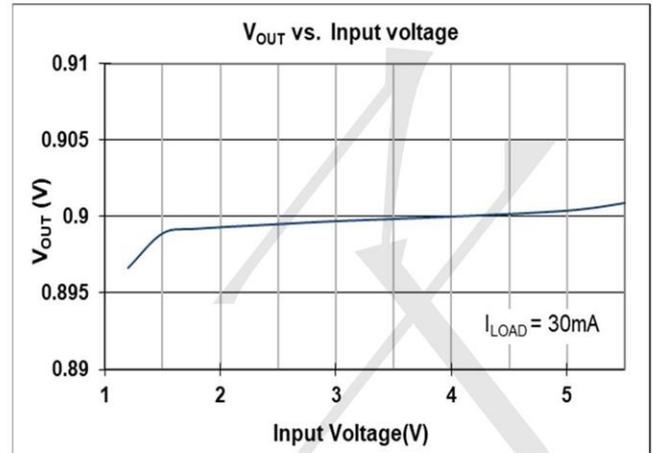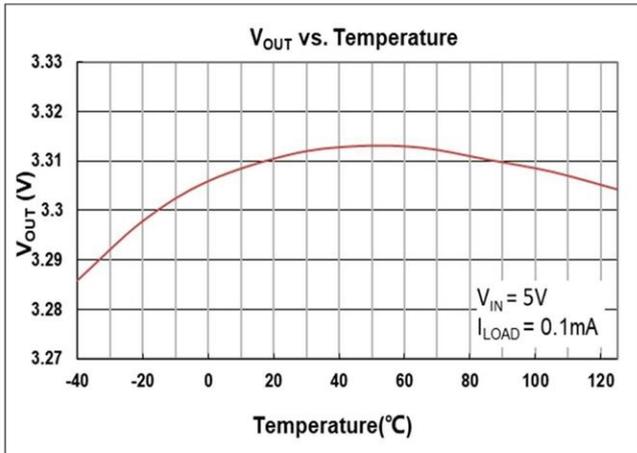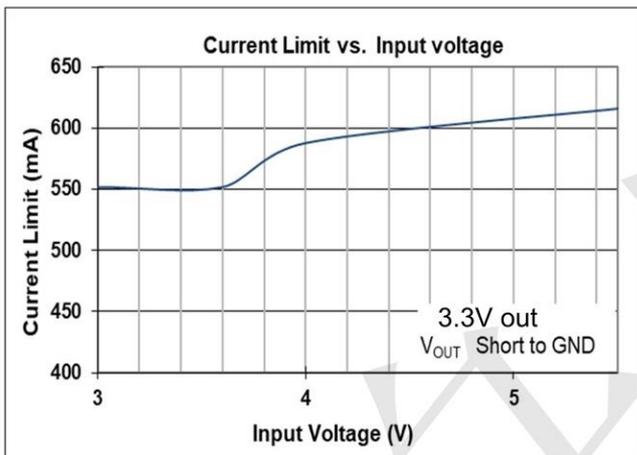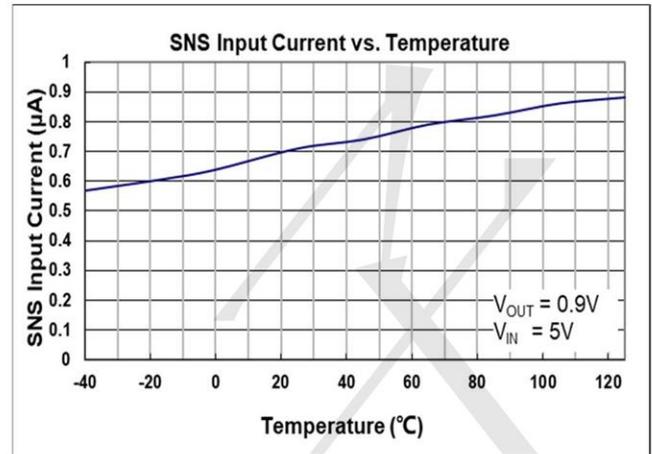


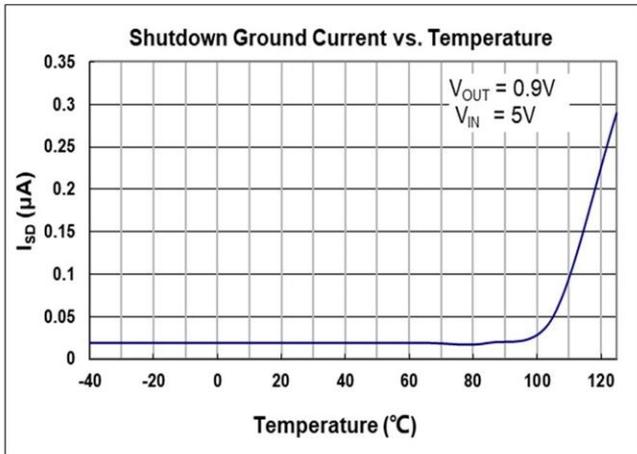


Current Limit Response

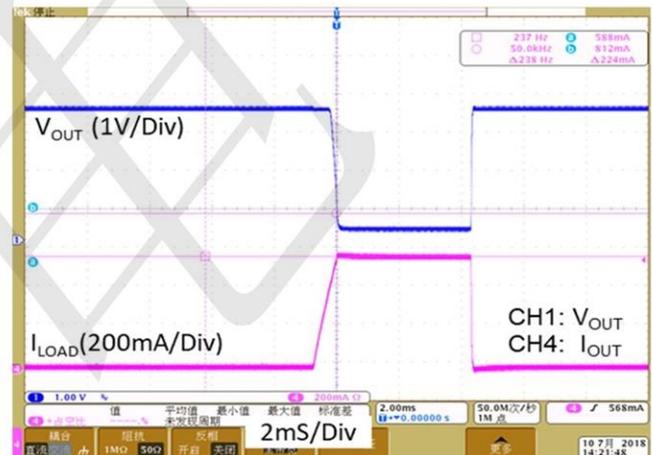


Load Transient Response I

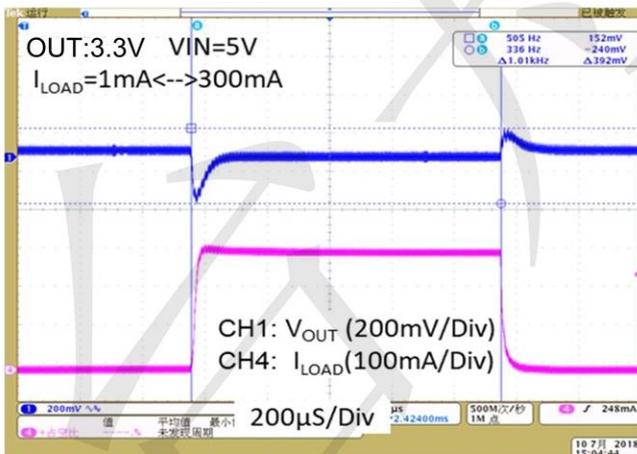


Load Transient Response II

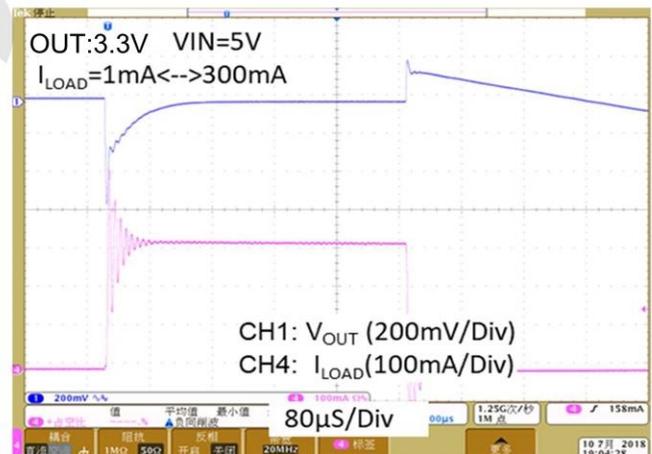

Line Transient Response

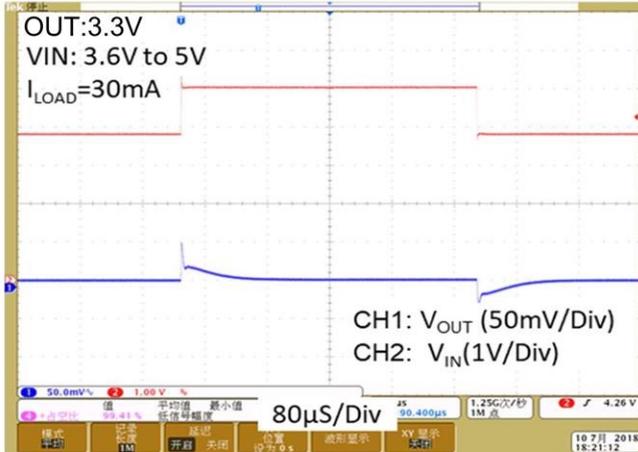


V_{OUT} Turn On/Off by EN

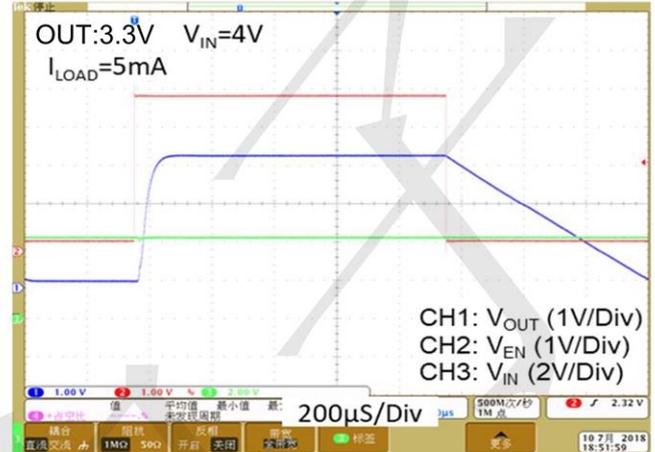

Package informantion


4-pin DFN-4L Outline Dimensions

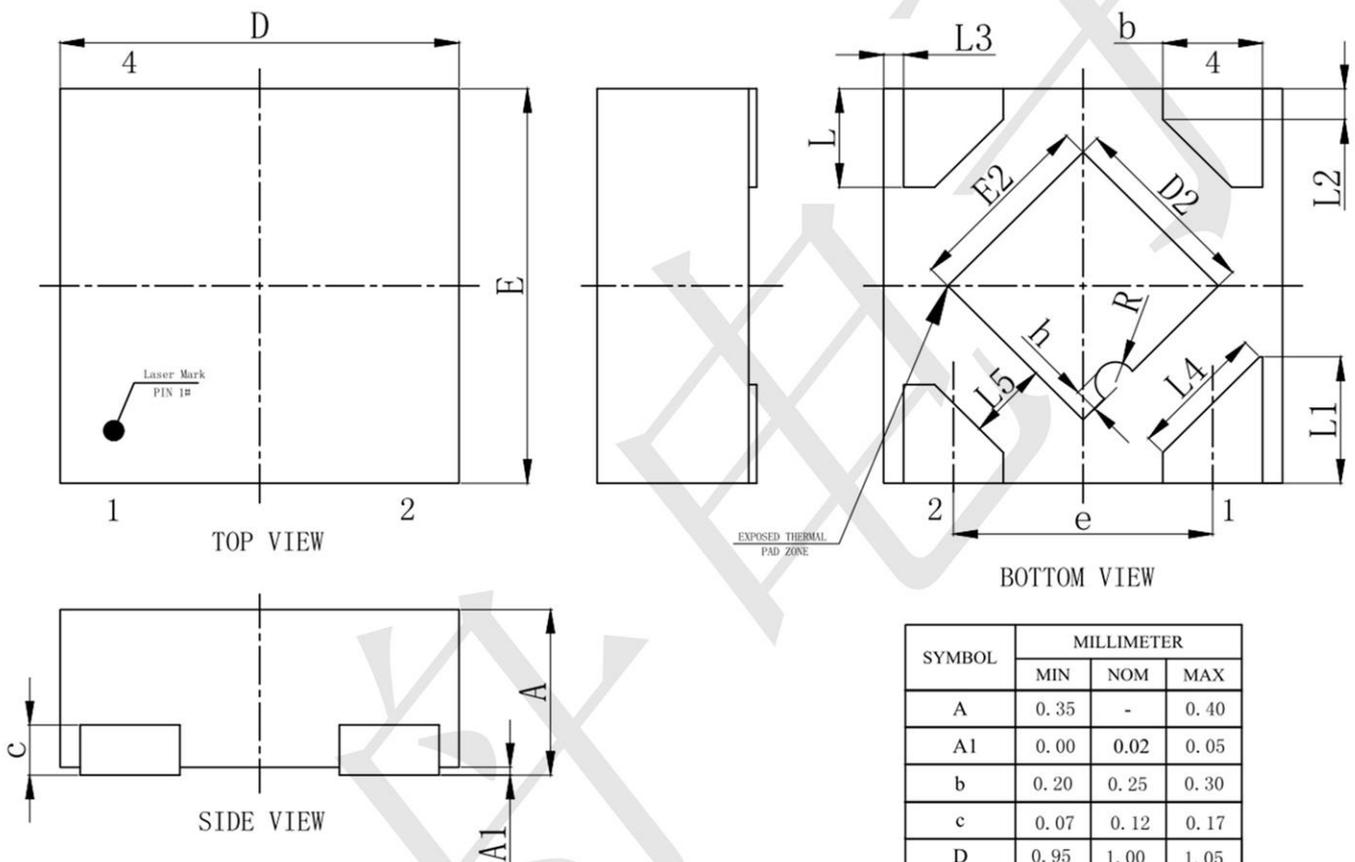

| SYMBOL | MILLIMETER | | |
|--------|------------|------|------|
| | MIN | NOM | MAX |
| A | 0.35 | - | 0.40 |
| A1 | 0.00 | 0.02 | 0.05 |
| b | 0.20 | 0.25 | 0.30 |
| c | 0.07 | 0.12 | 0.17 |
| D | 0.95 | 1.00 | 1.05 |
| D2 | 0.38 | 0.48 | 0.58 |
| e | 0.65BSC | | |
| E | 0.95 | 1.00 | 1.05 |
| E2 | 0.38 | 0.48 | 0.58 |
| L | 0.20 | 0.25 | 0.30 |
| L1 | 0.27 | 0.32 | 0.37 |
| L2 | 0.077REF | | |
| L3 | 0.05REF | | |
| L4 | 0.34REF | | |
| L5 | 0.20REF | | |
| R | 0.05REF | | |
| h | 0.06REF | | |

Package informantion

3-pin SOT23-5 Outline Dimensions

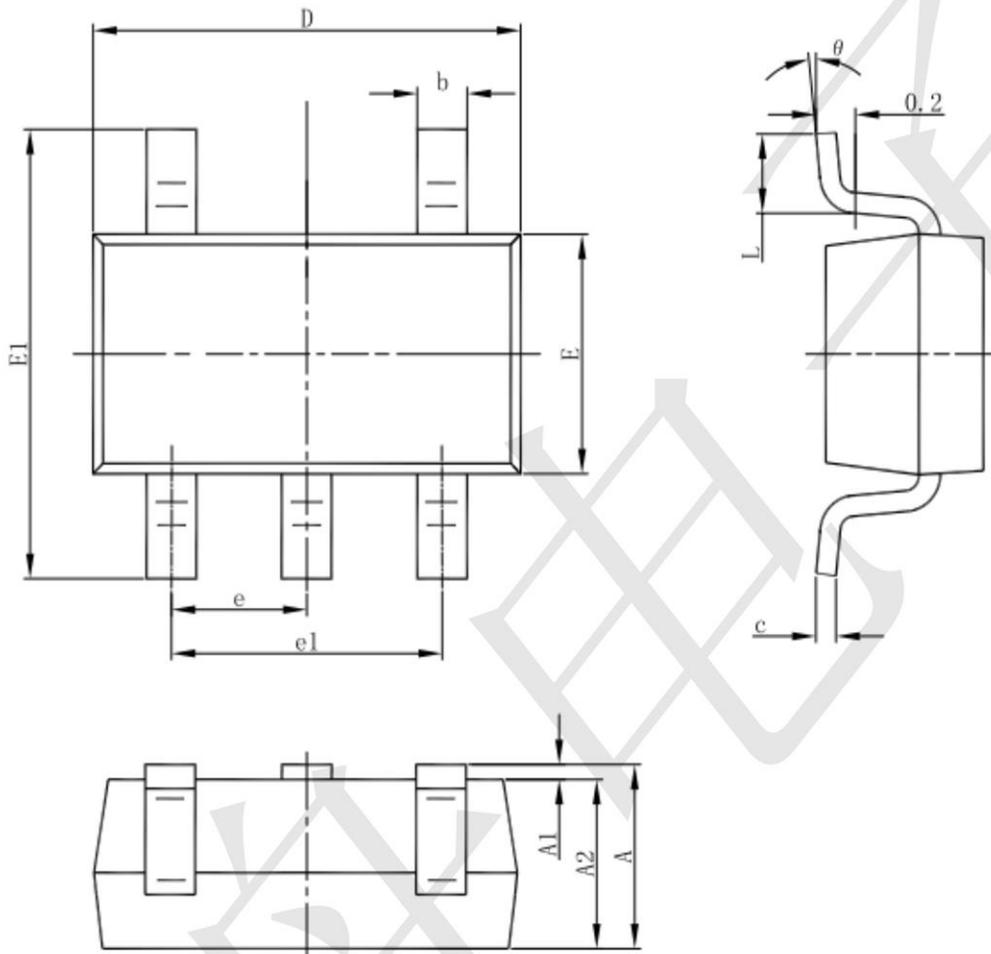

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|--------|---------------------------|-------|----------------------|-------|
| | Min | Max | Min | Max |
| A | 1.050 | 1.250 | 0.041 | 0.049 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 1.050 | 1.150 | 0.041 | 0.045 |
| b | 0.300 | 0.500 | 0.012 | 0.020 |
| c | 0.100 | 0.200 | 0.004 | 0.008 |
| D | 2.820 | 3.020 | 0.111 | 0.119 |
| E | 1.500 | 1.700 | 0.059 | 0.067 |
| E1 | 2.650 | 2.950 | 0.104 | 0.116 |
| e | 0.950(BSC) | | 0.037(BSC) | |
| e1 | 1.800 | 2.000 | 0.071 | 0.079 |
| L | 0.300 | 0.600 | 0.012 | 0.024 |
| theta | 0° | 8° | 0° | 8° |