


PRODUCT SUMMARY


$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
-40V	8m Ω	-74A


Features

- Pb-Free, Halogen Free and RoHS compliant.
- Low $R_{DS(on)}$ to Minimize Conduction Losses.
- Ohmic Region Good $R_{DS(on)}$ Ratio.
- Optimized Gate Charge to Minimize Switching Losses.

Applications

- Protection Circuits Applications.
- Logic/Load Switch Circuits Applications.



G. GATE
D. DRAIN
S. SOURCE

100% UIS Tested
100% Rg Tested

ABSOLUTE MAXIMUM RATINGS ($T_A = 25\text{ }^{\circ}\text{C}$ Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	-40	V
Gate-Source Voltage		V_{GS}	± 25	V
Continuous Drain Current ⁴	$T_C = 25\text{ }^{\circ}\text{C}$	I_D	-74	A
	$T_C = 100\text{ }^{\circ}\text{C}$		-46	
	$T_A = 25\text{ }^{\circ}\text{C}$		-12	
	$T_A = 70\text{ }^{\circ}\text{C}$		-9.6	
Pulsed Drain Current ¹		I_{DM}	-100	
Avalanche Current		I_{AS}	-49.8	
Avalanche Energy	$L = 0.1\text{mH}$	E_{AS}	124	mJ
Power Dissipation ³	$T_C = 25\text{ }^{\circ}\text{C}$	P_D	83	W
	$T_C = 100\text{ }^{\circ}\text{C}$		33	
	$T_A = 25\text{ }^{\circ}\text{C}$		2.2	
	$T_A = 70\text{ }^{\circ}\text{C}$		1.4	
Operating Junction & Storage Temperature Range		T_j, T_{stg}	-55 to 150	$^{\circ}\text{C}$

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE		SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Ambient ²	$t \leq 10s$	$R_{\theta JA}$		35	°C / W
Junction-to-Ambient ²	Steady-State	$R_{\theta JA}$		56	
Junction-to-Case	Steady-State	$R_{\theta JC}$		1.5	

¹Pulse width limited by maximum junction temperature.

²The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ \text{C}$. The value in any given application depends on the user's specific board design.

³The Power dissipation is based on $R_{\theta JA}$ $t \leq 10s$ value.

⁴Package limitation current is -51A.

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ \text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D = -250μA	-40			V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = -250μA	-1	-1.6	-3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0V, V _{GS} = ±25V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = -32V, V _{GS} = 0V			-1	uA
		V _{DS} = -30V, V _{GS} = 0V, T _J = 125 °C			-10	
Drain-Source On-State Resistance ¹	R _{DS(ON)}	V _{GS} = -10V, I _D = -20A		6.2	8	mΩ
		V _{GS} = -4.5V, I _D = -15A		8.4	14	
Forward Transconductance ¹	g _{fs}	V _{DS} = -5V, I _D = -20A		60		S
DYNAMIC						
Input Capacitance	C _{iss}	V _{GS} = 0V, V _{DS} = -20V, f = 1MHz		3933		pF
Output Capacitance	C _{oss}			507		
Reverse Transfer Capacitance	C _{rss}			451		
Gate Resistance	R _g	V _{GS} = 0V, V _{DS} = 0V, f = 1MHz		3.5		Ω
Total Gate Charge ²	Q _g	V _{DS} = -20V, V _{GS} = -10V , I _D = -20A		84		nC
Gate-Source Charge ²	Q _{gs}			10		
Gate-Drain Charge ²	Q _{gd}			20		
Turn-On Delay Time ²	t _{d(on)}	I _D ≅ -20A, V _{GS} = -10V, R _{GS} = 6 Ω		18		nS
Rise Time ²	t _r			45		
Turn-Off Delay Time ²	t _{d(off)}			173		
Fall Time ²	t _f			122		

SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_J = 25 °C)


Continuous Current ³	I _S				-63	A
Forward Voltage ¹	V _{SD}	I _F = -20A, V _{GS} = 0V			-1.3	V
Reverse Recovery Time	t _{rr}	I _F = -20A , di _F /dt = 100 A / μS		31		nS
Reverse Recovery Charge	Q _{rr}			12		nC

¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.


²Independent of operating temperature.

³Package limitation current is -51A.


Output Characteristics

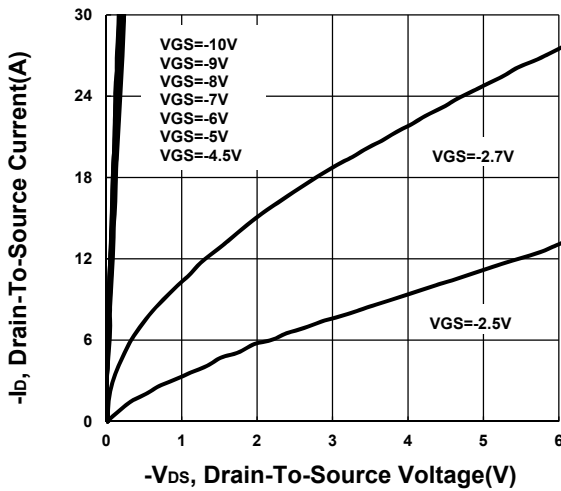


Transfer Characteristics

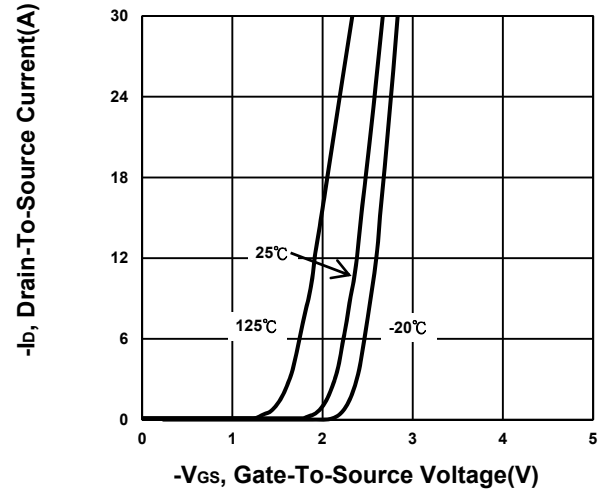


On-Resistance VS Gate-To-Source

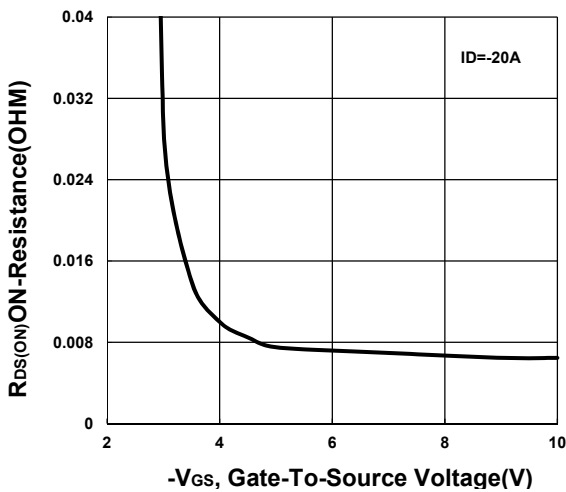


On-Resistance VS Drain Current

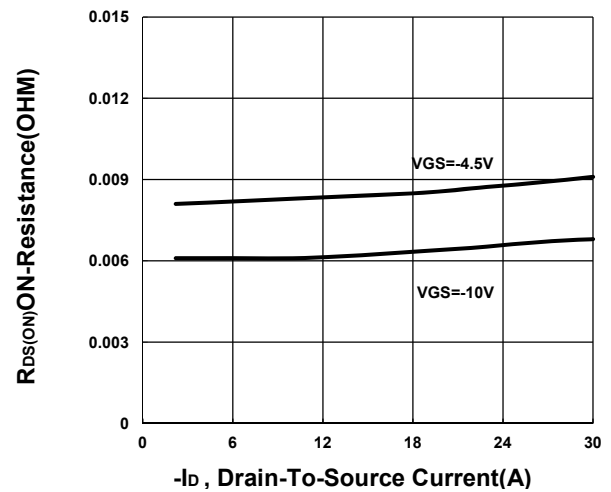


On-Resistance VS Temperature

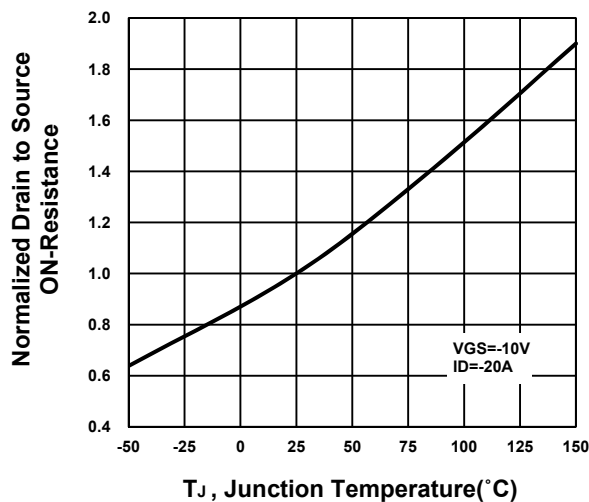


Capacitance Characteristic

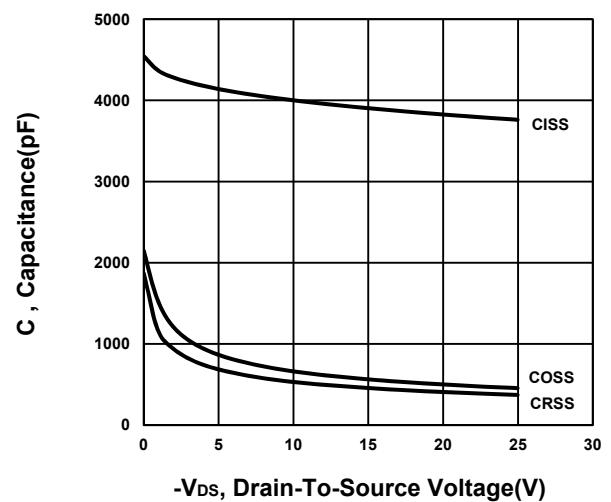


Gate charge Characteristics

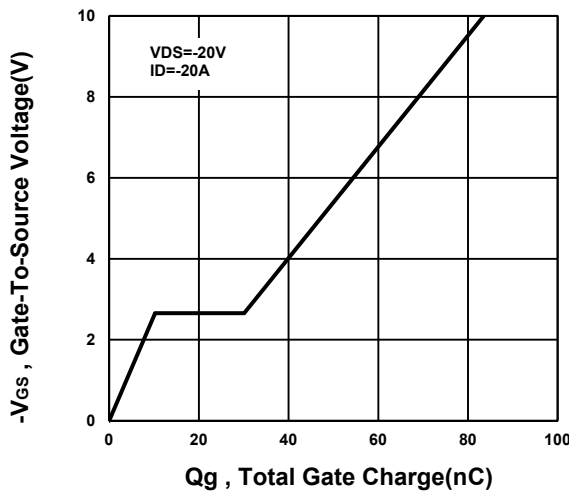


Source-Drain Diode Forward Voltage

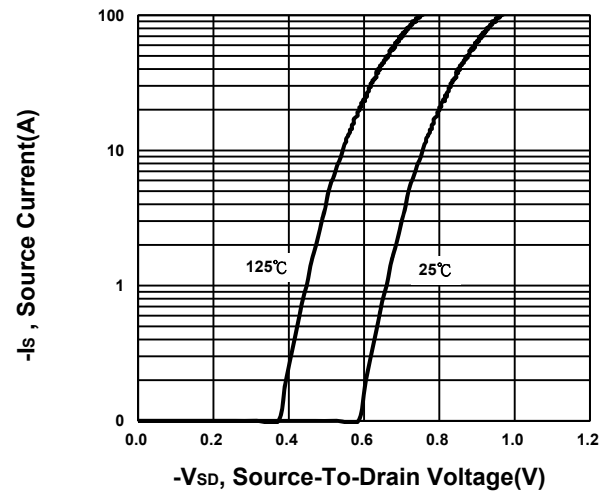


Safe Operating Area

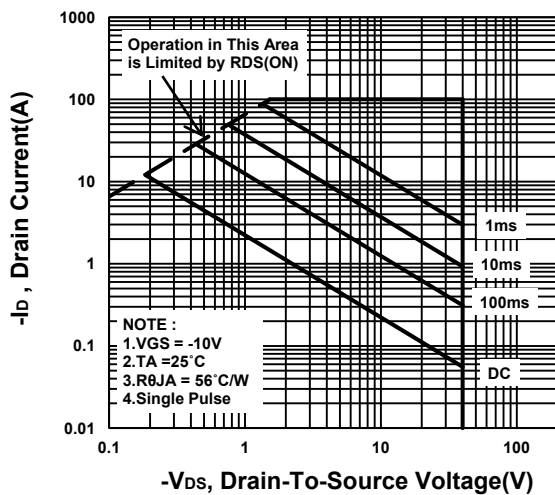

Single Pulse Maximum Power Dissipation

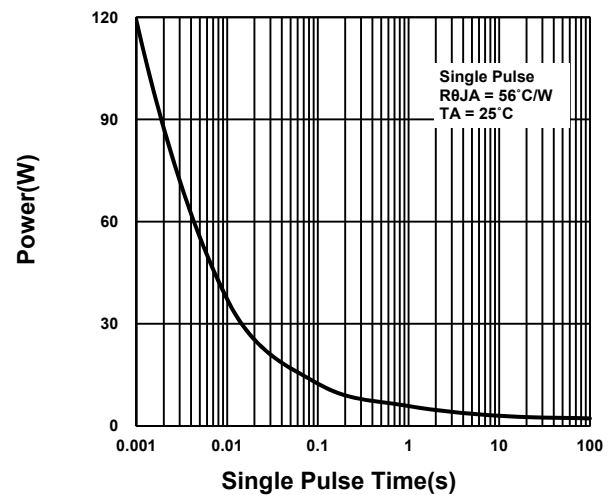


Transient Thermal Response Curve

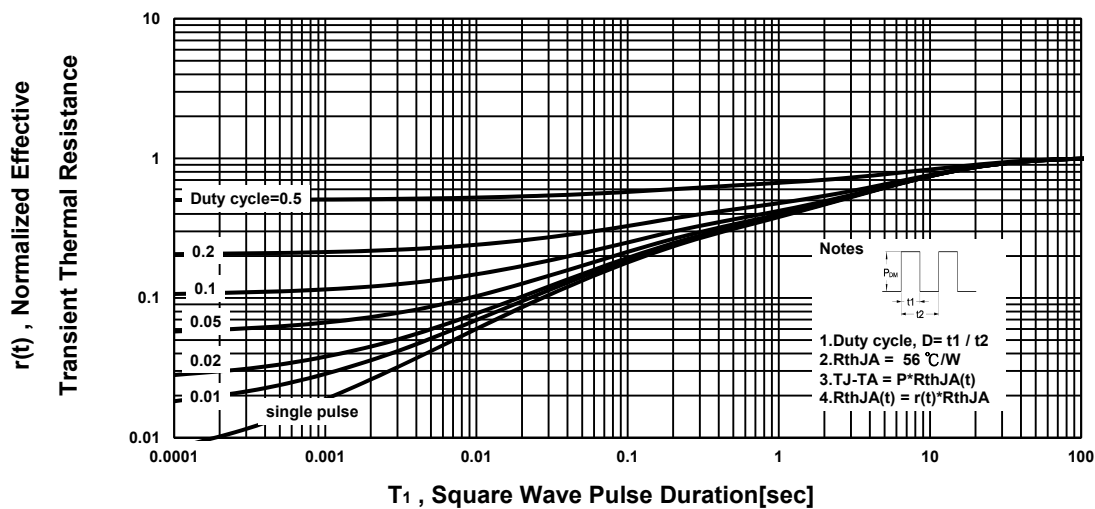

Package Dimension

PDFN 5x6P MECHANICAL DATA


Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	4.8		5.15	J	3.34		3.9
B	5.42		5.9	K	0.9		
C	5.9		6.35	L	0.38		0.711
D	0.3		0.51	M	0°		12°
E	1.17	1.27	1.37	N	4.8		5.4
F	0.8	1	1.2	O	0.05		0.36
G	0.15		0.35	P	0.05		0.25
H	3.67		4.31	S	3.73		4.19
I	0.38		0.71				

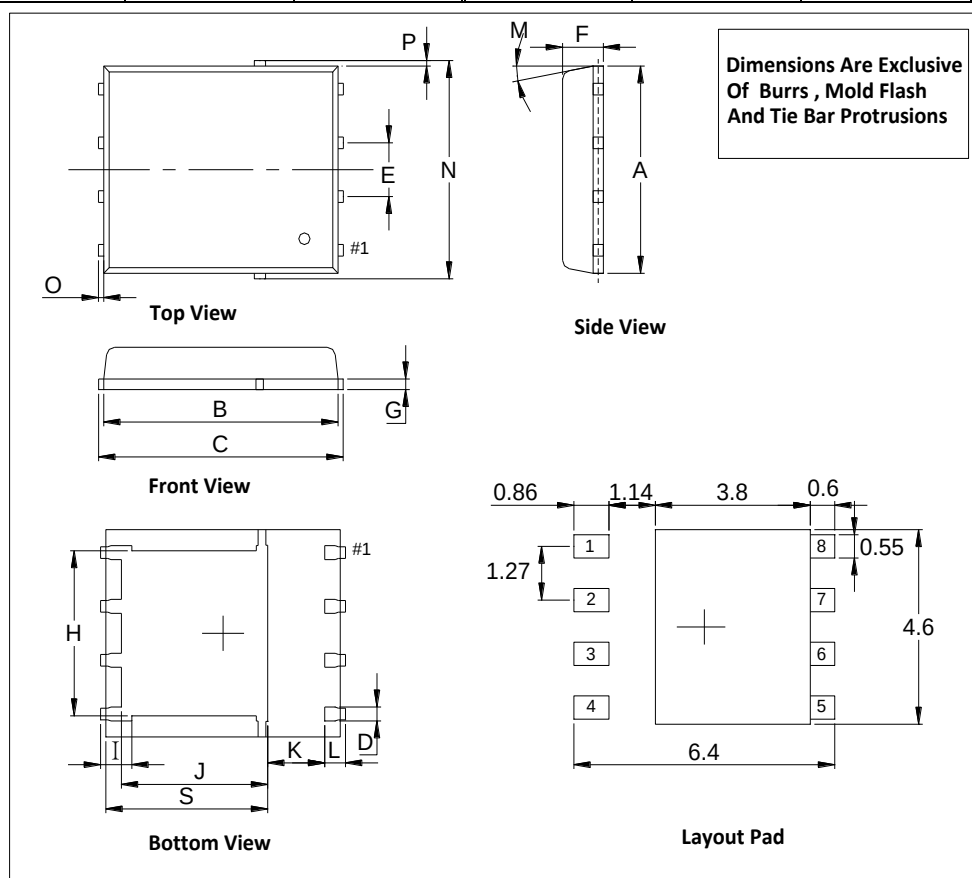

* 因應各家封裝模具不同而外觀略有所差異，不影響電性及 Layout。


Marking Information:(Please see the corresponding data sheet)

1. 零件Marking 文字面說明

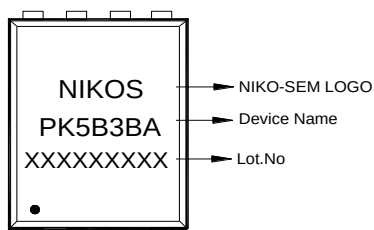


#1

2. 零件 Part number 說明

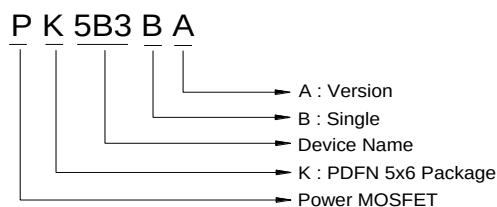

Tape&Reel Information:3000pcs/Reel

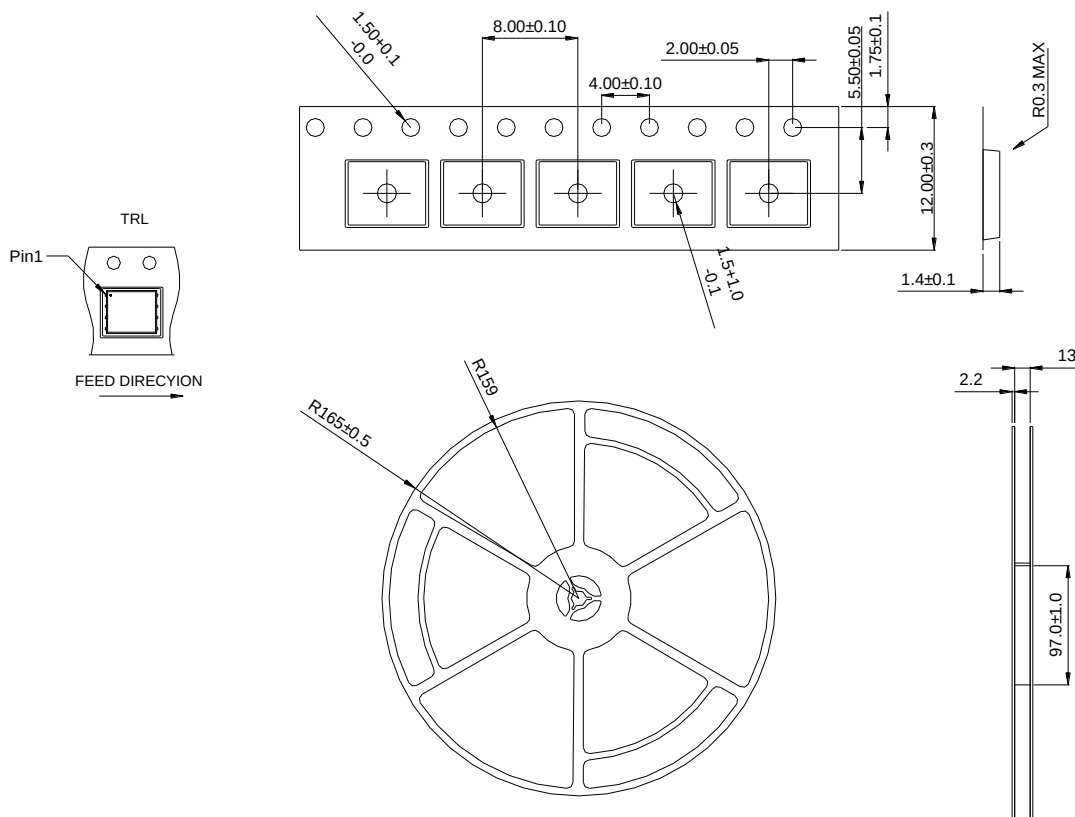

附註:All Dimension in millimeter

Lot.No. & Date Code rule


1.LOT.NO.

M N 15M21 03



2.Date Code

D Y M X XXX

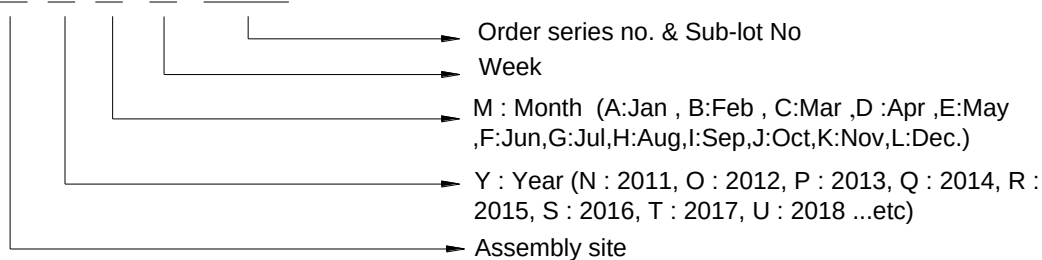


3.Date Code (for Small package)

XX Y WW



Label rule

標籤內容 (Label content)

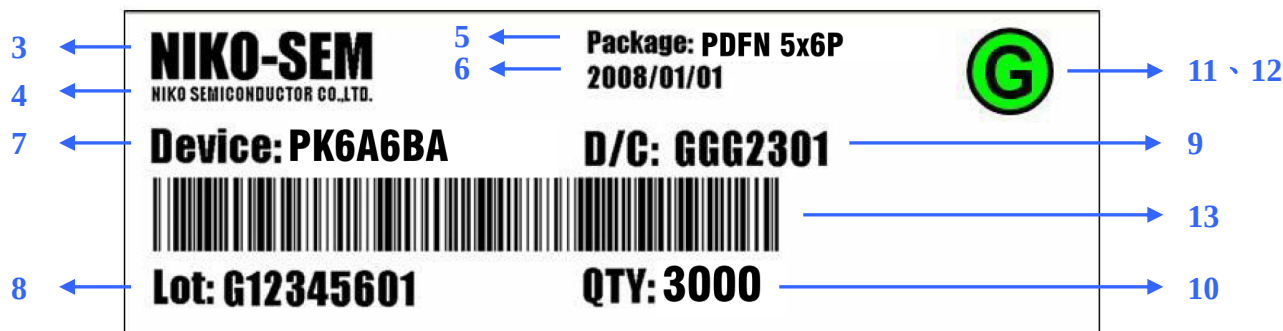

1	Label Size	30 * 90 mm
2	Font style	Times New Roman or Arial (或可區分英文”O”和數字”0”，”G 和”Q”的字型即可) (Or any font capable of being distinguished for Letter O and digital 0, and for G and Q))
3	NIKO-SEM	Height: 4 mm
4	NIKO SEMICONDUCTOR CO., LTD.	Height: 1 mm
5	Package	Height: 2 mm
6	Date	Height: 2 mm Shipping date: YYYY/MM/DD, ex. 2008/09/12
7	Device	Height: 3 mm (Max: 16 Digit) Device Name not including Rev.
8	Lot	Height: 3 mm (Max: 9 Digit) Sub lot
9	D/C	Height: 3 mm (Max: 7 Digit)
10	QTY	Height: 3 mm (Max: 6 Digit) Thousand mark is no needed
11	Pb Free label	 Diameter: 1 cm bottom color: Green Font color: Black Font style: Arial
12	Halogen Free label	 Diameter: 1 cm bottom color: Green Font color: Black Font style: Arial
13	Scan info	Device / Lot / D/C / QTY , Insert “ / “ between every parts. for example: P3055LDG/G12345601/GGG2301/2000 DPI (Dots per inch): Over 300 dpi Code : Code 128 Height: 6 mm at least