


FS432M


SOT-23

- 1.Reference
- 2.Cathode
- 3.Anode



■ DESCRIPTION & SYMBOL 功能和符號

輸出電壓从基准電壓到 18 伏可調的穩壓二極管



■ MAXIMUM RATINGS 最大額定值

Characteristic 特性參數	Symbol 符號	Rating 額定值	Unit 單位
Cathode to Anode Voltage 陰極到陽極電壓	V_{KA}	18	V
Cathode Current Range(Continuous) 流過陰極電流(連續)	I_{KA}	100	mA
Reference Input Current Range 基准電流	I_{ref}	3	mA
Power Dissipation 耗散功率	P_D	225	mW
Operating Temperature 工作溫度	T_{opr}	0 ~ 70	°C
Storage Temperature 儲存溫度	T_{stg}	-40 ~ +150	°C

■ DEVICE MARKING 打標

FS432M=432

FS432M

■ ELECTRICAL CHARACTERISTICS 電特性


($T_A=25^\circ\text{C}$ unless otherwise noted 如無特殊說明，溫度為 25°C)

Characteristic 特性參數	Symbol 符號	Test Condition 測試條件	Min 最小值	Typ 典型值	Max 最大值	Unit 單位
Reference Input Voltage 基准電壓精度	V_{REF} 0.5% 1% 2%	$V_{\text{KA}}=V_{\text{REF}}$, $I_{\text{KA}}=10\text{mA}$	1.234 1.227 1.215	1.240 1.240 1.240	1.246 1.253 1.265	V
Deviation of reference Input Voltage Over temperature 標準溫度內基准電壓偏差	$\Delta V_{\text{REF}}/\Delta T$	$V_{\text{KA}}=V_{\text{REF}}$, $I_{\text{KA}}=10\text{mA}$ $0 \sim 70^\circ\text{C}$	—	10	25	mV
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage 陰極電壓與基准電壓变化比	$\Delta V_{\text{REF}}/\Delta V_{\text{KA}}$	$I_{\text{KA}}=10\text{mA}$ $\Delta V_{\text{KA}}=18\text{V} \sim V_{\text{REF}}$	—	-1.0	-2.7	mV/V
Reference Input Current 基准電流	I_{REF}	$I_{\text{KA}}=10\text{mA}$ $R_1=10\text{k}\Omega, R_2=\infty$	—	0.25	0.5	uA
Deviation of Reference Input Current Over Full Temperature Range 標準溫度內基准電流偏差	$\Delta I_{\text{REF}}/\Delta T$	$I_{\text{KA}}=10\text{mA}$ $R_1=10\text{k}\Omega, R_2=\infty$ $T_A=\text{Full Temperature}$	—	0.05	0.3	uA
Minimum Cathode Current for Regulation 最小陰極電流	$I_{\text{KA}}(\text{MIN})$	$V_{\text{KA}}=V_{\text{REF}}$	—	60	80	uA
Off-state Cathode Current 关闭状态陰極電流	$I_{\text{KA}}(\text{OFF})$	$V_{\text{KA}}=18\text{V}$ $V_{\text{REF}}=0\text{V}$	—	0.04	0.5	uA
Dynamic Impedance 輸出阻抗	Z_{KA}	$V_{\text{KA}}=V_{\text{REF}}$ $I_{\text{KA}}=1 \text{ to } 100\text{mA}$ $f \leq 1\text{kHz}$	—	0.2	0.4	Ω

FS432M

■ DIMENSION 外形封裝尺寸

單位(UNIT): mm

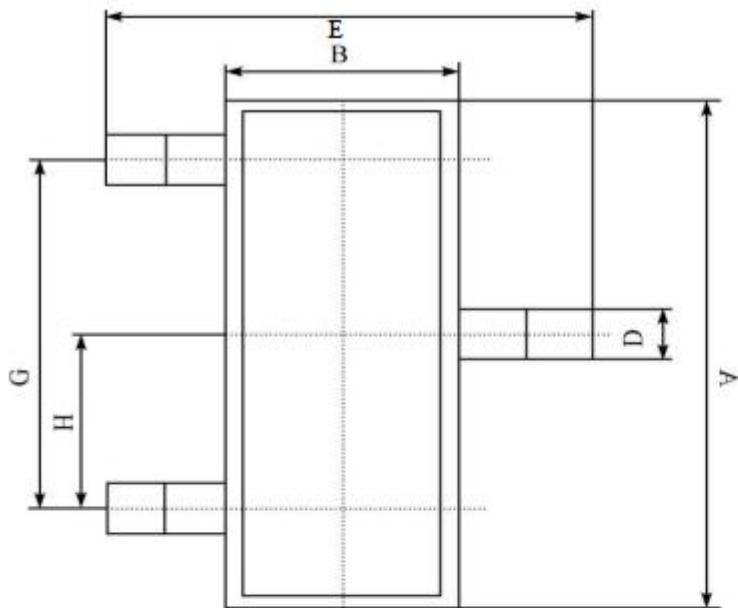

代碼	範圍(單位:mm)
A	2.80~3.00
B	1.20~1.40
C	0.90~1.10
D	0.30~0.50
E	2.20~2.60
G	1.80~2.00
H	0.90~1.00
J	0.08~0.18
K	0.02~0.12
M	≥0.22
N	0.50~0.70
P	6°~10°

