

S8050

DATASHEET

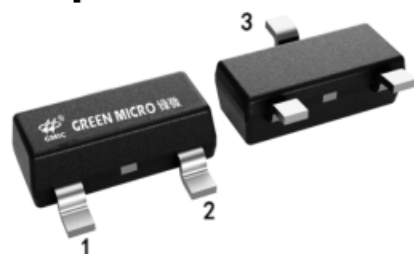
Specification Revision History:

Version	Date	Description
V1.0	2021/05	New
V1.1	2023/01	Modify Ordering Information
V1.2	2024/02	Modify Ordering Information
V1.3	2025/05	Add application precautions and overall typesetting.


Features

- ※SOT23 Plastic-Encapsulate Transistors (NPN)
- ※Collector current $I_C=0.5A$.
- ※Power amplifier applications.
- ※Complementary to S8550A

Simplified Outline



- 1.Base
- 2.Emitter
- 3.Collector



SOT-23

Ordering Information

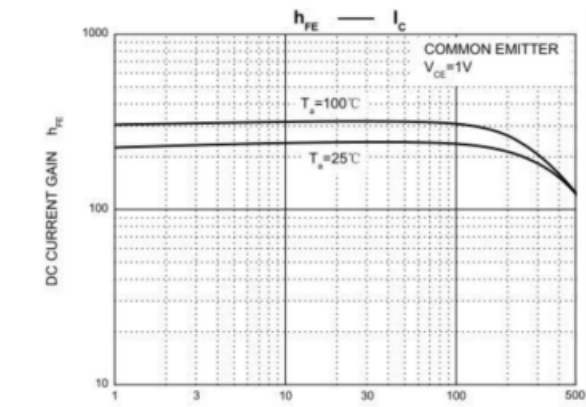
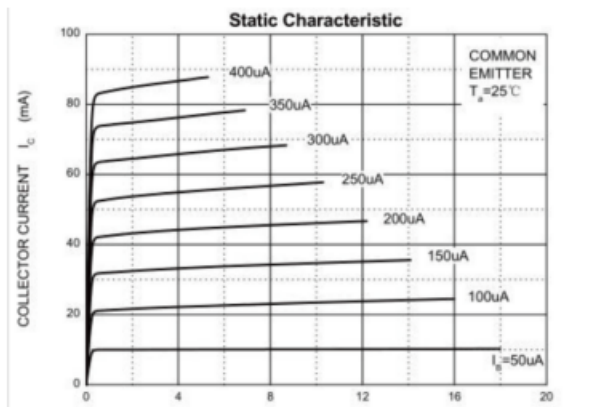
Product Model	Package Type	Marking	Packing	Packing Qty
S8050-GM	SOT-23	J3Y	REEL	3000PCS/REEL

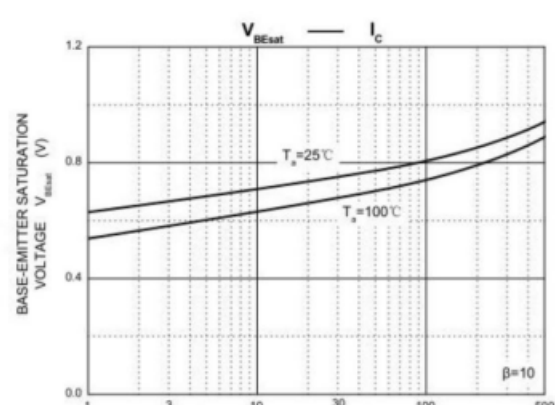
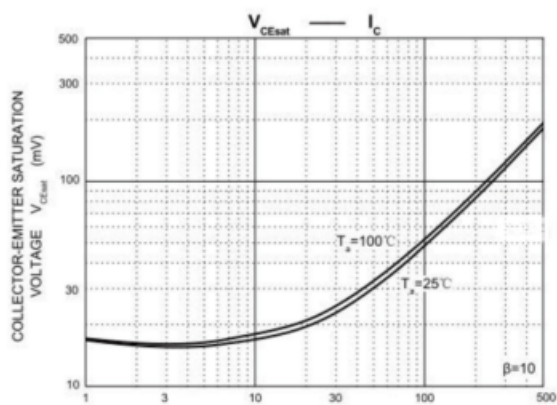
Absolute Maximum Ratings($T_A=25^{\circ}C$)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	25	V
V_{EBO}	Emitter-Base Voltage	5	V
I_C	Collector Current	0.5	A
P_C	Collector Power Dissipation	300	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	400	$^{\circ}C/W$
T_J, T_{stg}	Operation Junction And Storage Temperature Range	-55~+150	$^{\circ}C/W$

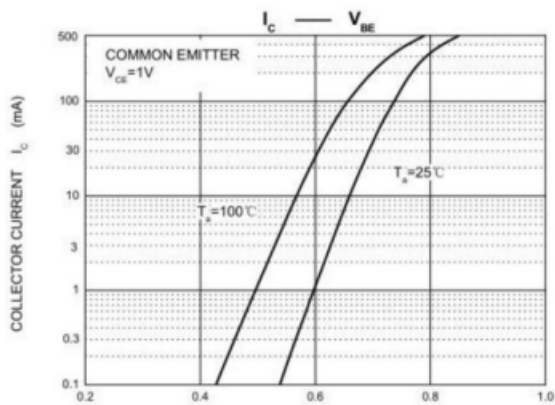
Electrical Characteristics (TA=25°C unless otherwise specified)

Symbol	Parameter	Test conditions	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C=100\mu A, I_E=0$	40			V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=0.1mA, I_B=0$	25			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E=100\mu A, I_C=0$	5			V
I_{CEO}	Collector cut-off current	$V_{CE}=20V, I_E=0$			100	nA
I_{CBO}	Collector cut-off current	$V_{CB}=40V, I_E=0$			100	nA
I_{EBO}	Emitter cut-off current	$V_{EB}=5V, I_C=0$			100	nA
$h_{FE(1)}$	DC current gain(1)	$V_{CE}=1V, I_C=50mA$	200		350	
$h_{FE(2)}$	DC current gain(2)	$V_{CE}=1V, I_C=500mA$	50			
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C=500mA, I_B=50mA$			0.6	V
$V_{BE(sat)}$	Base-emitter saturation voltage				1.2	V
f_T	Transition frequency	$V_{CE}=6V, I_C=20mA,$ $f=30MHz$	150			MHz

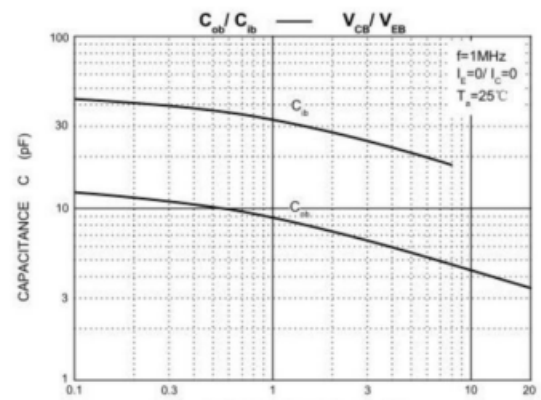
Typical Characteristics

 COLLECTOR-EMITTER VOLTAGE V_{CE} (V)

 COLLECTOR CURRENT I_C (mA)

 COLLECTOR CURRENT I_C (mA)

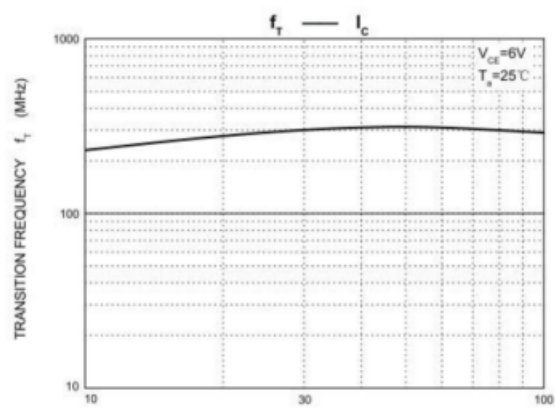
 COLLECTOR CURRENT I_C (mA)



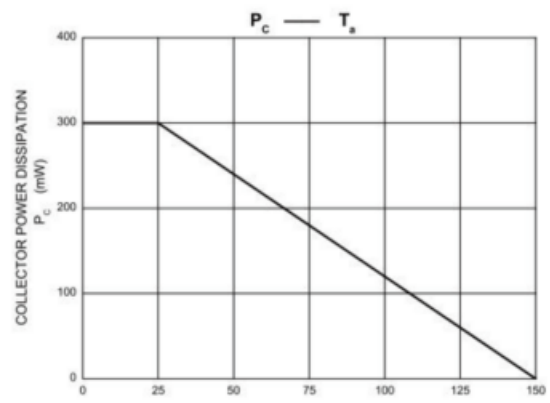
BASE-EMITTER VOLTAGE V_{BE} (V)



VOLTAGE V (V)

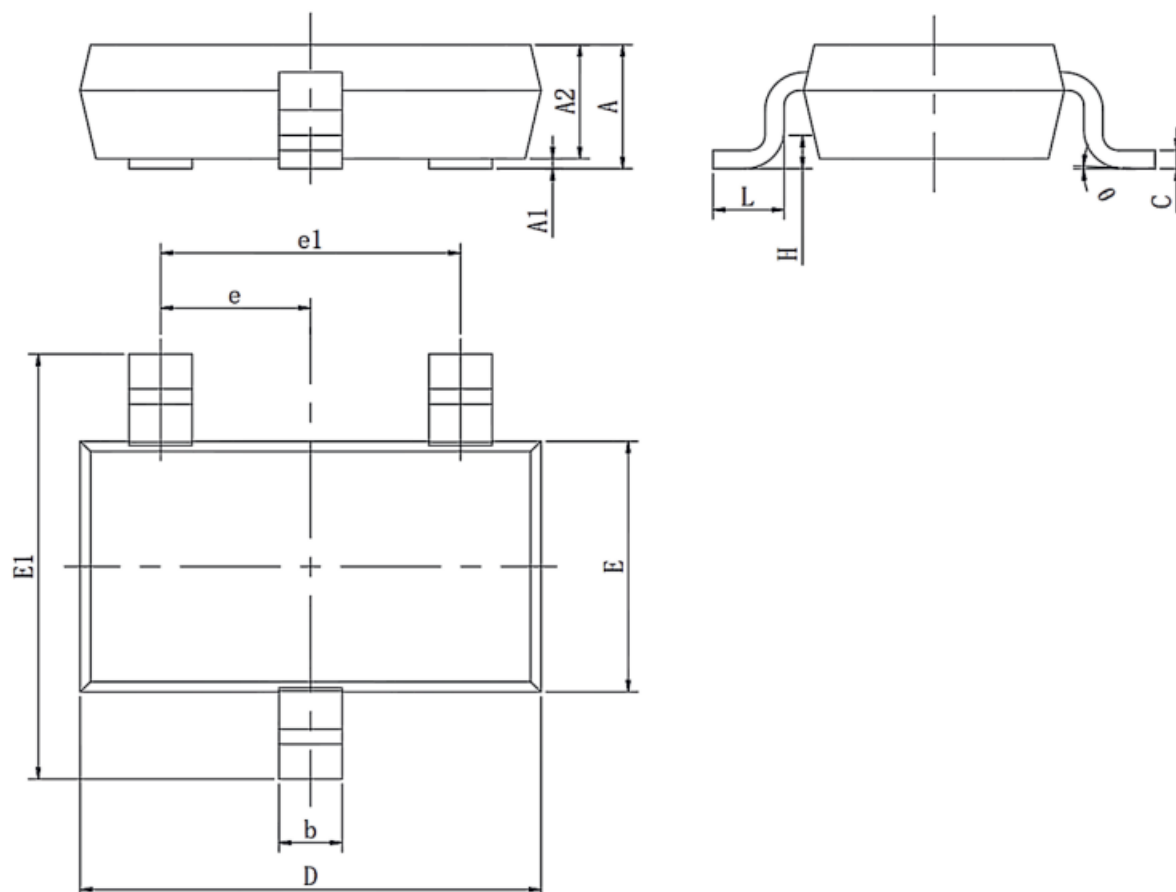


COLLECTOR CURRENT I_c (mA)



AMBIENT TEMPERATURE T_a (°C)

Outline Dimensions

SOT-23
Unit : mm


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
C	0.080	0.200	0.003	0.008
D	2.800	3.020	0.110	0.119
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.95 (BSC)		0.037(BSC)	
e1	1.90 (BSC)		0.075(BSC)	
L	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

Important Notice

- Green Micro chip reserves the right to change products and documents without notice. Customers should obtain and verify the completeness of the latest technical information before placing orders. Meanwhile, Green Micro chip shall not assume any responsibility or obligation for non-officially revised documents.
- Any parameters in the entire product specification are for reference only, and actual application testing shall prevail. When customers use the products for system design, they must comply with safety regulations and independently assume the following responsibilities: selecting suitable Green Micro chip products according to application requirements; completing design verification and full-link testing of the application; and ensuring that the application complies with safety regulations or other requirements of the target market. Customers shall bear all personal or property losses caused by design defects or illegal operations, which shall have no relation to Green Micro chip.
- Green Micro chip products are prohibited from being used in scenarios such as life support, military equipment, and key aerospace applications. All accidents and legal liabilities arising from out-of-scope use shall be borne by the user, and Green Micro chip shall not be held responsible.
- All technical resources of Green Micro chip (including data sheets and reference designs) are provided "as is", without guarantee of no defects or universality, and without any express or implied warranties. The documents are only authorized for product development and research described in this document. Unauthorized use of intellectual property, public reproduction, and reverse engineering are strictly prohibited. All claims and losses caused by illegal use shall be borne by the user, and Green Micro chip shall not be liable.