


## Low-Dropout Regulators

### Features

- High-current capability.....1.5A
- Low dropout voltage .....350mV
- Low ground current
- 1% initial accuracy
- Extremely fast transient response
- Reverse-battery and “load dump” protection
- Zero-current shutdown mode
- Error flag signals Output Out-of-Regulation
- Fixed voltage and adjustable versions

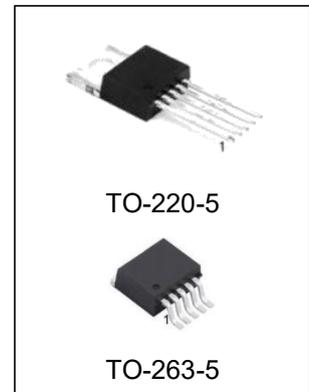

### Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
LP3965T-1.5/HG	TO-220-5	LP3965-1.5	TUBE	1000pcs/box
LP3965T-1.8/HG	TO-220-5	LP3965-1.8	TUBE	1000pcs/box
LP3965T-2.5/HG	TO-220-5	LP3965-2.5	TUBE	1000pcs/box
LP3965T-2.8/HG	TO-220-5	LP3965-2.8	TUBE	1000pcs/box
LP3965T-3.0/HG	TO-220-5	LP3965-3.0	TUBE	1000pcs/box
LP3965T-3.3/HG	TO-220-5	LP3965-3.3	TUBE	1000pcs/box
LP3965T-5.0/HG	TO-220-5	LP3965-5.0	TUBE	1000pcs/box
LP3965T-8.0/HG	TO-220-5	LP3965-8.0	TUBE	1000pcs/box
LP3965T-9.0/HG	TO-220-5	LP3965-9.0	TUBE	1000pcs/box
LP3965T-12/HG	TO-220-5	LP3965-12	TUBE	1000pcs/box
LP3965S-1.5/TR-HG	TO-263-5	LP3965-1.5	REEL	500pcs/reel
LP3965S-1.8/TR-HG	TO-263-5	LP3965-1.8	REEL	500pcs/reel
LP3965S-2.5/TR-HG	TO-263-5	LP3965-2.5	REEL	500pcs/reel
LP3965S-2.8/TR-HG	TO-263-5	LP3965-2.8	REEL	500pcs/reel
LP3965S-3.0/TR-HG	TO-263-5	LP3965-3.0	REEL	500pcs/reel
LP3965S-3.3/TR-HG	TO-263-5	LP3965-3.3	REEL	500pcs/reel
LP3965S-5.0/TR-HG	TO-263-5	LP3965-5.0	REEL	500pcs/reel
LP3965S-8.0/TR-HG	TO-263-5	LP3965-8.0	REEL	500pcs/reel
LP3965S-9.0/TR-HG	TO-263-5	LP3965-9.0	REEL	500pcs/reel
LP3965S-12/TR-HG	TO-263-5	LP3965-12	REEL	500pcs/reel
LP3965T-ADJ/HG	TO-220-5	LP3965-ADJ	TUBE	1000pcs/box
LP3965S-ADJ/TR-HG	TO-263-5	LP3965-ADJ	REEL	500pcs/reel

## General Description

The LP3965-XX are high-current, high-accuracy, lowdropout voltage regulators. Using the process with a PNP pass element, these regulators feature 350mV (full load) dropout voltages and very low ground current. These devices also find applications in lower current, low-dropout critical systems, where their tiny dropout voltage and ground current values are important attributes.

The LP3965-XX are fully protected against over current faults, reversed input polarity, reversed lead insertion, over temperature operation, positive and negative transient voltage spikes. Five-pin fixed voltage versions feature a logic level ON/OFF control and an error flag, which signals whenever the output falls out of regulation. On the LP3965-XX and LP3965-ADJ the EN (Enable) pin may be tied to  $V_{IN}$ , if it is not required for the ON/OFF control.


The LP3965 are available in 5-pin TO-220, TO-263 packages.

The Output Voltage, (-XX), may be 1.5V, 1.8V, 2.5V, 2.8V, 3V, 3.3V, 5V, 8V, 9V, 12V

## Applications

- Battery-powered equipment
- High-efficiency “green” computer systems
- Automotive electronics
- High-efficiency linear power supplies
- High-efficiency post-regulator for switching supply

## PIN Configuration

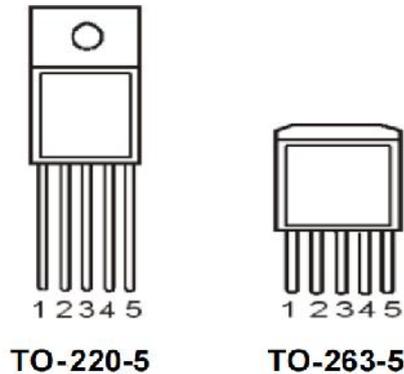

### Pinout

On all the devices, the Tab is grounded.

**LP3965-XX**, five-terminal fixed voltage devices

Pin 1 = EN (Enable), 2 = IN (Input), 3 = GND (Ground), 4 = OUT (Output), 5 = FLAG (Flag)

**LP3965-ADJ**, adjustable version with ON/OFF control

Pin 1 = EN (Enable), 2 = IN (Input), 3 = GND (Ground), 4 = OUT (Output), 5 = ADJ (Adjust)

## Absolute Maximum Ratings

Condition	Min	Max	UNITS
Input Supply Voltage	-20	+30	V
Power Dissipation	internally-limited		-
Lead Temperature (soldering, 10 seconds)	-	245	°C
Storage Temperature Range	-65	+150	°C

**Note:** Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.

## Operating Ratings

Condition	Min	Max	UNITS
Operating Input Voltage	2.3	26	V
Operating Junction Temperature <sup>(1)</sup>	-40	+125	°C

Note(1) : Operating temperature range: -40°C to +125°C. This product is designed for industrial grade applications. For automotive grade versions compliant with AEC-Q100, please conduct internal screening per the standard or contact our sales team for availability.

## Electrical Characteristics

All measurements at  $T_J=25^{\circ}\text{C}$ ,  $I_O=10\text{mA}$ ,  $V_{IN}=V_{OUT}+1\text{V}$ , unless otherwise noted. **Bold** values are guaranteed across the operating temperature range. Adjustable versions are programmed to 5.0V.

Parameter	Conditions	Min	Typ	Max	Units
Output Voltage	$I_O=10\text{mA}$	<b>-1</b>		<b>1</b>	%
	$10\text{mA}\leq I_O\leq 1.5\text{A}$ , $(V_{OUT}+1\text{V})\leq V_{IN}\leq 26\text{V}$	<b>-2</b>		<b>2</b>	%
Line Regulation	$I_O=10\text{mA}$ , $(V_{OUT}+1\text{V})\leq V_{IN}\leq 26\text{V}$		0.06	0.5	%
Load Regulation	$V_{IN}=V_{OUT}+5\text{V}$ , $10\text{mA}\leq I_{OUT}\leq 1.5\text{A}$ (Note 1)		0.2	<b>1</b>	%
$\frac{\Delta V_O}{\Delta T}$	Output Voltage Temperature Coefficient (Note 2)		<b>20</b>	<b>100</b>	ppm/ $^{\circ}\text{C}$
Dropout Voltage	$V_{OUT}=-1\%$ , (Note 1, 3)				
	$I_O=100\text{mA}$		100	<b>200</b>	mV
	$I_O=750\text{mA}$		250		
	$I_O=1.5\text{A}$		350	<b>600</b>	
Ground Current	(Note 1, 4) $I_O=750\text{mA}$ , $V_{IN}=V_{OUT}+1\text{V}$		8	<b>20</b>	mA
	$I_O=1.5\text{A}$		22		
$I_{GNDDO}$ , GND Pin Current at Dropout	$V_{IN}=0.5\text{V}$ less than specified $V_{OUT}$ , $I_{OUT}=10\text{mA}$ (Note 5)		2		mA
<b>Reference, LP3965-ADJ</b>					
Reference Voltage		1.228	1.240	1.252	V
		<b>1.215</b>		<b>1.265</b>	
Reference Voltage	(Note 6)	<b>1.203</b>		<b>1.277</b>	V
ADJ Pin Bias Current			20	80 <b>120</b>	nA
Reference Voltage Temperature Coefficient	(Note 2)		20		ppm/ $^{\circ}\text{C}$
ADJ Pin Bias Current Temperature Coefficient			0.1		nA/ $^{\circ}\text{C}$
<b>Flag Output (Error Comparator), LP3965-XX</b>					
Output Leakage Current	$V_{OH}=26\text{V}$		0.01	1.00 <b>2.00</b>	$\mu\text{A}$
Output Low Voltage	$V_{IN}=0.5\text{V}$ less than specified $V_{OUT}$ , $I_{OL}=250\mu\text{A}$ (Note 5)		220	300 <b>400</b>	mV
Upper Threshold Voltage	(Note 5)			99.2	% of $V_{OUT}$
Lower Threshold Voltage	(Note 5)	93			% of $V_{OUT}$
Hysteresis	(Note 5)		1		% of $V_{OUT}$
<b>EN Input</b>					
Input Logic Voltage Low (OFF) High (ON)		<b>2.4</b>		<b>0.8</b>	V
EN Pin Input Current	$V_{EN}=26\text{V}$		30	600 <b>750</b>	$\mu\text{A}$
	$V_{EN}=0.8\text{V}$			2.5 <b>5</b>	$\mu\text{A}$
Regulator Output Current Shutdown	(Note 7)		10	<b>500</b>	$\mu\text{A}$

**Notes:**

**Note 1:** Employ pulse-testing procedures to minimize temperature rise.

**Note 2:** Output Voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.

**Note 3:** Dropout Voltage is defined as the input-to-output differential when the Output Voltage drops to 99% of its nominal value with  $V_{OUT}+1V$  applied to  $V_{IN}$ . For Output Voltages below 2.3V the Dropout Voltage is the input-to-output voltage differential with the minimum input voltage being 2.3V. The minimum input operation voltage is 2.3V.

**Note 4:** GND pin current is the regulator quiescent current. The total current drawn from the source is a sum of the load current plus the GND pin current.


**Note 5:** For specified  $V_{OUT} \geq 2.5V$ .

**Note 6:**  $V_{REF} \leq V_{OUT} \leq (V_{IN}-1V)$ ,  $2.3V \leq V_{IN} \leq 26V$ ,  $10mA \leq I_L \leq 1.5A$ ,  $T_J < T_J \text{ MAX}$ .

**Note 7:**  $V_{EN} \leq 0.8V$  and  $V_{IN} \leq 26V$ ,  $V_{OUT}=0$

**Note 8:** When used in dual supply systems, where the regulator load is returned to a negative supply, the output voltage must be diode-clamped to ground.

**Block Diagram**

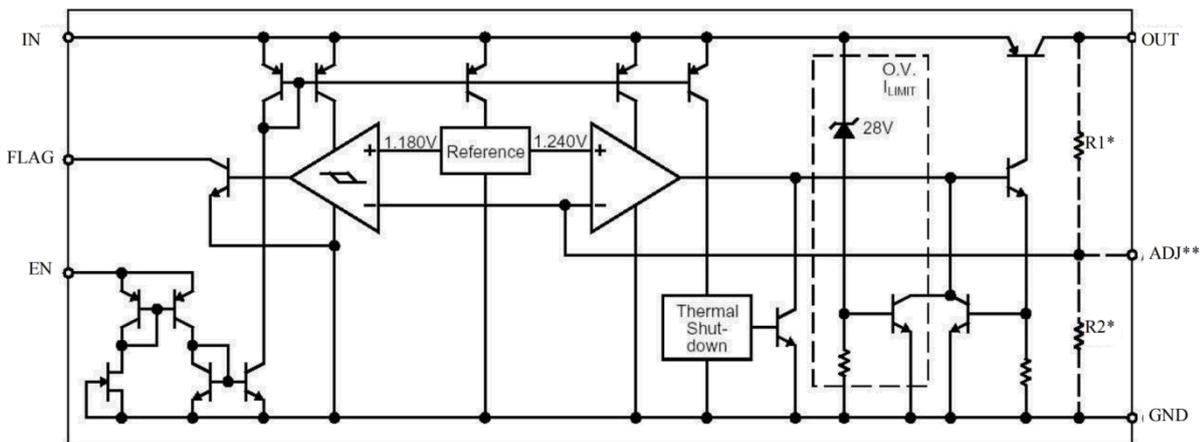

\*Feedback network in fixed versions only.  
\*\*Adjustable version only.

**Typical Applications**

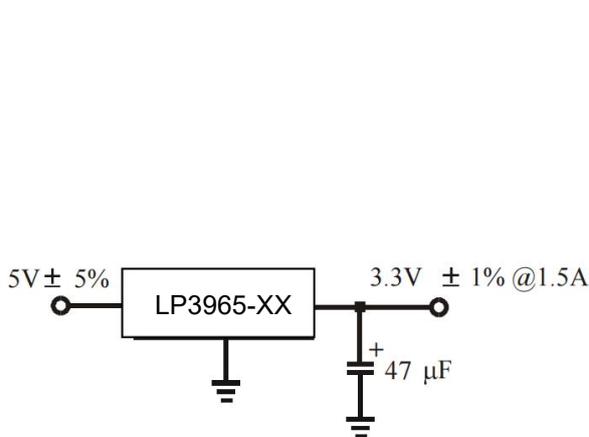


Fig.1. Fixed output voltage

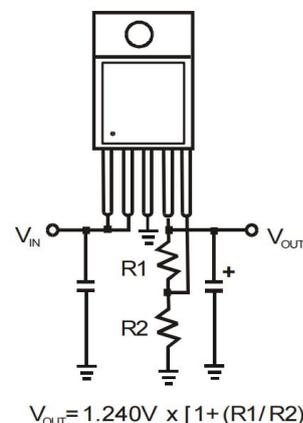


Fig.2. Adjustable output voltage configuration. For best results, the total series resistance should be small enough to pass the minimum regulator load current

## Application information

The LP3965-XX are high performance low-dropout voltage regulators suitable for all moderate to high-current voltage regulator applications. Their 350mV dropout voltage at full load makes them especially valuable in battery-powered systems and as high-efficiency noise filters in postregulator applications. Unlike older NPN-pass transistor designs, dropout performance of the PNP output of these devices is limited merely by the low  $V_{CE}$  saturation voltage.

The LP3965-XX family of regulators is fully protected from the damage due to fault conditions. Current limiting is provided. This limiting is linear; output current under overload conditions is constant. Thermal shutdown disables the device when the die temperature exceeds the 125 °C maximum safe operating temperature. The Transients protection allows the device survival even when the input voltage spikes between -20V and +30V. When the input voltage exceeds about 28V to 33V, the overvoltage sensor temporarily disables the regulator.

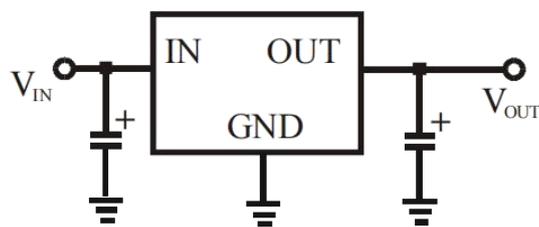


Fig.3. Linear regulators require only two capacitors for operation.

## Thermal Design

The linear regulators are simple to use. The most complicated design parameters to consider are thermal characteristics. Thermal design requires the following application-specific parameters:

- Maximum ambient temperature,  $T_A$
- Output Current,  $I_{OUT}$
- Output Voltage,  $V_{OUT}$
- Input Voltage,  $V_{IN}$

First, we calculate the power dissipation of the regulator from these numbers and the device parameters from this datasheet.

$$P_D = I_{OUT}(1.01V_{IN} - V_{OUT}),$$

where the ground current is approximated by 1% of  $I_{OUT}$

Then the heat sink thermal resistance is determined with this formula:

$$\theta_{SA} = \frac{T_{JMAX} - T_A}{P_D} - (\theta_{JC} + \theta_{CS}),$$

where  $T_{JMAX} \leq 125^\circ\text{C}$  and  $\theta_{CS}$  is between 0 and  $2^\circ\text{C/W}$ .

## Capacitor Requirements

For stability and minimum output noise, a capacitor on the regulator output is necessary. The value of this capacitor is dependent upon the output current; lower currents allow smaller capacitors. LP3965-XX regulators are stable with the  $10\mu\text{F}$  minimum capacitor values at a full load.

Where the regulator is powered from a source with a high AC impedance, a  $0.1\mu\text{F}$  capacitor connected between Input and GND is recommended. This capacitor should have good characteristics to above 250kHz.

## Minimum Load Current

The LP3965 regulators are specified between finite loads. If the output current is too small, leakage currents dominate and the output voltage rises. The 5mA minimum load current swamps any expected leakage current across the operating temperature range.

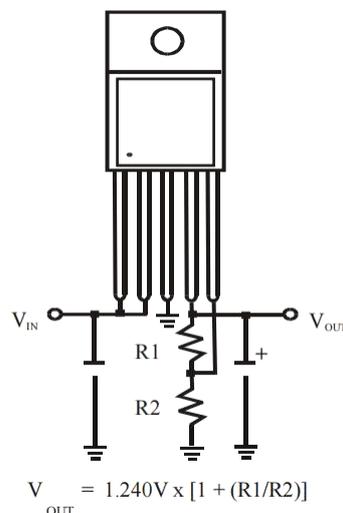


Fig.4. Adjustable Regulator with Resistors

## Adjustable Regulator Design

The adjustable regulator version, LP3965-ADJ , allows one to program the output voltage anywhere between 1.25V and 26V (maximum operating rating of the family). Two resistors are used. Resistors can be quite large, up to 1M , because of the very high input impedance and low bias current of the sense comparator: The resistor values are calculated by:

$$R_1 = R_2 \left( \frac{V_{OUT}}{1.240} - 1 \right),$$

where  $V_{OUT}$  is the desired output voltage. Figure 4 shows component definition. Applications with widely varying load currents may scale the resistors to draw the minimum load current required for proper operation.

## Error Flag


The LP3965-XX version features an Error Flag, which looks at the output voltage and signals an error condition when this voltage drops 5% below its expected value. The error flag is an open-collector output that pulls low under fault conditions. It may sink 10mA. Low output voltage signifies a number of possible problems, including an overcurrent fault (the device is in current limit) and a low input voltage. The flag output is inoperative during overtemperature shutdown conditions.

## Enable Input

LP3965 versions feature an enable (EN) input that allows ON/OFF control of the device. A special design allows “zero” current drain when the device is disabled - only microamperes of leakage current flow. The EN input has TTL/CMOS compatible thresholds for simple interfacing with logic, or may be directly tied to  $\leq 30V$ . Enabling the regulator requires approximately 20 $\mu A$  of current.


**Physical Dimensions**

TO-263-5

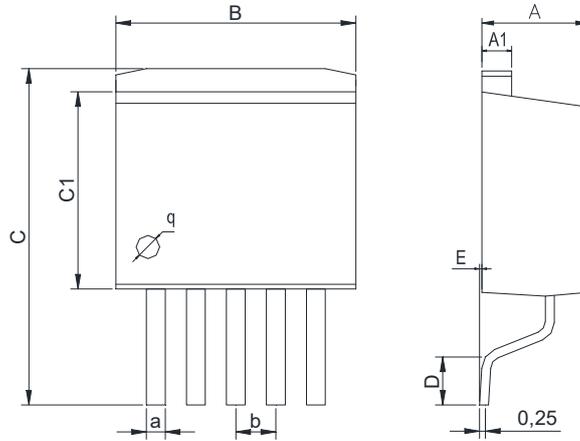

Dimensions In Millimeters(TO-263-5)									
Symbol:	A	A1	B	C	C1	D	E	a	b
Min:	4.45	1.22	10	13.7	8.40	1.90	0	0.71	1.70BSC
Max:	4.62	1.32	10.4	14.6	8.90	2.10	0.20	0.97	

TO-220-5

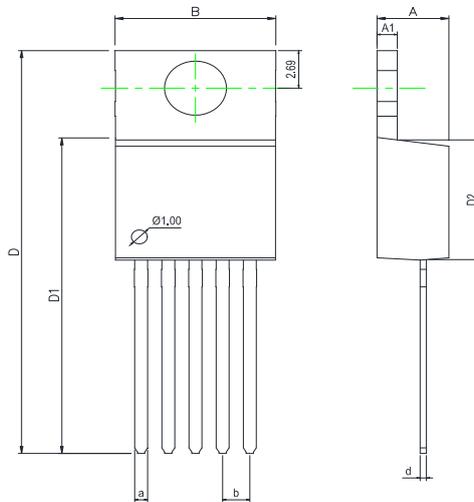

Dimensions In Millimeters(TO-220-5)									
Symbol:	A	A1	B	D	D1	D2	a	d	b
Min:	4.52	1.25	10	28.2	22.4	8.69	0.71	0.33	1.70BSC
Max:	4.62	1.29	10.3	28.9	22.6	8.79	0.97	0.42	

## Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2014-6	New	1-11
V1.1	2023-9	Update encapsulation type、 Update Lead Temperature	1、 3
V1.2	2025-12	Update important statements	11

**IMPORTANT STATEMENT:**

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.