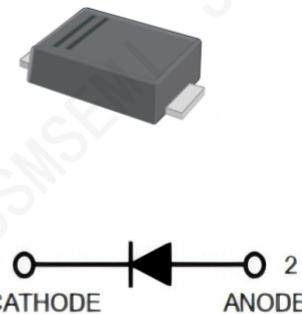


Description

The PMEG3050EP,115-JSM are surface mount Schottky barrier rectifiers designed to offer reliable performance in various electronic applications. These rectifiers feature a metal-silicon junction with majority carrier conduction, enabling low power loss and high efficiency. With reverse voltage ranging from 20V to 200V and a forward current of 3.0A, they are well-suited for use in low voltage, high frequency scenarios. Their surface mount design makes them convenient for integration into modern circuit layouts, while their high forward surge current capability ensures robustness in demanding operating conditions.



Features

- Metal silicon junction with majority carrier conduction
- Suitable for surface mounted applications
- Low power loss and high efficiency
- High forward surge current capability
- RoHS compliant
- SMAF package with 2 leads

Applications

- Low voltage, high frequency
- inverters Free wheeling circuits
- Polarity protection applications
- Power supplies
- DC-DC converters
- Battery charging systems

Ordering Information

Order number	Package	Operation Temperature Range	MSL Grade	Ship, Quantity	Green
PMEG3050EP,115-JSM	SOD-128	-55 ~ +125 °C	3	T&R,3000	Rohs

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

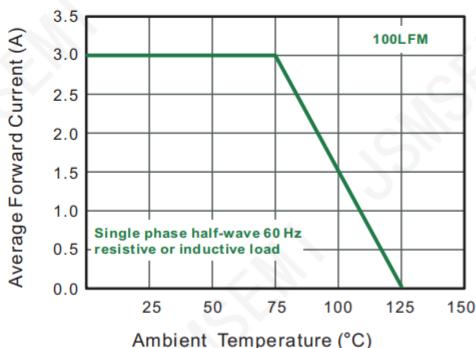
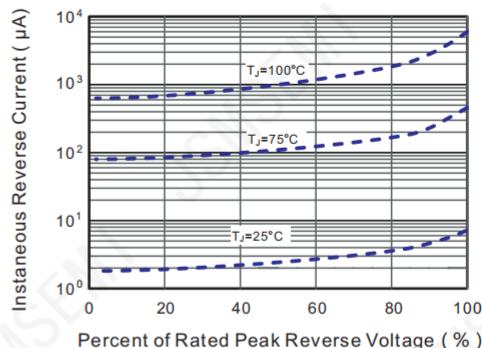
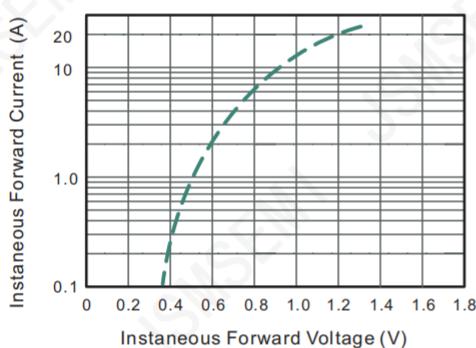
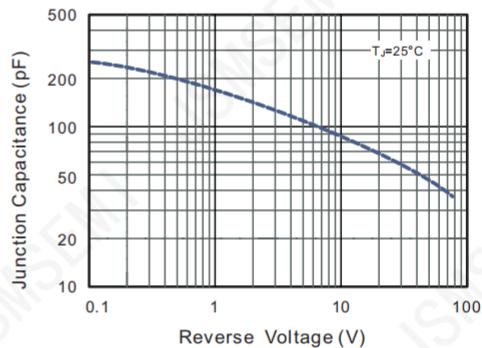
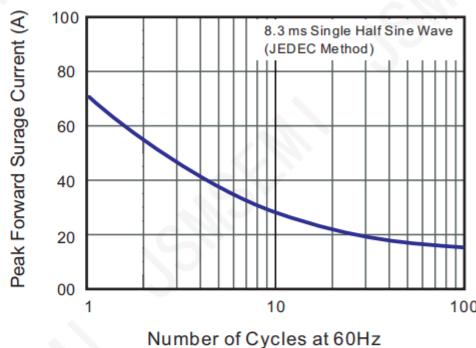
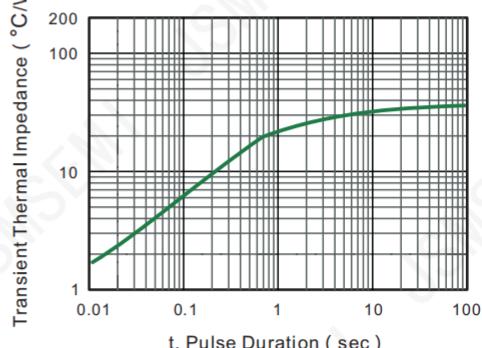
Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	Symbols	PMEG3050EP,115-JSM	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	60	V
Maximum RMS voltage	V_{RMS}	42	V
Maximum DC Blocking Voltage	V_{DC}	60	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3.0	A
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	80	A
Max Instantaneous Forward Voltage at 3 A	V_F	0.70	V
Maximum DC Reverse Current at Rated DC Reverse Voltage	I_R	0.3 5	mA
Typical Junction Capacitance ⁽¹⁾	C_J	160	pF
Typical Thermal Resistance ⁽²⁾	$R_{θJA}$	40	°C/W
Operating Junction Temperature Range	T_J	-55 ~ +125	°C
Storage Temperature Range	T_{stg}	-55 ~ +150	°C

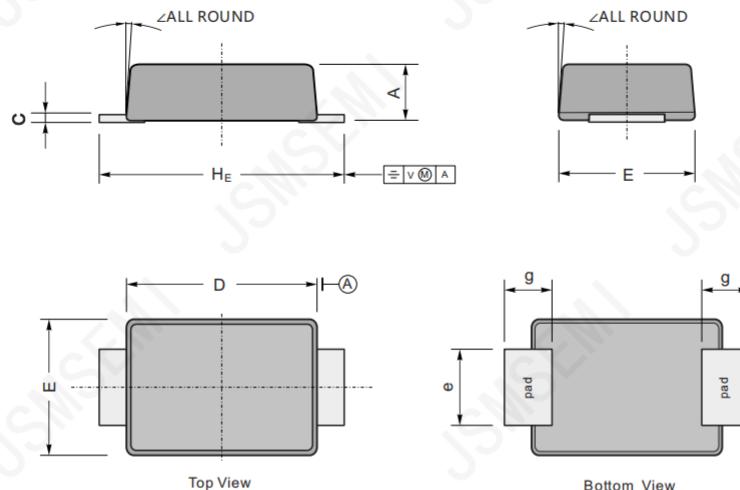
1) Measured at 1MHz and applied reverse voltage of 4 V D.C.

2) P.C.B. mounted with 0.2 X 0.2" (5 X 5 mm) copper pad areas.

Typical Performance Curves

Fig.1 Forward Current Derating Curve

Fig.2 Typical Reverse Characteristics

Fig.3 Typical Forward Characteristic

Fig.4 Typical Junction Capacitance

Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

Fig.6- Typical Transient Thermal Impedance


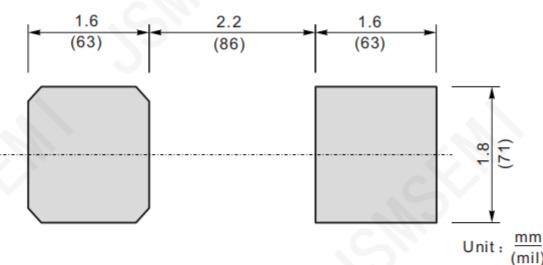
Package Qutline Dimensions



Plastic surface mounted package; 2 leads

UNIT		A	C	D	E	e	g	H _E	∠
mm	max	1.1	0.20	3.7	2.7	1.6	1.2	4.9	7°
	min	0.9	0.12	3.3	2.4	1.3	0.8	4.4	
mil	max	43	7.9	146	106	63	47	193	7°
	min	35	4.7	130	94	51	31	173	

The recommended mounting pad size



Revision History

Rev.	Change	Date
V1.0	Initial version	6/27/2021

Important Notice

JSMSEMI Semiconductor (JSMSEMI) PRODUCTS ARE NEITHER DESIGNED NOR INTENDED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS UNLESS THE SPECIFIC JSMSEMI PRODUCTS ARE SPECIFICALLY DESIGNATED BY JSMSEMI FOR SUCH USE. BUYERS ACKNOWLEDGE AND AGREE THAT ANY SUCH USE OF JSMSEMI PRODUCTS WHICH JSMSEMI HAS NOT DESIGNATED FOR USE IN MILITARY AND/OR AEROSPACE, AUTOMOTIVE OR MEDICAL DEVICES OR SYSTEMS IS SOLELY AT THE BUYER'S RISK.

JSMSEMI assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using JSMSEMI products.

Resale of JSMSEMI products or services with statements different from or beyond the parameters stated by JSMSEMI for that product or service voids all express and any implied warranties for the associated JSMSEMI product or service. JSMSEMI is not responsible or liable for any such statements.

JSMSEMI All Rights Reserved. Information and data in this document are owned by JSMSEMI wholly and may not be edited, reproduced, or redistributed in any way without the express written consent from JSMSEMI.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the JSMSEMI product that you intend to use.

For additional information please contact Kevin@jsmsemi.com or visit www.jsmsemi.com