
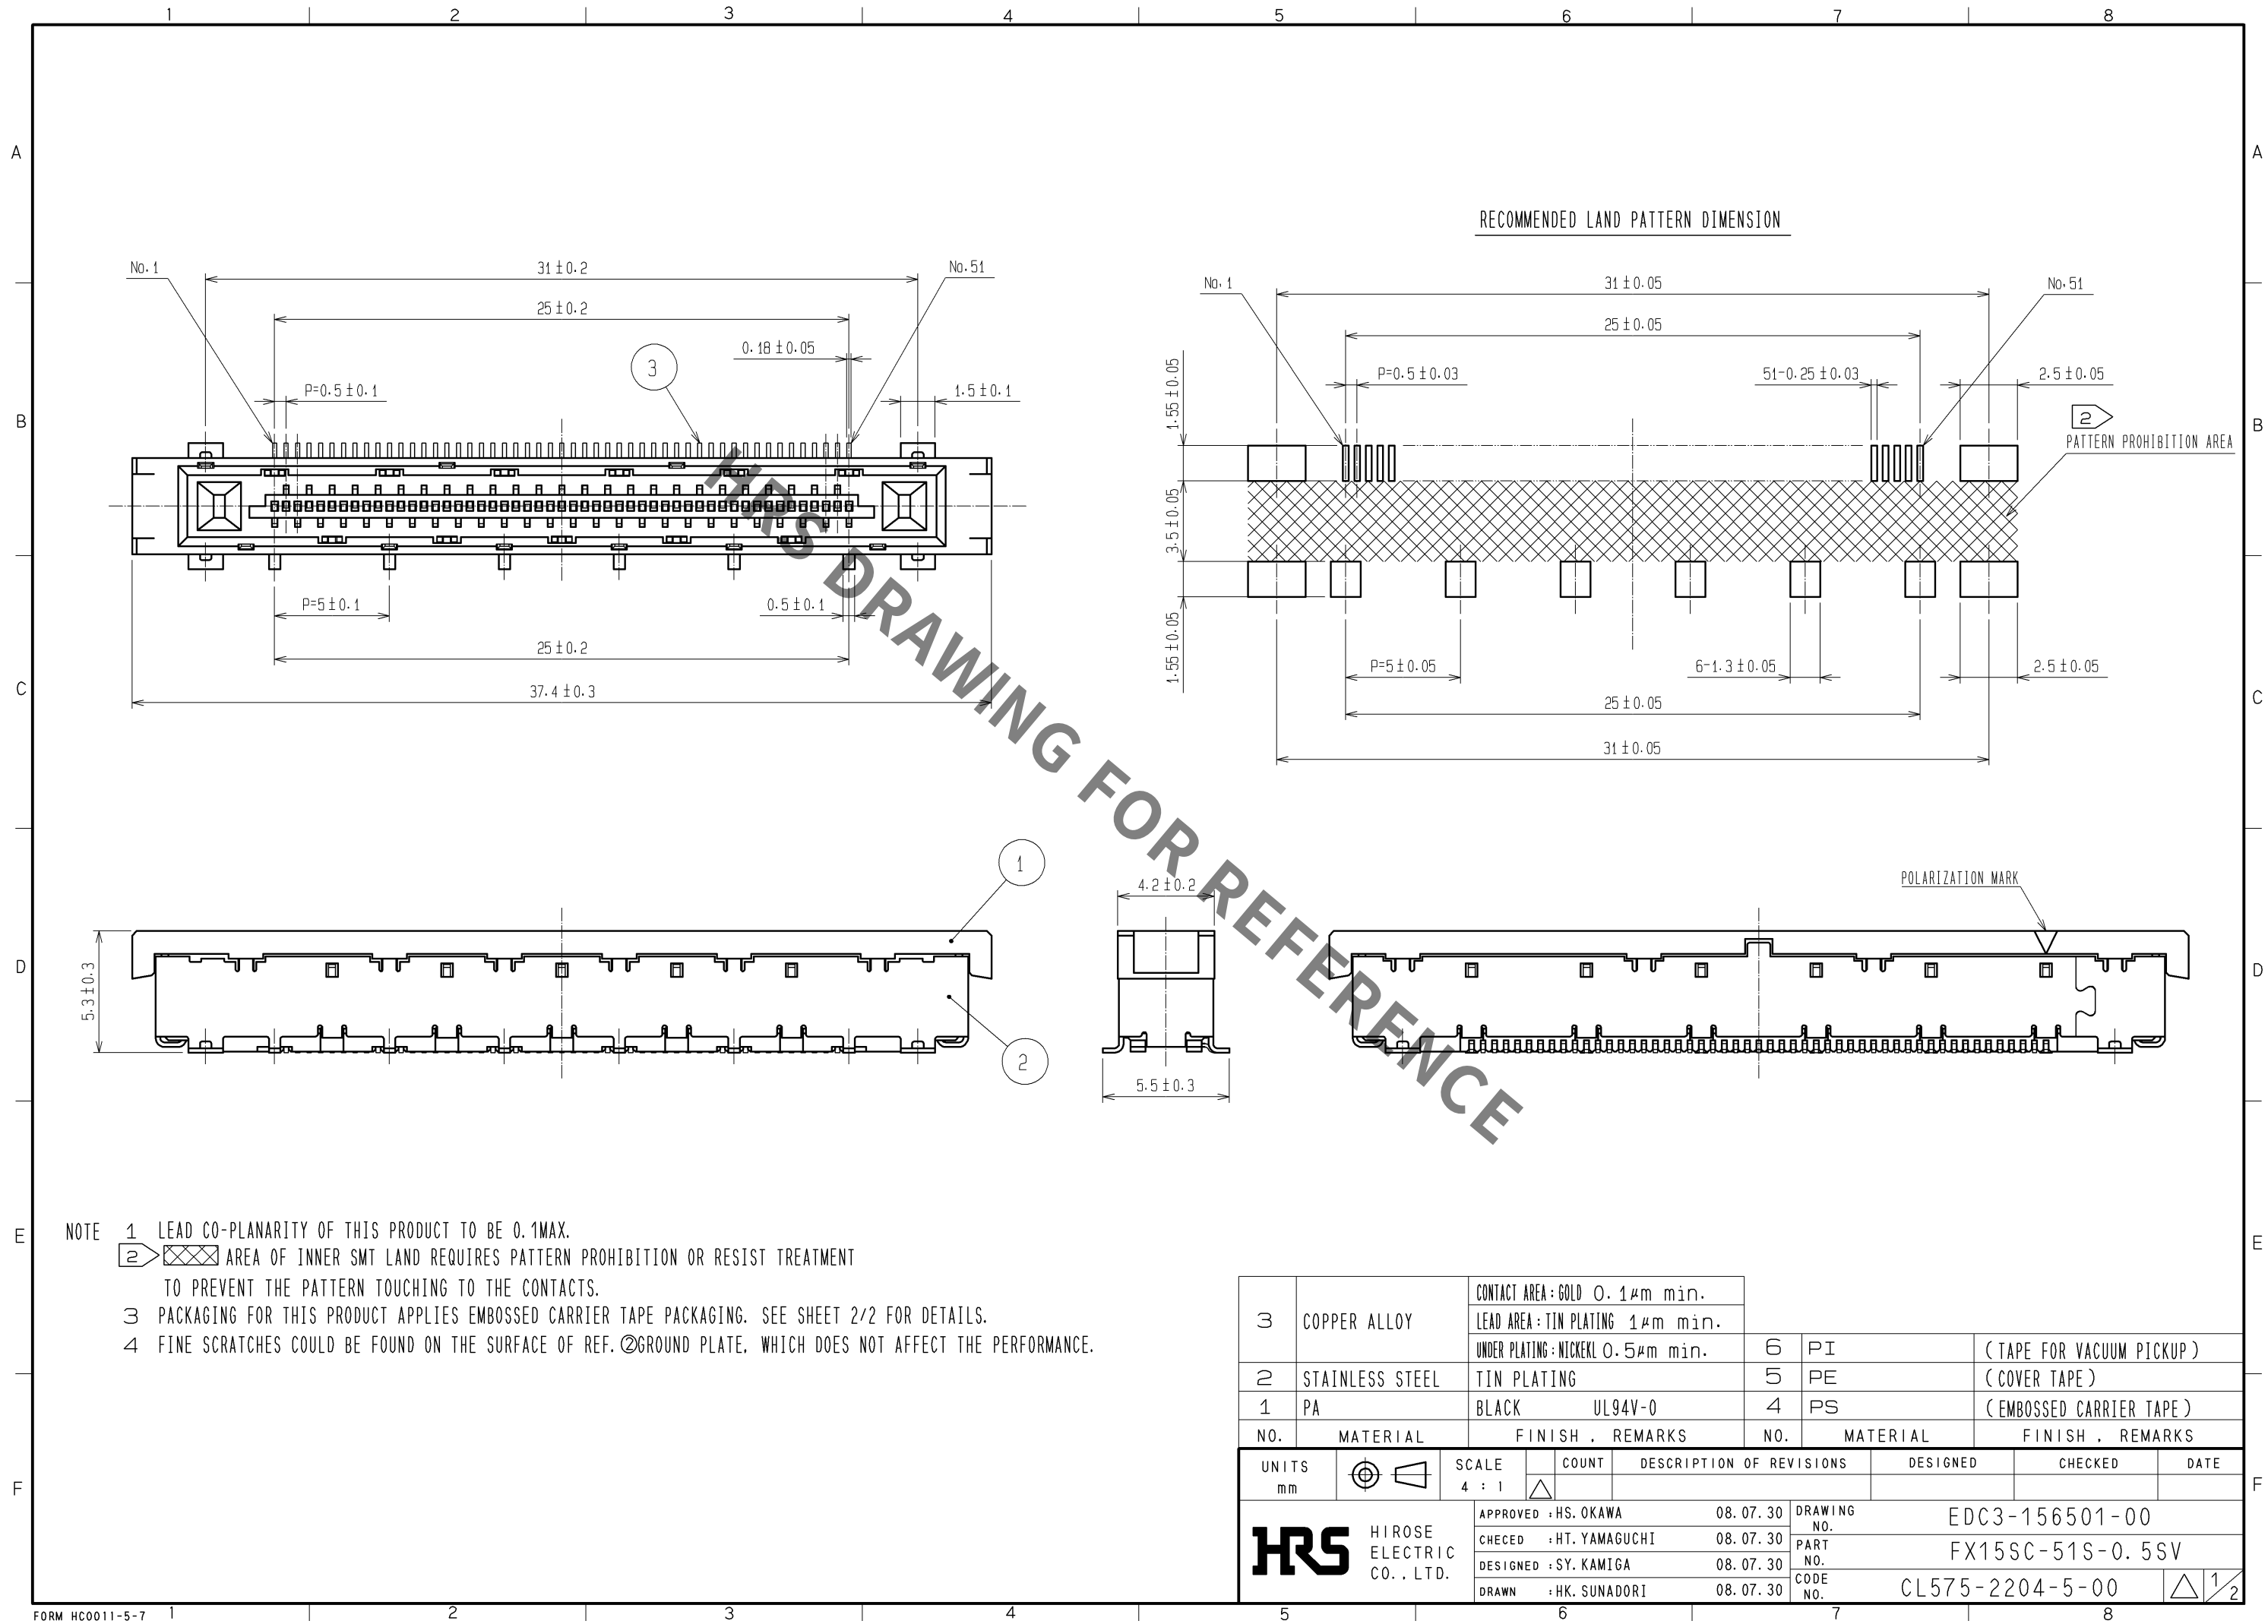


Jun.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.





- NOTE
- 1 LEAD CO-PLANARITY OF THIS PRODUCT TO BE 0.1MAX.
 - 2 AREA OF INNER SMT LAND REQUIRES PATTERN PROHIBITION OR RESIST TREATMENT TO PREVENT THE PATTERN TOUCHING TO THE CONTACTS.
 - 3 PACKAGING FOR THIS PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKAGING. SEE SHEET 2/2 FOR DETAILS.
 - 4 FINE SCRATCHES COULD BE FOUND ON THE SURFACE OF REF. ②GROUND PLATE, WHICH DOES NOT AFFECT THE PERFORMANCE.

3	COPPER ALLOY	CONTACT AREA: GOLD 0.1μm min.							
		LEAD AREA: TIN PLATING 1μm min.							
		UNDER PLATING: NICKEL 0.5μm min.	6	PI	(TAPE FOR VACUUM PICKUP)				
2	STAINLESS STEEL	TIN PLATING	5	PE	(COVER TAPE)				
1	PA	BLACK UL94V-0	4	PS	(EMBOSSED CARRIER TAPE)				
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm			SCALE 4 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.			APPROVED : HS. OKAWA	08. 07. 30	DRAWING NO.		EDC3-156501-00		
			CHECED : HT. YAMAGUCHI	08. 07. 30	PART NO.		FX15SC-51S-0.5SV		
			DESIGNED : SY. KAMIGA	08. 07. 30	CODE NO.		CL575-2204-5-00		
			DRAWN : HK. SUNADORI	08. 07. 30			 1/2		




Jun.1.2022 Copyright 2022 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

SPECIFICATION DRAWING OF PACKING (2 : 1)

THE DIRECTION OF PULLING OUT

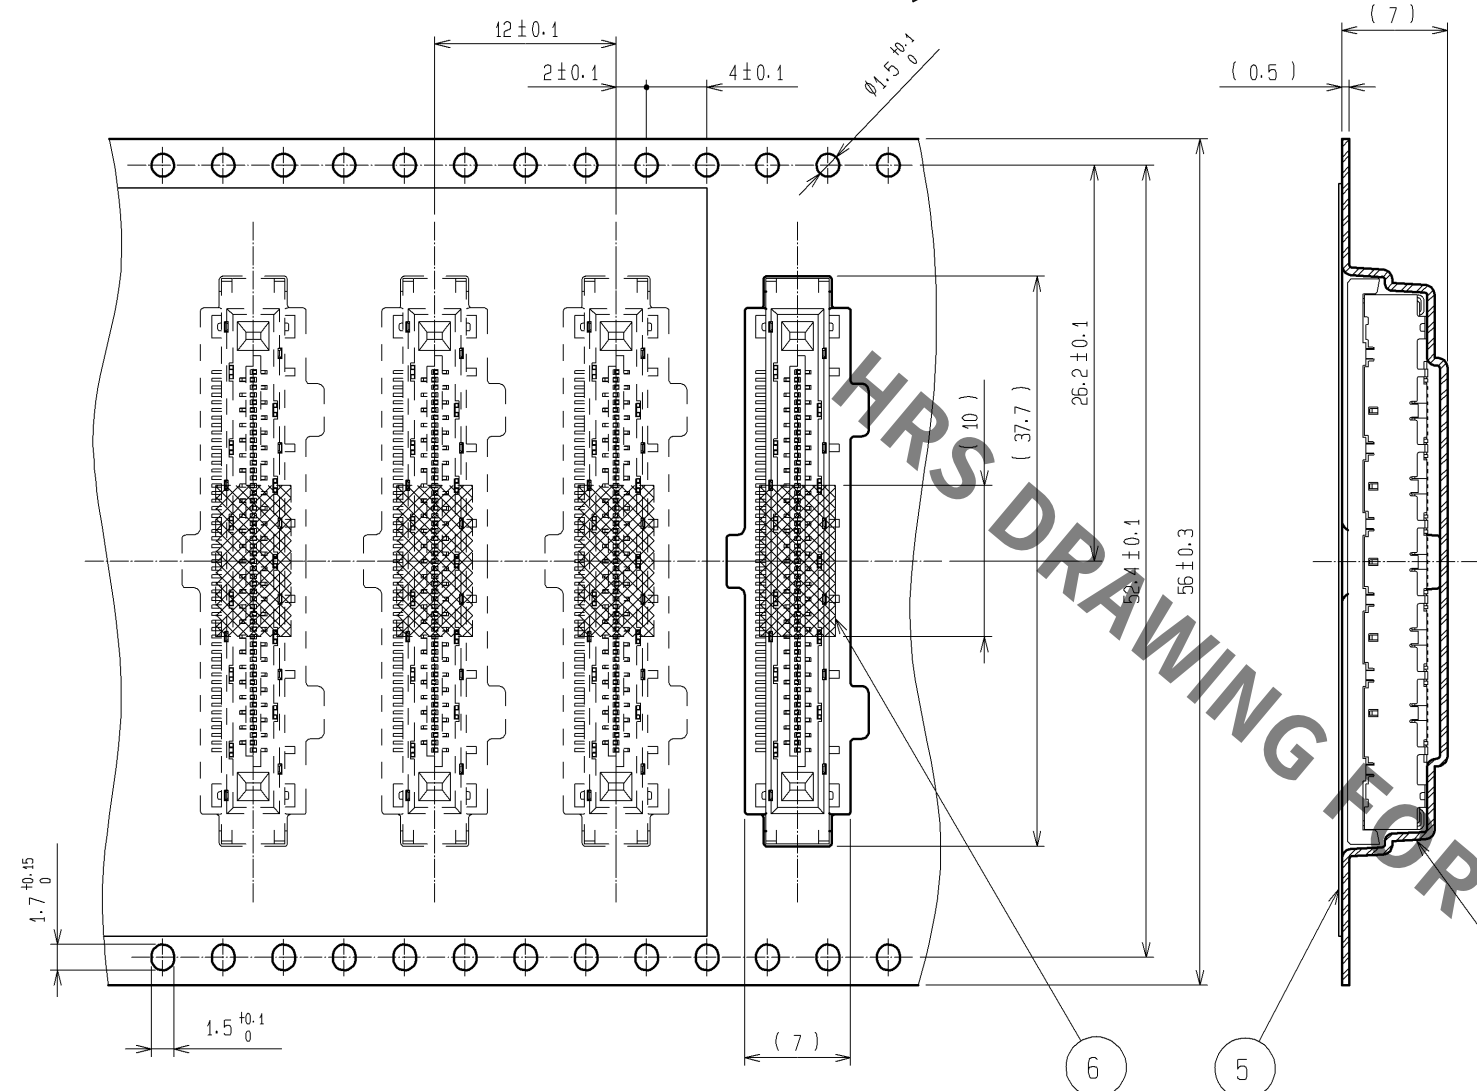

REELED DIMENSION (FREE)

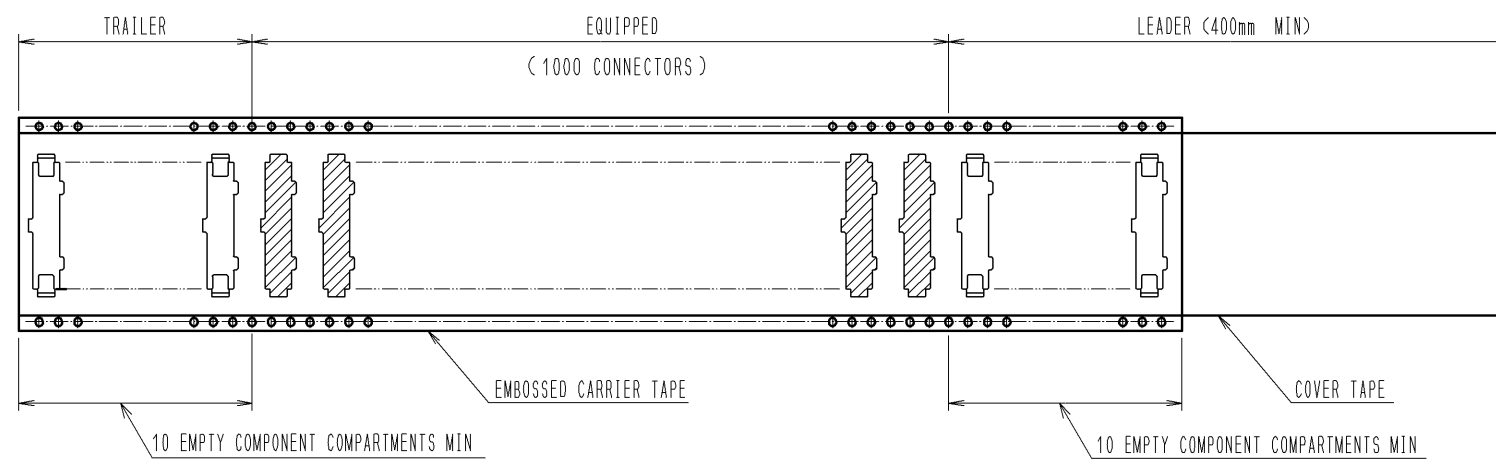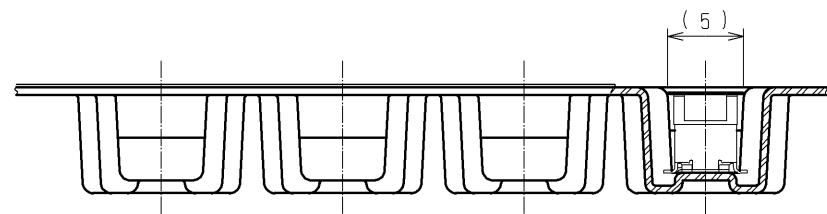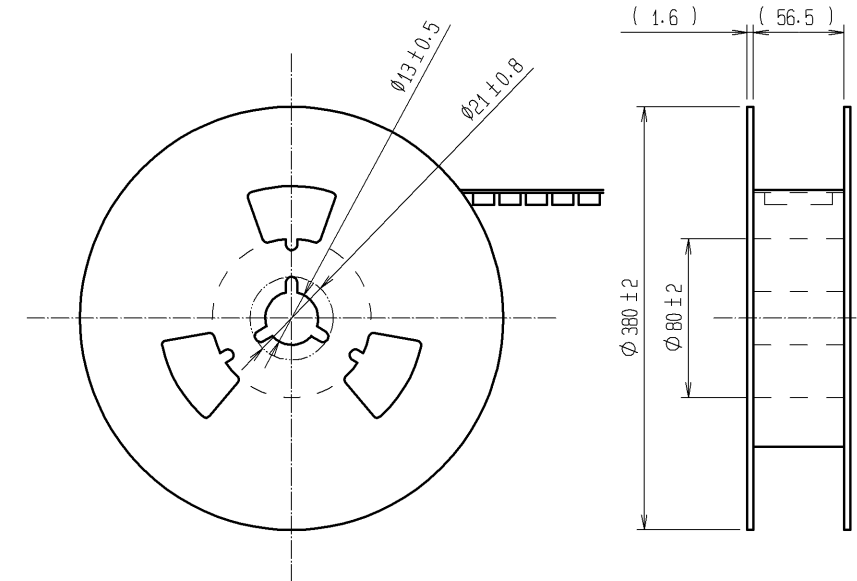

DRAWING NO.	EDC3-156501-00
PART NO.	FX15SC-51S-0.5SV
CODE NO.	CL575-2204-5-00