

GENERAL DESCRIPTION

The LW59XX Series is a Sub- μ A power consumption, high accuracy, low drop-out voltage regulator with Chip Enable Pin, high ripple rejection and fast discharge function.

The current limiter's fold-back circuit operates as a short circuit protection as well as the output current limiter for the output pin.

Output voltage is selectable from 0.8V to 5.0V which fixed by laser trimming technologies, Step=100mV.

The LW59XX is available in SOT23, SOT23-3L, SOT23-5L, SOT-323, SOT-353, DFN1x1-4L and SOT89-3L packages.


FEATURES

- Ultra-Low Power Consumption: 0.65 μ A(Typ.)
- Operating Voltage Range: from 1.6V to 7.0V
- Output Voltage Range: from 0.8V to 5.0V
- Maximum Output Current: 400mA
- Output Accuracy: $\pm 1.5\%$
- Low Dropout Voltage: 640mV@400mA/3.3V
- Low Temperature Coefficient
- Current Limiting Protection
- Output Short-Circuit Protection
- Stable with 1 μ F Output Capacitor
- Fast Discharge Function
- Available in SOT23, SOT23-3L, SOT23-5L, SOT-323, SOT-353, DFN1x1-4L and SOT89-3L Packages

APPLICATIONS





- Battery-Powered Devices
- Portable Consumer Equipment
- Ultra Low Power Applications

TYPICAL APPLICATION CIRCUIT

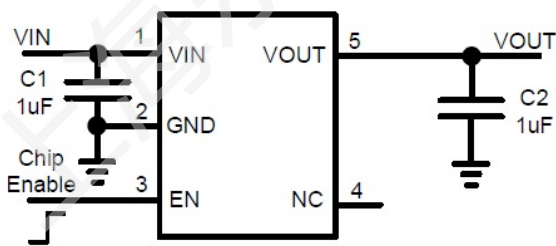

Note: EN must NOT be left floating.

PIN ASSIGNMENT



PIN DESCRIPTION:

PIN No				SYMBOL	DESCRIPTION
SOT23/ SOT23-3L/ SOT-323	SOT23-5L/ SOT-353	DFN1x1-4L	SOT89-3L (Type-A)		
3	1	4	2	VIN	Power Supply Input
1	2	2,E-PAD	1	GND	Ground
--	3	3	--	EN	Chip Enable
--	4	--	--	NC	Not Connected
2	5	1	3	VOUT	Output

MARK INFORMATION:**SOT23/SOT-323/SOT-353****XX: VOLTAGE****YY: DATE CODE**

59XXYY

SOT23-3L/SOT23-5L/SOT89-3L**XX: VOLTAGE****YY: DATE CODE**LW59XX
YYYYY**DFN1x1-4L****X: VOLTAGE**

59X

0.8V	0.9V	1.0V	1.2V	1.5V	1.8V	2.5V	2.8V	3.0V	3.3V	3.6V	4.2V	5.0V
A	R	B	C	D	G	H	J	L	M	P	S	T

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾:(T_A =25℃, unless otherwise specified.)

SYMBOL	ITEM		RATING	UNIT
V _{IN}	Supply Voltage		-0.3~8.0	V
V _{EN}	EN Pin Voltage		-0.3~8.0	V
V _{OUT}	VOUT pin Voltage		-0.3~(V _{IN} +0.3)	V
V _(ESD)	ESD Susceptibility, HBM ⁽²⁾		±4000	V
R _{θJA}	Package Thermal Resistance Θ _{JA} ⁽³⁾	SOT23	363	℃/W
		SOT-323	400	
		SOT-353	395	
		SOT23-3L	330	
		SOT23-5L	325	
		DFN1x1-4L	320	
		SOT89-3L	125	
T _J	Junction Temperature Range		-40~150	℃
T _{STG}	Storage Temperature Range		-40~150	℃
T _{SOLDER}	Lead Temperature (Soldering)		260℃, 10s	

Note:

1. Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability

2. per ANSI/ESDA/JEDEC JS-001

3. Device mounted on FR-4 PCB

RECOMMENDED OPERATING RANGE:

SYMBOL	ITEM	VALUE	UNIT
V _{IN}	VIN Supply Voltage	1.6~7.0	V
V _{EN}	EN Pin Voltage	0~7.0	V
V _{OUT}	VOUT Pin Voltage	0.8~5.0	V
I _{OUT}	Output Current	0~400	mA
T _J	Junction Temperature Range	-40~125	℃

ELECTRICAL CHARACTERISTICS:


($V_{IN}=V_{OUT}+1V$, $V_{OUT}=3.3V$, $C_{IN}=C_{OUT}=1\mu F$, $T_A=25^{\circ}C$, unless otherwise specified.)

Symbol	Parameter	Test Conditions	MIN	TYP	MAX	Units
V_{IN}	Input Voltage		1.6		7.0	V
V_{OUT}	Output Accuracy	$I_{OUT}=1mA$	-1.5		+1.5	%
I_{LIM}	Current Limit ⁽¹⁾	$V_{IN}=4.3V$, $V_{OUT}=3.3V$	410	530		mA
I_Q	Quiescent Current	$V_{IN}=V_{EN}=V_{OUT}+1V$, No Load		0.65	1.0	μA
I_{SHD}	Shutdown Current	$V_{IN}=7.0V$, $V_{EN}=0V$			0.1	μA
V_{DROP}	Dropout Voltage ⁽²⁾	$I_{OUT}=100mA$, $V_{OUT}=3.3V$		130		mV
		$I_{OUT}=200mA$, $V_{OUT}=3.3V$		280		
		$I_{OUT}=300mA$, $V_{OUT}=3.3V$		460		
		$I_{OUT}=400mA$, $V_{OUT}=3.3V$		640		
S_{LINE}	Line Regulation	$V_{IN}=V_{OUT}+1V$ to $7.0V$, $I_{OUT}=1mA$		0.15	0.3	%/V
S_{LOAD}	Load Regulation	$1mA \leq I_{OUT} \leq 400mA$		0.0035	0.006	%/mA
I_{SHORT}	Short Current	$V_{OUT}=0V$		90		mA
V_{ENH}	EN High Voltage	$V_{IN}=1.6V$ to $7.0V$, $I_{OUT}=1mA$	1.6			V
V_{ENL}	EN Low Voltage				0.5	V
T_{STR}	Startup Time	From V_{EN} 'L' $\rightarrow$ 'H' to $95\%*V_{OUT}$, $C_{OUT}=1\mu F$, No Load		800		μs
PSRR	Power Supply Rejection Ratio	$C_{IN}=None$, $I_{OUT}=10mA$	$f=217Hz$	55		dB
			$f=1KHz$	45		
			$f=10KHz$	35		
T_{SD}	Thermal Shutdown	Temperature rising		150		$^{\circ}C$
ΔT_{SD}	TSD Hysteresis	Temperature falling		20		$^{\circ}C$
R_{DSCHG}	R_{ON} of Discharge MOSFET	$V_{IN}=V_{OUT}+1V$, $V_{EN}=0V$		250		Ω

NOTES:

1. Guaranteed by design
2. The dropout voltage is defined as $V_{IN} - V_{OUT}$, when $V_{OUT}=95\%*V_{OUT(NOM)}$

SIMPLIFIED BLOCK DIAGRAM:

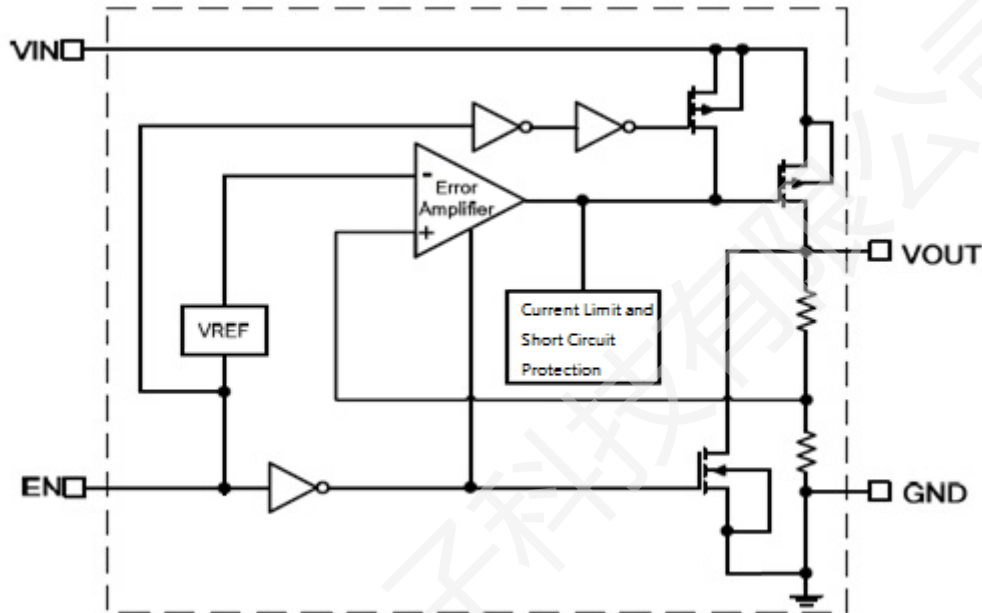

DETAIL OPERATION DESCRIPTION:

The LW59XX is a low power consumption low drop-out voltage regulator. It consists of a current limiter circuit, a driver transistor, a precision voltage reference and an error correction circuit, and is compatible with low ESR ceramic capacitors. The current limiter's fold-back circuit operates as a short circuit protection as well as the output current limiter.

Current Limiting and Short-Circuit Protection


The current limit circuitry prevents damage to the MOSFET switch and the hub downstream port but can deliver load current up to the current limit threshold through the switch. When a heavy load or short circuit is applied to an enabled switch, a large transient current may flow until the current limit circuitry responds. Once this current limit threshold is exceeded the device enters constant current mode until the thermal shutdown occurs or the fault is removed.

TYPICAL OPERATING CHARACTERISTICS:

(Tested under $T_A=25^{\circ}\text{C}$, unless otherwise specified)


1. V_{OUT} vs Temperature

($V_{\text{IN}}=4.3\text{V}$, $V_{\text{OUT}}=3.3\text{V}$, $I_{\text{OUT}}=10\text{mA}$)

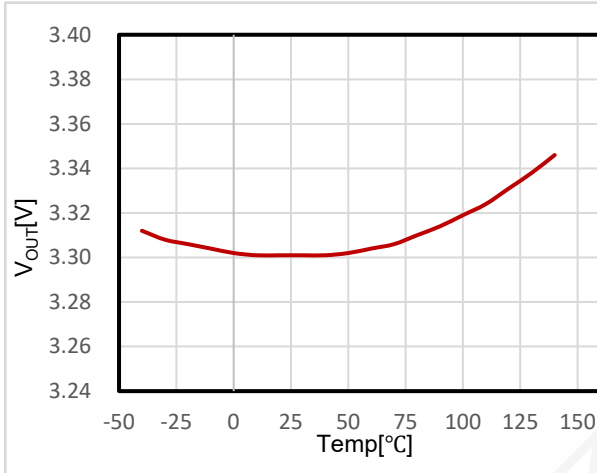


2. I_{Q} vs V_{IN}

($V_{\text{OUT}}=3.3\text{V}$, $I_{\text{OUT}}=0\text{mA}$)

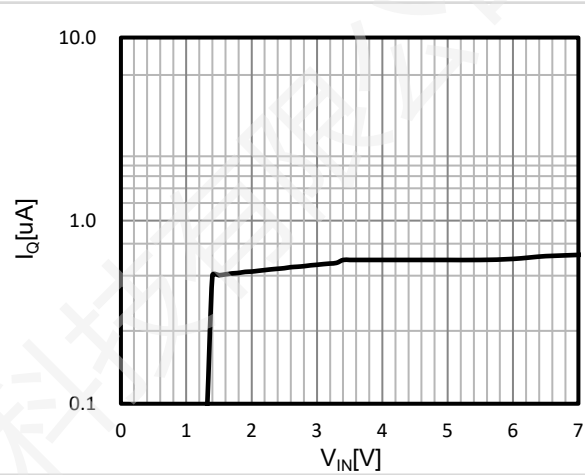


3. V_{OUT} vs I_{OUT}

($V_{\text{IN}}=4.3\text{V}$, $V_{\text{OUT}}=3.3\text{V}$, $I_{\text{OUT}}=0 \rightarrow 400\text{mA}$)

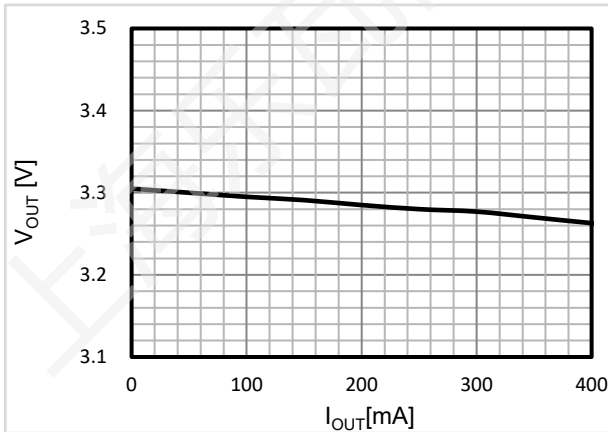


4. V_{OUT} vs V_{IN}

($V_{\text{IN}}=0\text{V} \rightarrow 7.0\text{V}$, $V_{\text{OUT}}=3.3\text{V}$, $I_{\text{OUT}}=1\text{mA}$)

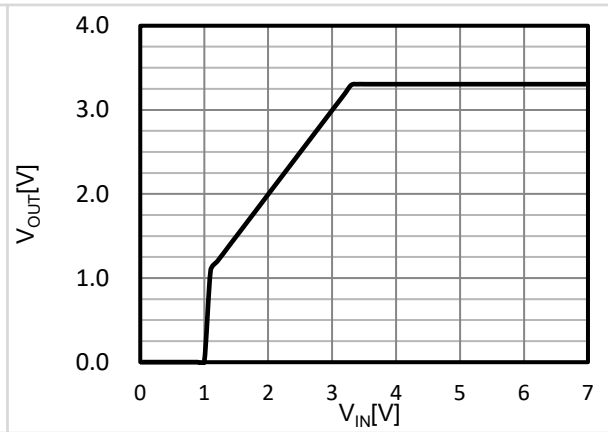


5. Dropout Voltage

($V_{OUT} = 95\% \times 3.3V$, $I_{OUT} = 0 \rightarrow 400mA$)

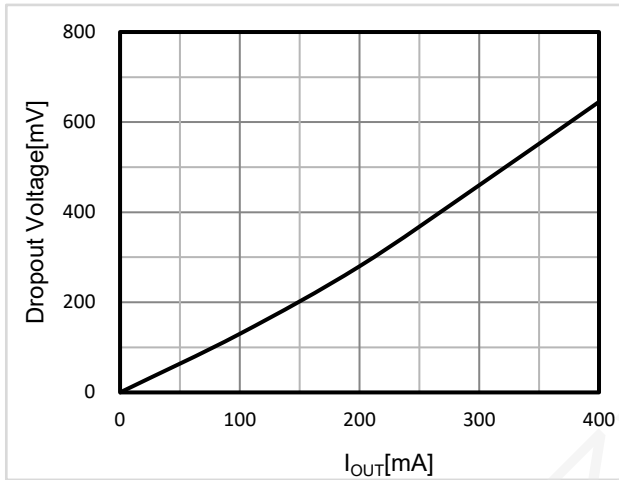


6. PSRR

($V_{IN} = 4.3V$, $V_{OUT} = 3.3V$, $V_{PP} = 1.0V$, $C_{IN} = \text{none}$, $C_{OUT} = 1\mu F$)

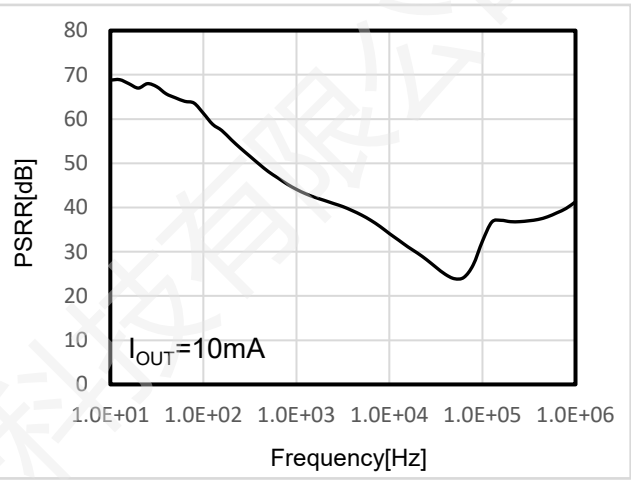


7. Load Transient Response

($V_{IN} = 4.3V$, $V_{OUT} = 3.3V$, $I_{OUT} = 1mA \rightarrow 400mA$)

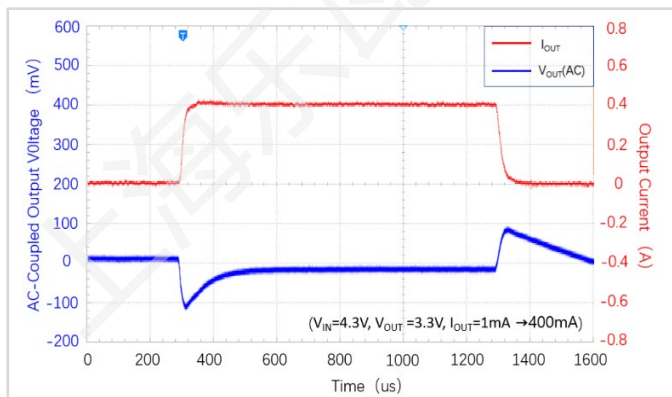


8. Start-Up

($V_{EN}=0V \rightarrow 2.8V$, $V_{OUT}=1.8V$, No load)

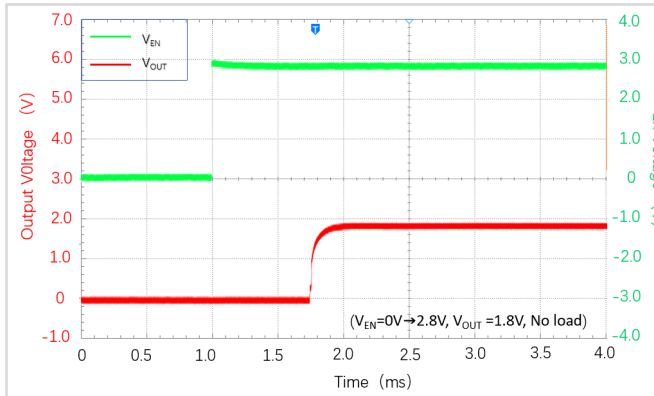


9. Start-Up

($V_{EN}=0V \rightarrow 2.8V$, $V_{OUT}=1.8V$, $R_{OUT}=4.5\Omega$)

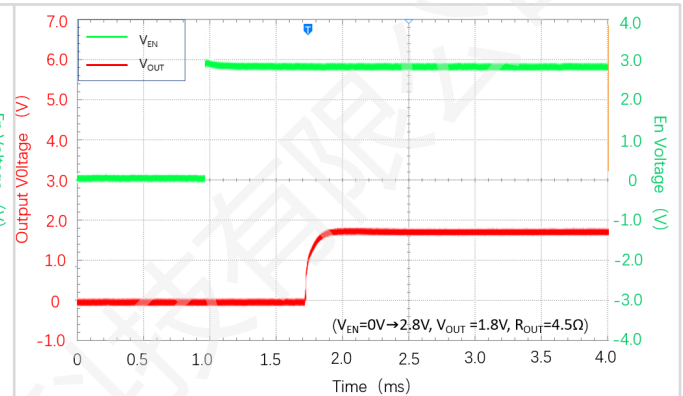


10. Start-Up

($V_{EN}=0V \rightarrow 4.3V$, $V_{OUT}=3.3V$, No load)

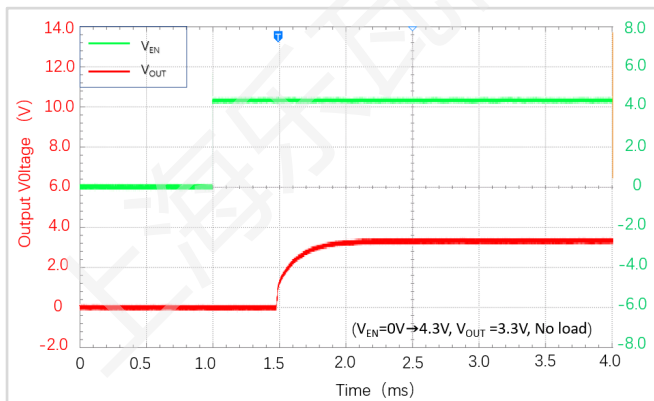


11. Start-Up

($V_{EN}=0V \rightarrow 4.3V$, $V_{OUT}=3.3V$, $R_{OUT}=8.25\Omega$)

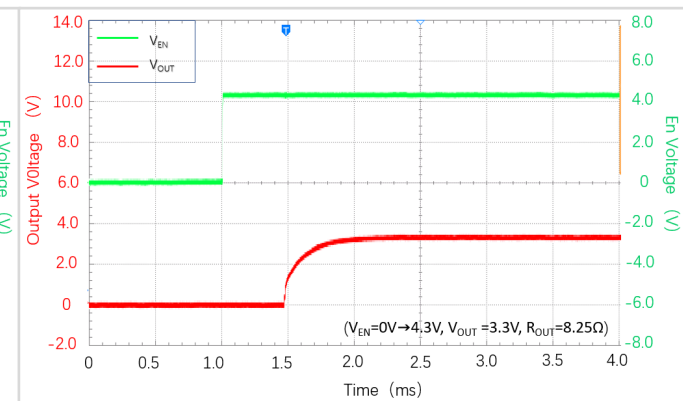


12. Shut-Down

($V_{EN}=2.8V \rightarrow 0V$, $V_{OUT}=1.8V$, No load)

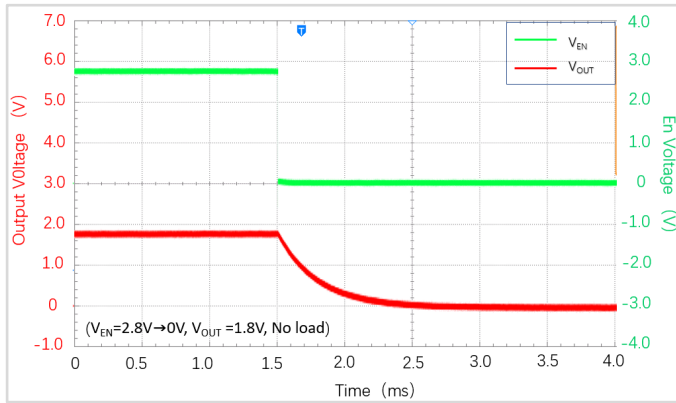


13. Shut-Down

($V_{EN}=2.8V \rightarrow 0V$, $V_{OUT}=1.8V$, 4.5Ω)

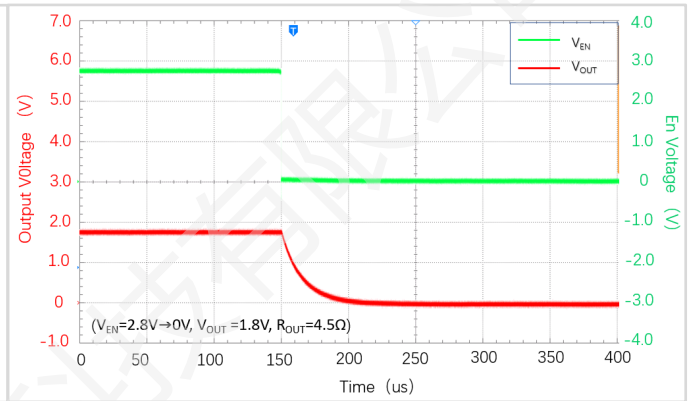


14. Shut-Down

($V_{EN}=4.3V \rightarrow 0V$, $V_{OUT}=3.3V$, No load)

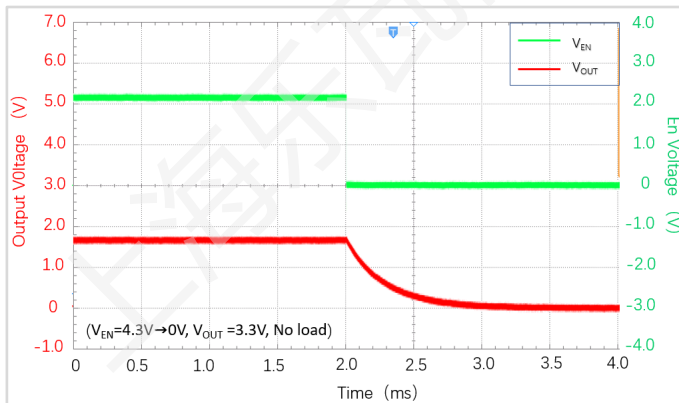

15. Shut-Down

($V_{EN}=4.3V \rightarrow 0V$, $V_{OUT}=3.3V$, $R_{OUT}=8.25\Omega$)

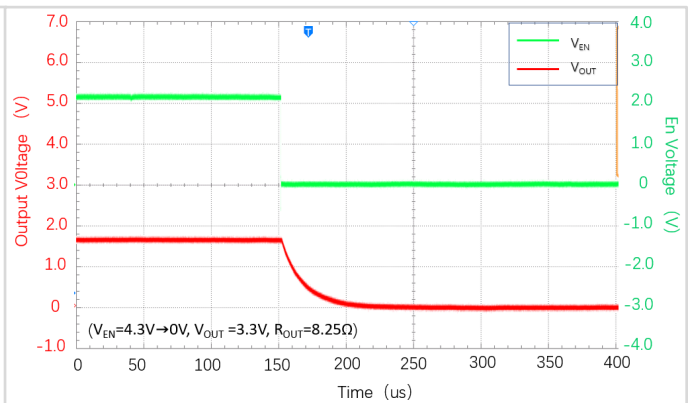

APPLICATION INFORMATION:

- **Input Capacitor Selection**

Like any low-dropout regulator, the external capacitors used with the LW59XX Series must be carefully selected for regulator stability and performance. Using a capacitor whose value is $\geq 1\mu\text{F}$ on the LW59XX Series input and the amount of capacitance can be increased without limit. An at least $10\mu\text{F}$ input capacitor is needed if input ripple voltage $V_{pp} > 1\text{V}$. The input capacitor must be located a distance less than 0.5 inch from the input pin of the IC and returned to a clean analog ground. Any good quality ceramic or tantalum can be used for this capacitor. The capacitor with larger value and lower ESR (equivalent series resistance) provides better PSRR and line-transient response.

- **Layout considerations**

To improve ac performance such as PSRR, output noise, and transient response, it is recommended that the PCB be designed with separate ground planes for VIN and VOUT, with each ground plane connected only at the GND pin of the device.

- **Output Capacitor Selection**

The output capacitor must meet both requirements for minimum amount of capacitance and ESR in all LDOs application. The LW59XX Series is designed specifically to work with low ESR ceramic output capacitor in space-saving and performance consideration. Using a ceramic capacitor whose value is at least $1\mu\text{F}$ on the LW59XX Series output ensures stability. An appropriate output capacitor can reduce noise and improve load transient response and PSRR. The output capacitor should be located not more than 0.5 inch from the VOUT pin of the LW59XX Series and returned to a clean analog ground.

ORDER INFORMATION:

LW59①②③④⑤⑥

Designator	Item	Symbol	Description
①②	Output Voltage	10~50	e.g. 2.8V → ①=2, ②=8
③④⑤⑥	Packages	N23C	SOT23
		N23D	SOT23-3L
		A23E	SOT23-5L
		NW2C	SOT-323
		NW5E	SOT-353
		N11E	DFN1x1-4L
		A89C	SOT89-3L(Type-A)

Part #	Output Voltage	Package	Shipping
LW5910N23C	1.0V	SOT23	3000 Pcs/ Tape & Reel
LW5912N23C	1.2V		
LW5915N23C	1.5V		
LW5918N23C	1.8V		
LW5920N23C	2.0V		
LW5925N23C	2.5V		
LW5928N23C	2.8V		
LW5930N23C	3.0V		
LW5933N23C	3.3V		
LW5936N23C	3.6V		
LW5942N23C	4.2V		
LW5950N23C	5.0V		
LW5910N23D	1.0V	SOT23-3L	3000 Pcs/ Tape & Reel
LW5912N23D	1.2V		
LW5915N23D	1.5V		
LW5918N23D	1.8V		
LW5920N23D	2.0V		
LW5925N23D	2.5V		
LW5928N23D	2.8V		
LW5930N23D	3.0V		
LW5933N23D	3.3V		
LW5936N23D	3.6V		
LW5942N23D	4.2V		
LW5950N23D	5.0V		


Part #	Output Voltage	Package	Shipping
LW5910A23E	1.0V	SOT23-5L	3000 Pcs/ Tape & Reel
LW5912A23E	1.2V		
LW5915A23E	1.5V		
LW5918A23E	1.8V		
LW5920A23E	2.0V		
LW5925A23E	2.5V		
LW5928A23E	2.8V		
LW5930A23E	3.0V		
LW5933A23E	3.3V		
LW5936A23E	3.6V		
LW5942A23E	4.2V		
LW5950A23E	5.0V		
LW5910NW2C	1.0V	SOT-323	3000 Pcs/ Tape & Reel
LW5912NW2C	1.2V		
LW5915NW2C	1.5V		
LW5918NW2C	1.8V		
LW5920NW2C	2.0V		
LW5925NW2C	2.5V		
LW5928NW2C	2.8V		
LW5930NW2C	3.0V		
LW5933NW2C	3.3V		
LW5936NW2C	3.6V		
LW5942NW2C	4.2V		
LW5950NW2C	5.0V		
LW5910NW5E	1.0V	SOT-353	3000 Pcs/ Tape & Reel
LW5912NW5E	1.2V		
LW5915NW5E	1.5V		
LW5918NW5E	1.8V		
LW5920NW5E	2.0V		
LW5925NW5E	2.5V		
LW5928NW5E	2.8V		
LW5930NW5E	3.0V		
LW5933NW5E	3.3V		
LW5936NW5E	3.6V		
LW5942NW5E	4.2V		
LW5950NW5E	5.0V		

Part #	Output Voltage	Package	Shipping
LW5910N11E	1.0V	DFN1x1-4L	10000 Pcs/ Tape & Reel
LW5912N11E	1.2V		
LW5915N11E	1.5V		
LW5918N11E	1.8V		
LW5920N11E	2.0V		
LW5925N11E	2.5V		
LW5928N11E	2.8V		
LW5930N11E	3.0V		
LW5933N11E	3.3V		
LW5936N11E	3.6V		
LW5942N11E	4.2V		
LW5950N11E	5.0V		
LW5910A89C	1.0V	SOT89-3L (Type-A)	1000 Pcs/ Tape & Reel
LW5912A89C	1.2V		
LW5915A89C	1.5V		
LW5918A89C	1.8V		
LW5920A89C	2.0V		
LW5923A89C	2.3V		
LW5925A89C	2.5V		
LW5928A89C	2.8V		
LW5930A89C	3.0V		
LW5933A89C	3.3V		
LW5936A89C	3.6V		
LW5942A89C	4.2V		
LW5950A89C	5.0V		

If customers have special output voltage requirements, please contact us.



PACKAGE OUTLINE:

SOT23 Package


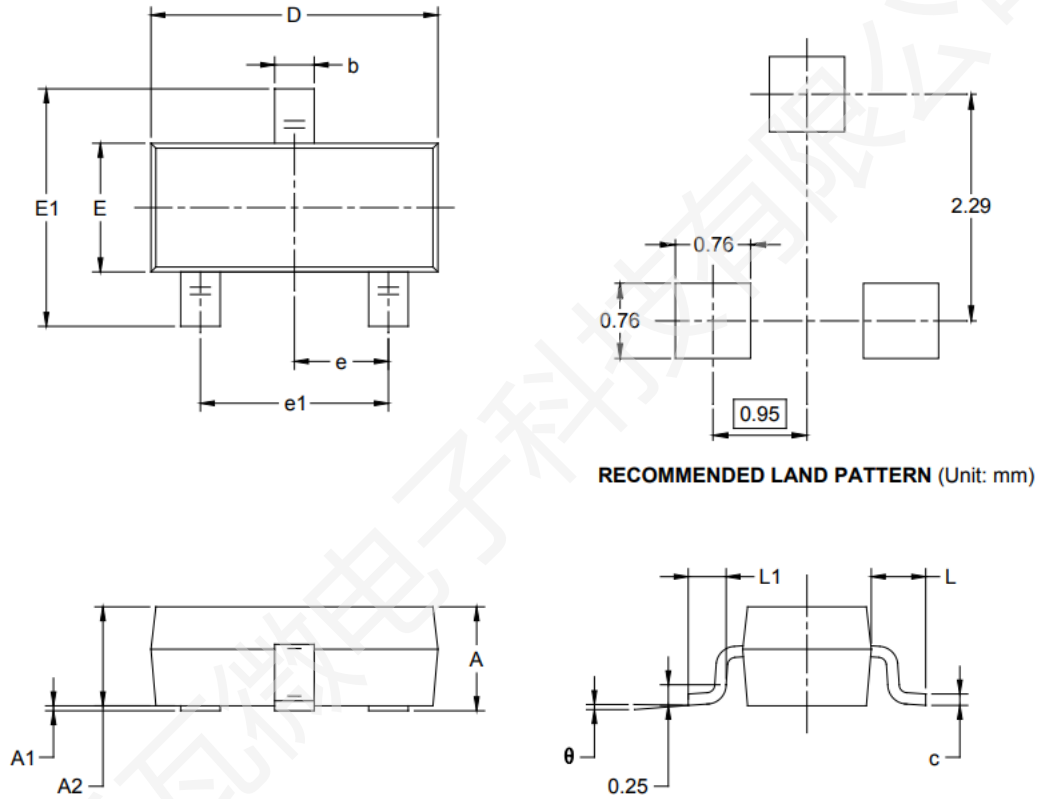


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.550 REF		0.022 REF	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

SOT23-3L Package

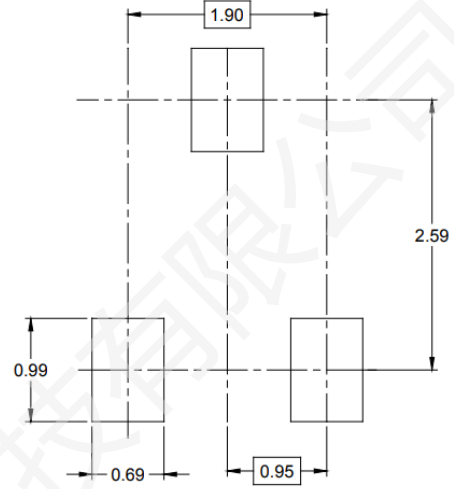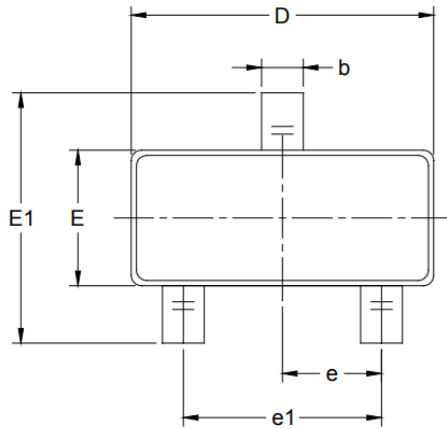


RECOMMENDED LAND PATTERN (Unit: mm)

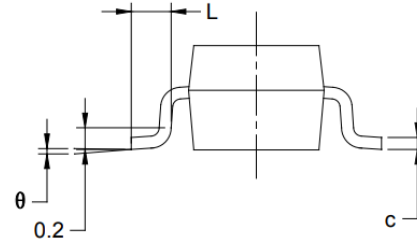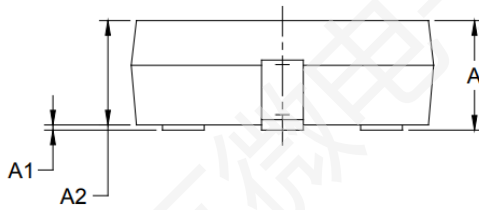


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT23-5L Package

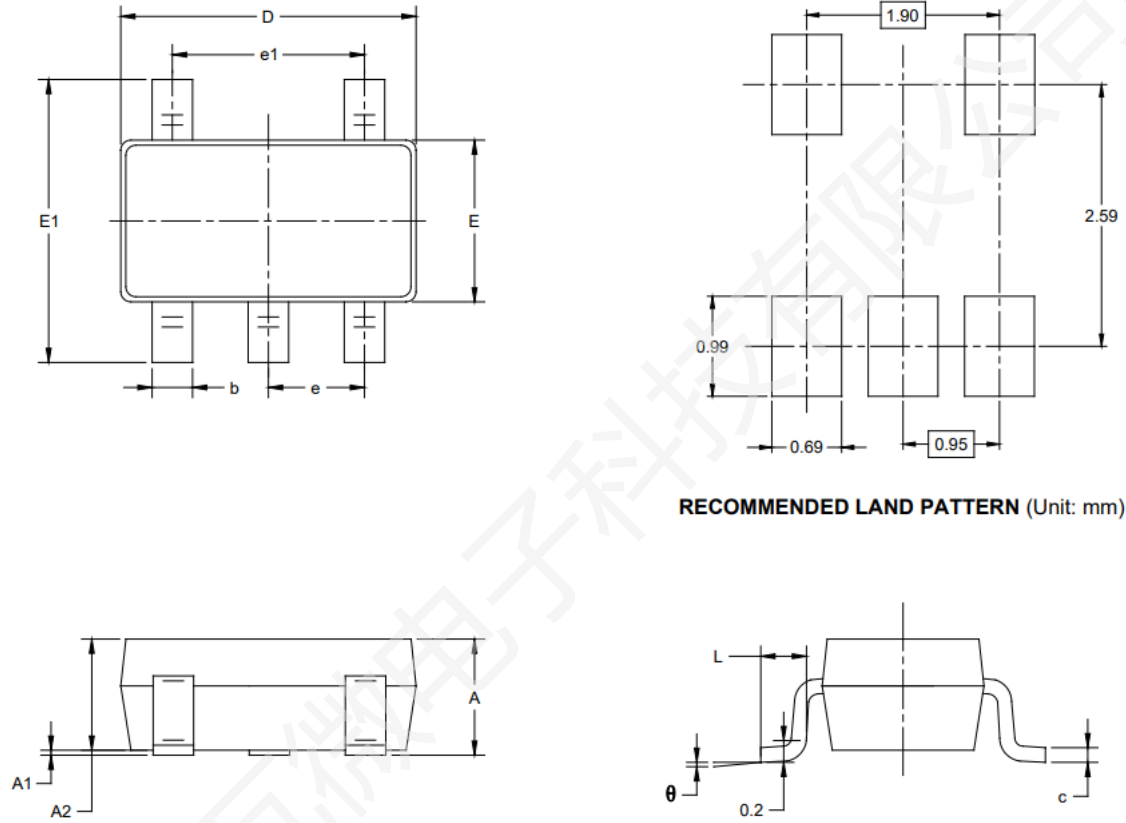


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT-323 Package

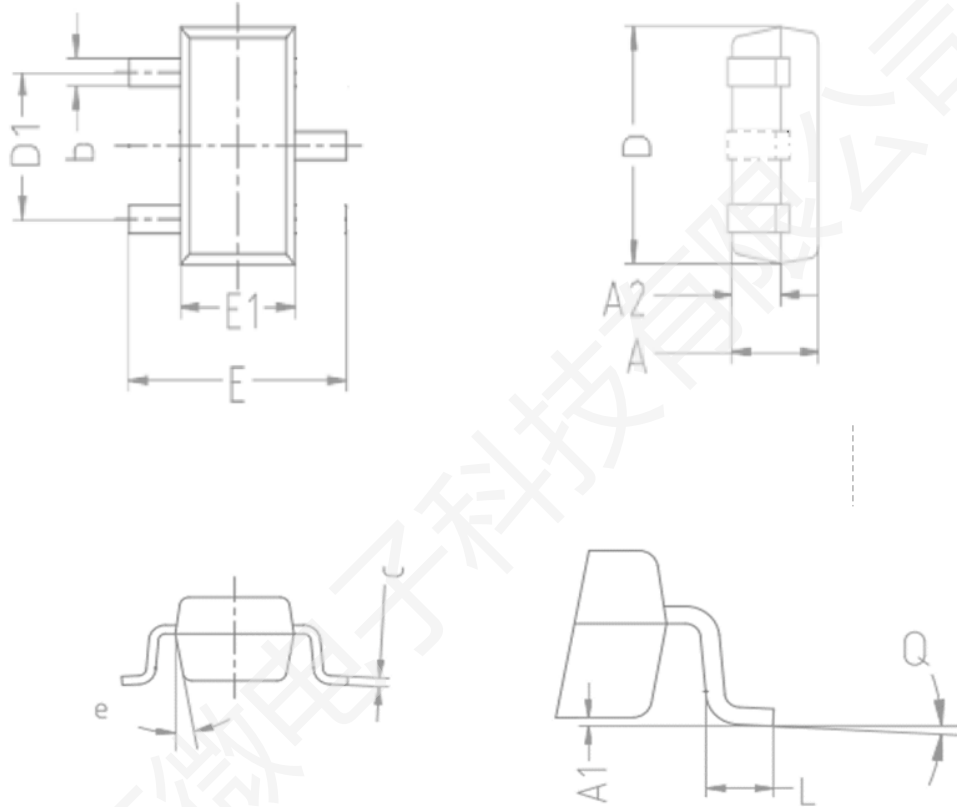


COMMON IN DIMENSION (MM)			
Symbol	Min	Nom	Max
A	0.910	0.960	1.010
A1	0.010	0.060	0.150
A2	0.500	0.540	0.600
b	0.200	0.250	0.310
C	0.100	0.110	0.120
D	2.050	2.100	2.250
D1	1.250	1.300	1.350
E	2.390	2.400	2.410
E1	1.200	1.260	1.350
L	0.260	0.360	0.460
e	10°		
Q	0°	4°	8°

SOT-353 Package

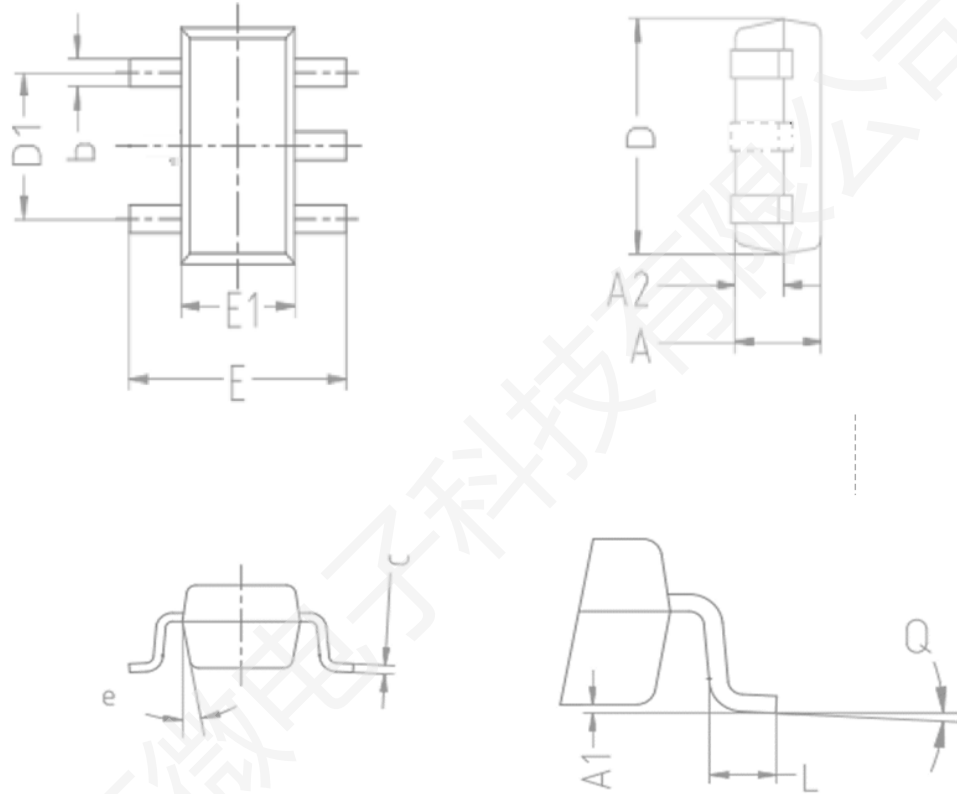


COMMON IN DIMENSION (MM)			
Symbol	Min	Nom	Max
A	0.910	0.960	1.010
A1	0.010	0.060	0.150
A2	0.500	0.540	0.600
b	0.200	0.250	0.310
C	0.100	0.110	0.120
D	2.050	2.100	2.250
D1	1.250	1.300	1.350
E	2.390	2.400	2.410
E1	1.200	1.260	1.350
L	0.260	0.360	0.460
e	10°		
Q	0°	4°	8°

DFN1x1-4L Package

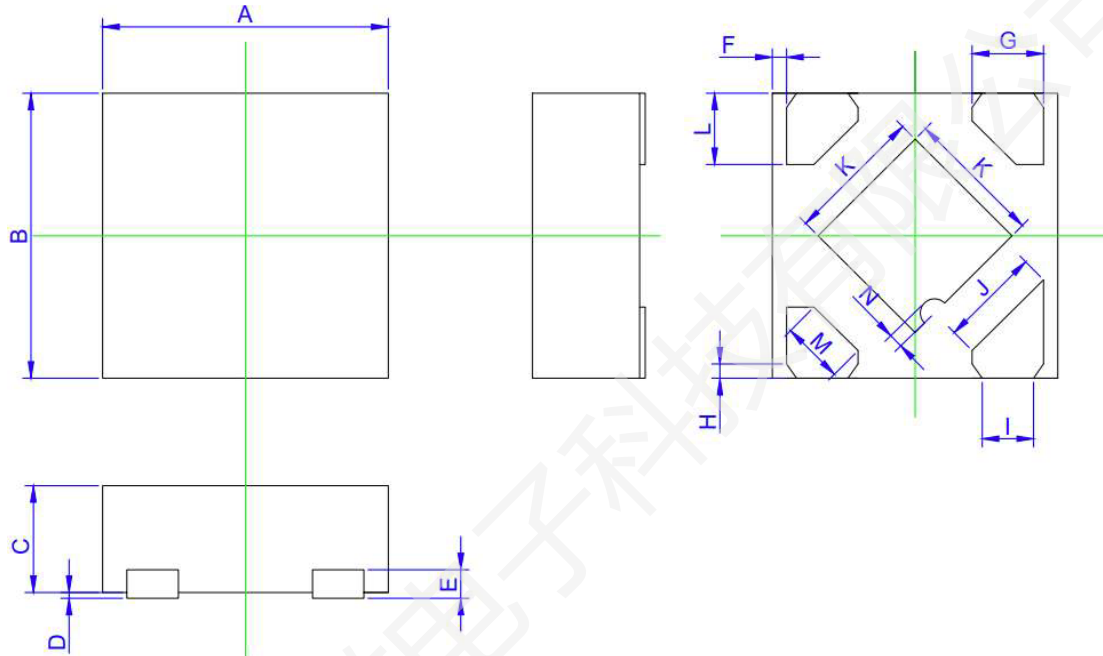

符号	标准	下公差	上公差	下限值	上限值
A	1.0	0.03	0.03	0.97	1.03
B	1.0	0.03	0.03	0.97	1.03
C	0.375	0.03	0.03	0.345	0.405
D	0.02	0.005	0.02	0.015	0.04
E	0.10REF				
F	0.05REF				
G	0.25REF				
H	0.05REF				
I	0.18REF				
J	0.34REF				
K	0.48REF				
L	0.25REF				
M	0.245REF				
N	0.06REF				

SOT89-3L Package

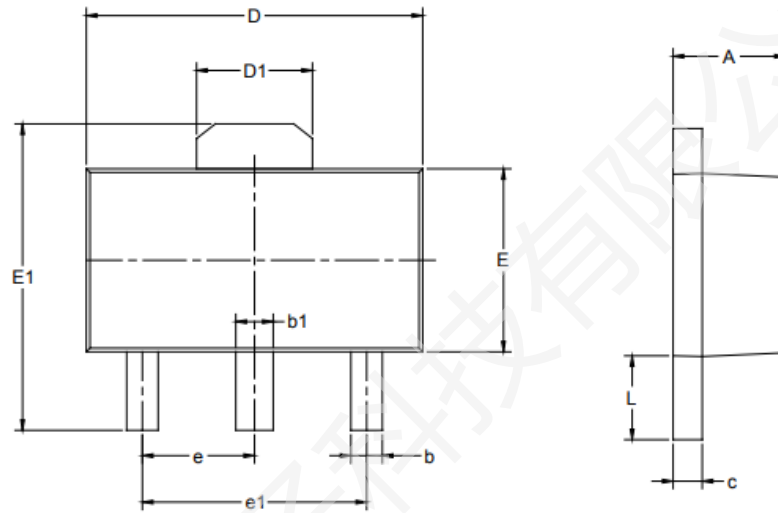

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047

Revision History:

Revision	Date	Descriptions
Rev 1.0	Dec.2020	Initial Version
Rev 1.1	Apr.2021	Update Electrical Characteristics and Typical Operating Characteristics
Rev 1.2	May.2021	Update Typical Operating Characteristics Based on Mass Lot Data
Rev 1.3	Jan.2022	Redefine Order Information
Rev 1.4	Mar.2022	Update layout
Rev 1.5	Jun.2022	Adjust Typical Operating Characteristics 7-9
Rev 1.6	Aug.2022	Update Typical Operating Characteristics 10-15
Rev 1.7	Sep.2022	Adjust Order Information
Rev 1.8	Jun.2023	Update Typical Operating Characteristics
Rev 1.9	Jun.2024	Update New Packages
Rev 2.0	Sep.2025	Update New Packages

DISCLAIMER:

- The product is not intended for use in applications that require extraordinary levels of quality and reliability, such as military, aviation/aerospace and life-support systems or other applications whose failure can be reasonably expected to result in serious physical or material damage.
- Lewa-Micro assumes no responsibility for equipment failures that result from using products at parameters that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any Lewa-Micro products described or contained herein.
- Specifications of any and all Lewa-Micro products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- Lewa-Micro strives to supply high-quality and high-reliability products. However, any and all semiconductor products have a certain probability of failure. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures including but not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- To comply with the compliance requirements of relevant export control laws and regulations, if any Lewa-Micro product (including technical data and services) stated herein is subject to relevant export control laws and regulations, it is recommended that the customer apply for and obtain an export license from the competent authority in advance in accordance with the requirements of relevant laws, and do not conduct export activities without obtaining the license. If the customer fails to comply with the aforementioned compliance requirements, all legal liabilities arising therefrom shall be borne solely by the customer.
- To protect Lewa-Micro's intellectual property rights and the security of commercial information, without the prior written permission of Lewa-Micro, no part of this document shall be reproduced or disseminated in any form or by any means (including photocopying, recording, and other electronic or mechanical means, as well as various information storage and retrieval systems). For unauthorized reproduction or dissemination, Lewa-Micro reserves the right to pursue legal liability.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. Lewa-Micro believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc.

Mailing Address: Unit 02&04&05, 10th Floor, Building 5, No.666 Shengxia Road, No.122 Yindong Road,
China (Shanghai) Pilot Free Trade Zone
Shanghai Lewa Micro-electronics Technology Co., Ltd