


REV.	ECN. NO.	APPD.

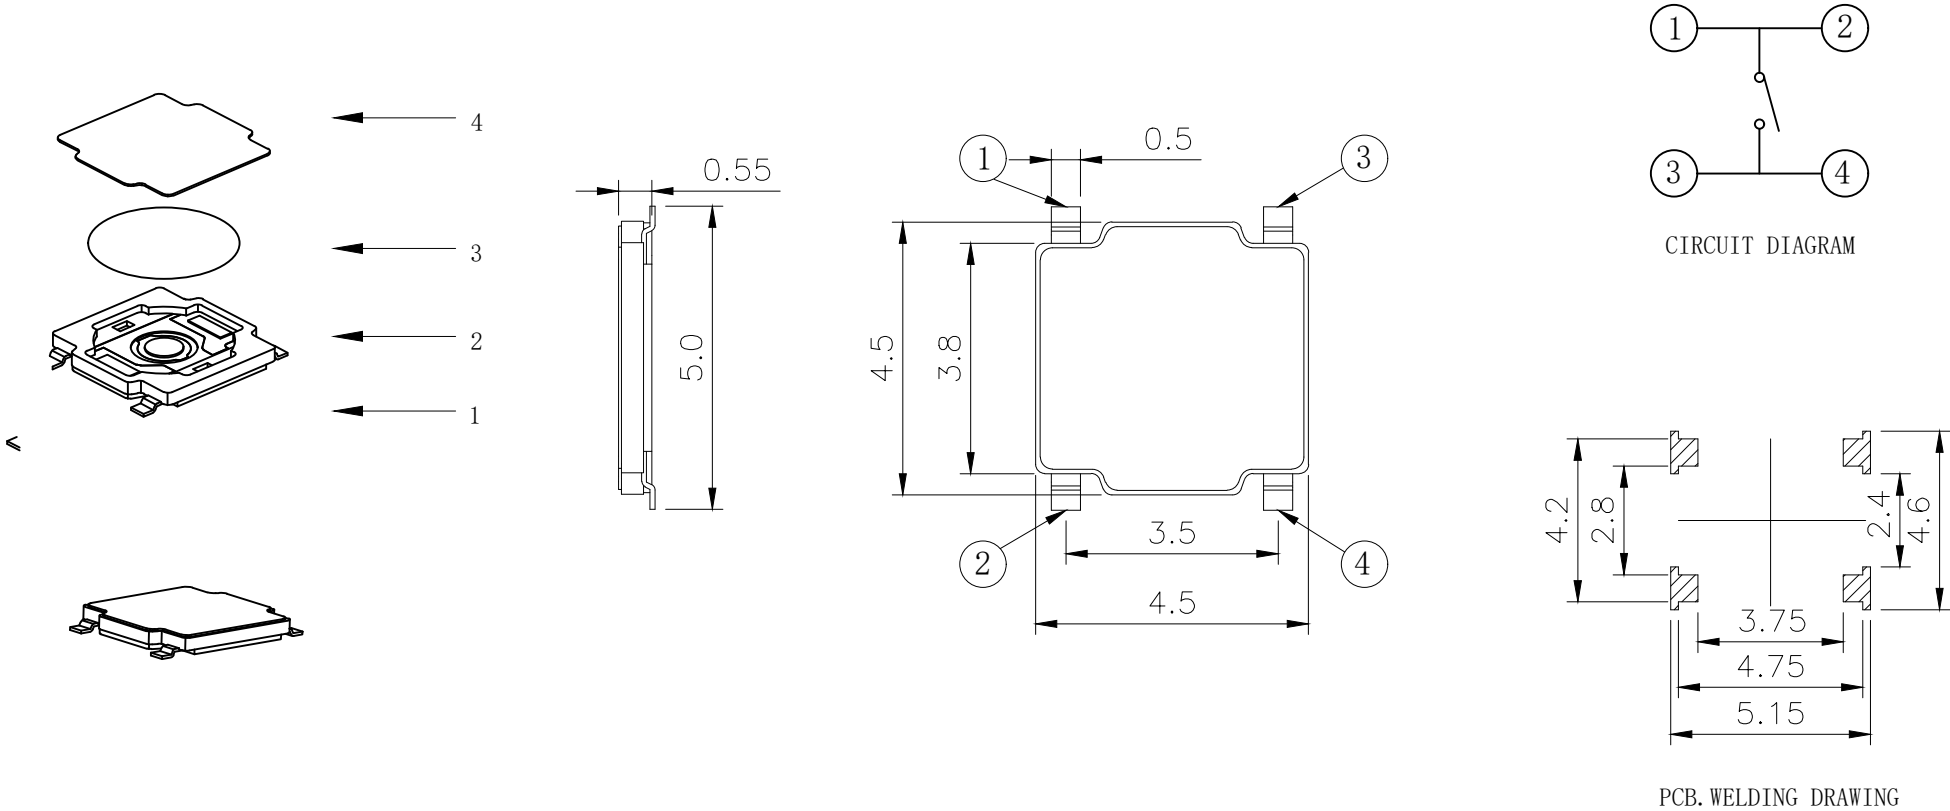

Specification


Operating Life	100,000
Contact rating	50mA@12V DC.
Insulation resistance	1011Ω min.
Contact resistance	100mΩ max.initial.
Dielectric Strength	250 V AC(1mm)
Travel	0.15±0.1mm
Storage Temperature	- 30° C to 80° C

Packaging:
a reel of 5,000 pieces

C	DOMES	Stainless Steel	1	Plated Ag
B	HOUSING	LCP	1	Black
A	CARDS	Phosphor copper	1	Plated Ag
ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR

Mechanical

P/N	Operating Force (gf)	Height mm	Button	Load Shape (G, J, T)	Ground pin (0, 1)	Pegs Option (0, 1)
YTS1H001	2	250±50		G	0 (None)	0 (none)
	1	180±50	A	0.55		

X. ±0.50	X. ° ±2°	UNITS mm	 深圳市怡远科技有限公司 SHENZHEN YIYUAN TECHNOLOGY CO.,LTD					
.X ±0.30	.X° ±1°							
.XX ±0.10	.XX° ±0.5°	MAT'L 		PART NO. YTS1H001	TITLE: TACTILE SWITCH			
.XXX ±0.05								
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF YIYUAN TECHNOLOGY CO.,LTD AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF YIYUAN TECHNOLOGY CO.,LTD		FINISH 	APPD: ROGER		DWG NO. : YTS1H001			
		Q' TY 	CHKD: ROC					
			DR: BILLY WANG 2020/08/21					
					SCALE	SHEET	REV.	
					1/1	1/1	A1	