

General Description

The SYV843A is a high efficiency 1.5MHz synchronous step down DC/DC regulator capable of delivering up to 3A output current. The SYV843A can operate over a wide input voltage range from 2.7V to 5.5V and integrates main switch and synchronous switch with very low $R_{DS(ON)}$ to minimize the conduction loss.

Low output voltage ripple, small external inductor and capacitor sizes are achieved with 1.5MHz switching frequency.

Ordering Information

SYV843

└─ Temperature Code
└─ Package Code
└─ Optional Spec Code

Ordering Number	Package type	Note
SYV843AQWC	QFN1.5×1.5-7	--

Features

- 2.7~5.5V Input Voltage Range
- 65μA Low Quiescent Current
- Ultra Fast Load Transient Speed
- Low $R_{DS(ON)}$ for Internal Switches (Top/Bottom) 85mΩ /50mΩ
- High Switching Frequency 1.5MHz Minimizes the External Components
- Internal Soft-start Limits the Inrush Current
- Hic-cup Mode Short Circuit Protection
- Output Auto Discharge Function
- RoHS Compliant and Halogen Free
- Compact Package: QFN1.5×1.5-7

Applications

- Smart Phone
- LCD TV
- Set Top Box
- Mini-notebook PC
- Access Point Router

Typical Applications

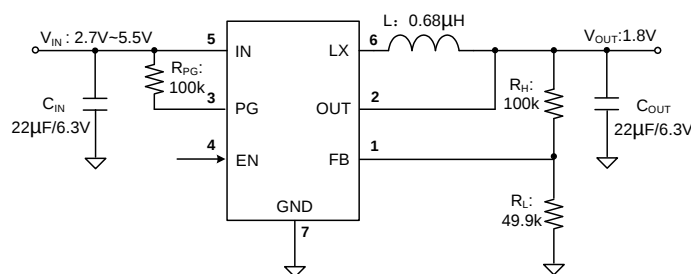


Figure1. Schematic Diagram


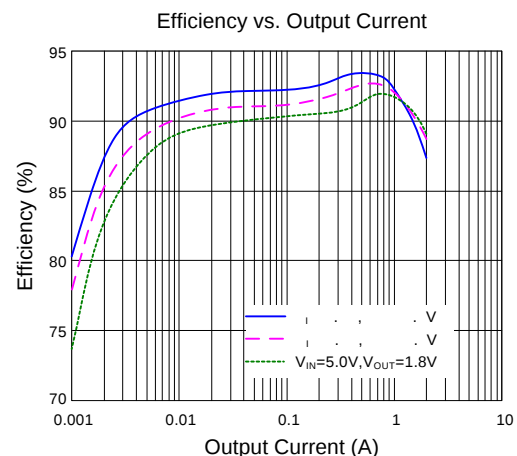


Figure2. Efficiency vs. Load Current

Pinout (Top View)

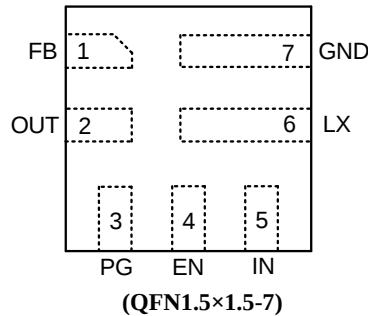

Top Mark: 9Gxyz for SYV843AQWC (device code: 9G, *x=year code, y=week code, z= lot number code*)

Pin Name	Pin Number	Pin Description
FB	1	Feedback pin. Connect this pin to the center point of the output resistor divider (as shown in Figure 1) to program the output voltage: $V_{OUT}=0.6V \times (1+R_H/R_L)$
OUT	2	Output feedback pin, connect to the output capacitor side.
PG	3	Power good indicator (open drain output). Low if the output < 90% or the output >120% of regulation voltage; High otherwise. Connect a pull-up resistor to the input.
EN	4	Enable control. Pull high to turn on. Do not leave it floating
IN	5	Input pin. Decouple this pin to GND pin with at least a 22μF ceramic cap.
LX	6	Inductor pin. Connect this pin to the switching node of inductor.
GND	7	Ground pin.

Block Diagram

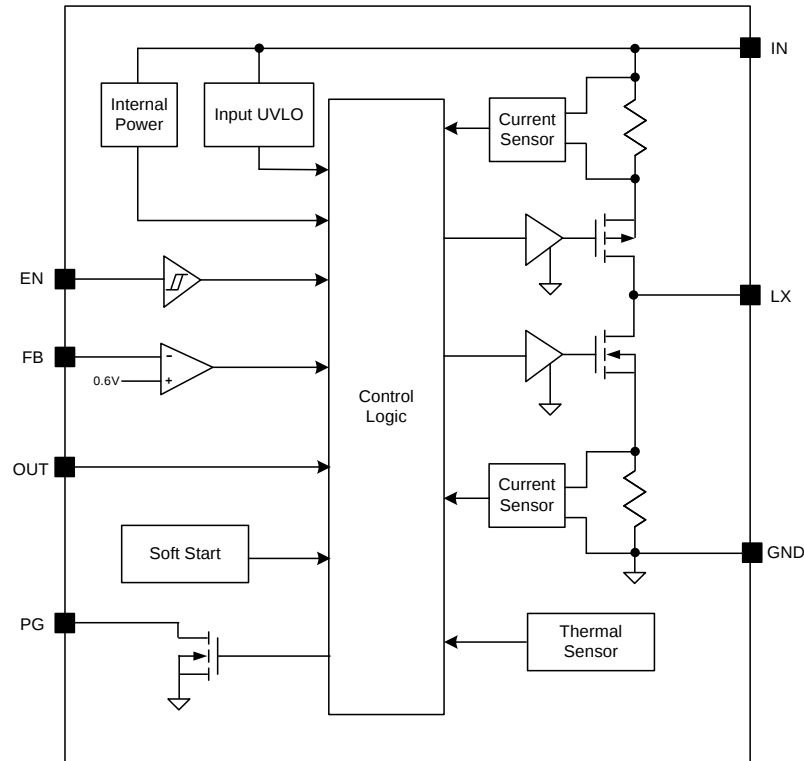


Figure3. SYV843A Block Diagram

Absolute Maximum Ratings (Note 1)

Supply Input Voltage	-0.3V to 6.0V
EN, FB, PG, OUT Voltage	-0.3V to VIN + 0.6V
LX Voltage	-0.3V ^{(*)1} to 6V ^{(*)2}
Power Dissipation, Pd @ TA = 25°C,	
QFN1.5×1.5-7	1.5W
Package Thermal Resistance (Note 2)	
θJA	66°C/W
θJC	5°C/W
Junction Temperature Range	-150°C
Lead Temperature (Soldering, 10 sec.)	260°C
Storage Temperature Range	-65°C to 150°C

(*)1 LX Voltage Tested Down to -3V <20ns

(*)2 LX Voltage Tested Up to +7V <20ns

Recommended Operating Conditions (Note 3)

Supply Input Voltage	2.7V to 5.5V
Junction Temperature Range	-40°C to 125°C
Ambient Temperature Range	-40°C to 85°C

Electrical Characteristics

($V_{IN} = 5.0V$, $V_{OUT} = 1.8V$, $L = 0.68\mu H$, $C_{OUT} = 22\mu F$, $T_A = 25^\circ C$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		2.7		5.5	V
Input UVLO Threshold	V_{UVLO}				2.7	V
Input UVLO Hysteresis	V_{HYS}			0.18		V
Quiescent Current	I_Q	$V_{FB} = V_{REF} \times 105\%$		65		μA
Shutdown Current	I_{SHDN}	$V_{EN} = 0V$		0.1	1	μA
Feedback Reference Voltage	V_{REF}	$I_{OUT} = 1.0A$	594	600	606	mV
Output Discharge Resistance	R_{DIS}			75		Ω
Top FET R_{ON}	$R_{DS(ON)1}$			85		m Ω
Bottom FET R_{ON}	$R_{DS(ON)2}$			50		m Ω
EN Input Voltage High	$V_{EN,H}$		1.1			V
EN Input Voltage Low	$V_{EN,L}$				0.4	V
PG Threshold for Under Voltage Detection	$V_{PG,UV}$	V_{FB} falling, PG from high to low		90		$\%V_{REF}$
PG Low Delay Time for Under Voltage Detection	$t_{PG,UV}$			15		μs
PG Threshold for Over Voltage Detection	$V_{PG,OV}$	V_{FB} rising, PG from high to low		120		$\%V_{REF}$
PG Low Delay Time for Over Voltage Detection	$t_{PG,OV}$			10		μs
Min ON Time	$t_{ON,MIN}$			100		ns
Maximum Duty Cycle	D_{MAX}		100			%
Turn On Delay	$t_{ON,DLY}$	from EN high to LX start switching		90		μs
Soft-start Time	t_{SS}			0.35		ms
Switching Frequency	F_{SW}	$I_{OUT} = 1.0A$		1.5		MHz
Top FET Current Limit	$I_{LMT, TOP}$		4			A
Bottom FET Current Limit	$I_{LMT, BOT}$		3			A
Output Under Voltage Protection Threshold	V_{UVP}			40		$\%V_{REF}$
Output UVP Delay	$t_{UVP,DLY}$			15		μs
Thermal Shutdown Temperature	T_{SD}			150		$^\circ C$
Thermal Shutdown Hysteresis	T_{HYS}			15		$^\circ C$



AN_SYV843A



Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note2: θ_{JA} of SYV843A is measured in the natural convection at $T_A = 25^\circ\text{C}$ on 2OZ two-layer Silergy evaluation board. Pin 6 is the case position for SYV843A θ_{JC} measurement.


Note 3: The device is not guaranteed to function outside its operating conditions.

Typical Performance Characteristics


Efficiency vs. Output Current

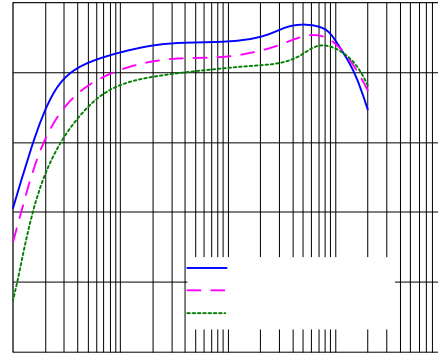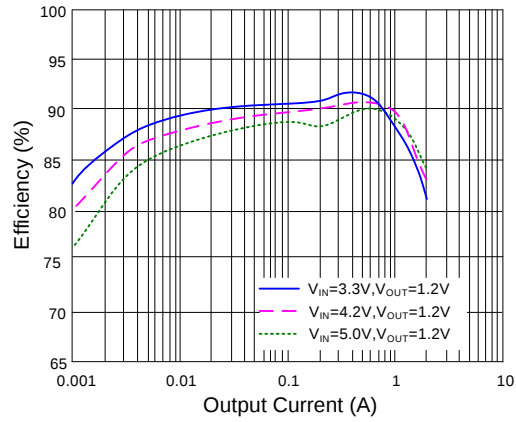

Efficiency vs. Output Current

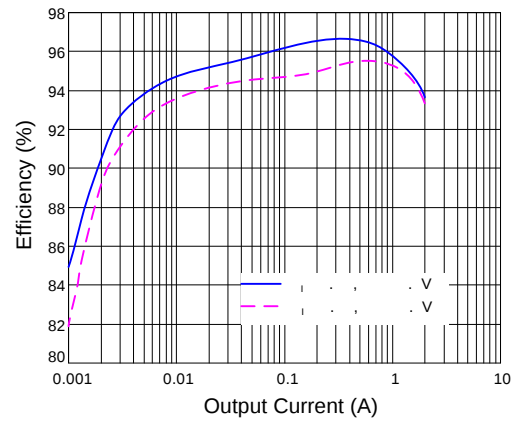


V_{OUT} vs. Temperature

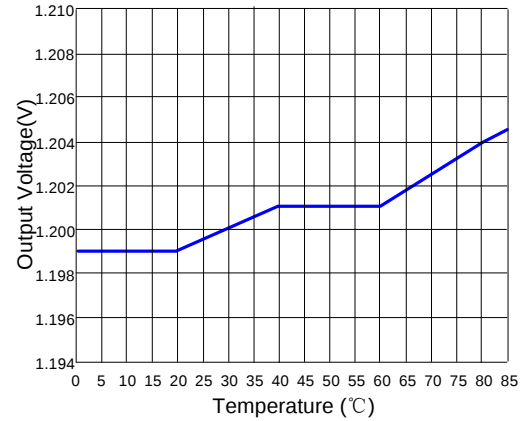

Output Ripple


($V_{IN}=5.0V, V_{OUT}=1.8V, I_O=2.0A$)

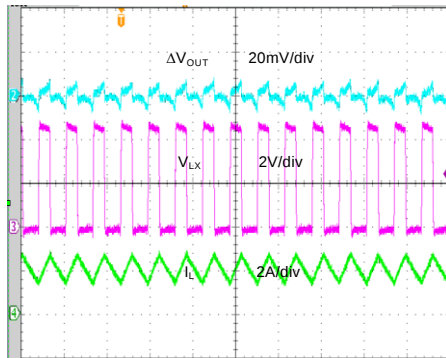

Time (1 μ s/div)


Output Ripple

($V_{IN}=5.0V, V_{OUT}=1.8V, I_O=50mA$)

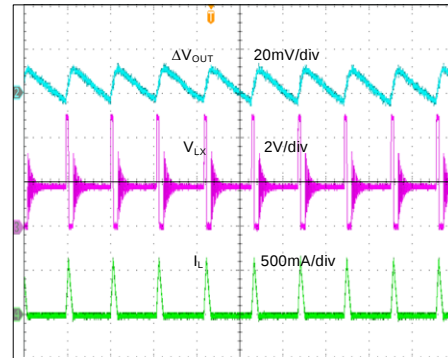


Time (4 μ s/div)

Load Transient
($V_{IN}=5.0V$, $V_{OUT}=1.2V$, $I_O=1mA \sim 2A$)

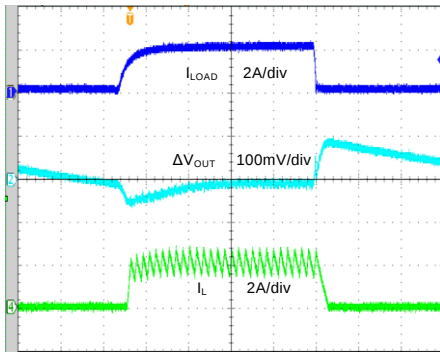


Time (4μs/div)

Load Transient
($V_{IN}=5.0V$, $V_{OUT}=1.2V$, $I_O=0.5A \sim 2A$)

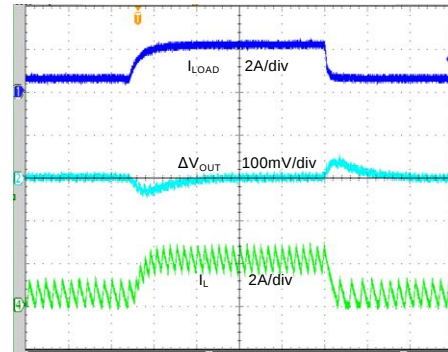


Time (4μs/div)

Startup from Enable
($V_{IN}=5.0V$, $V_{OUT}=1.8V$, $I_O=2.0A$)

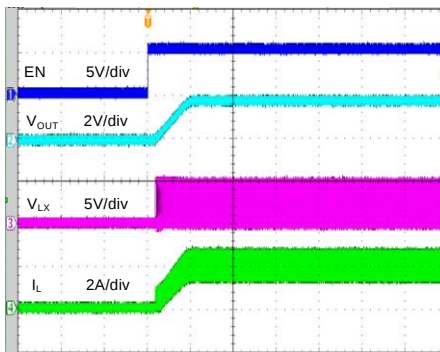


Time (400μs/div)

Shutdown from Enable
($V_{IN}=5.0V$, $V_{OUT}=1.8V$, $I_O=2.0A$)

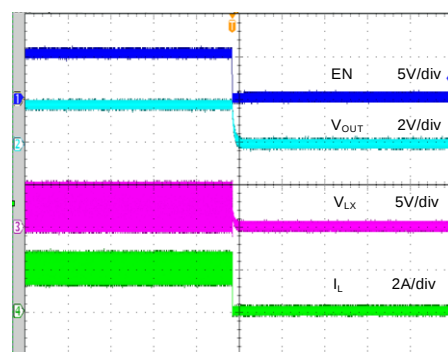


Time (400μs/div)

Short Circuit Protection
($V_{IN}=5.0V$, $V_{OUT}=1.8V$, $I_O=0A \sim \text{Short}$)

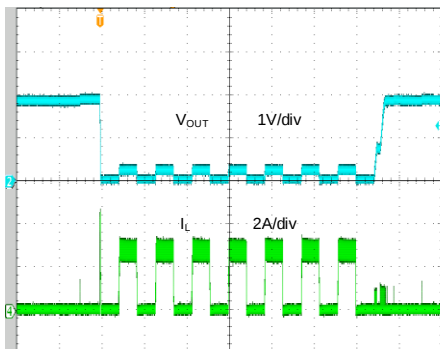

Time (2ms/div)

Short Circuit Protection
($V_{IN}=5.0V$, $V_{OUT}=1.8V$, $I_O=2.0A \sim \text{Short}$)

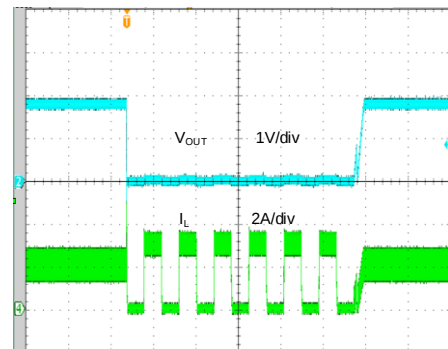

Time (2ms/div)

Operation

The SYV843A is a high efficiency 1.5MHz synchronous step down DC/DC regulator capable of delivering up to 3 A output current. The SYV843A can operate over a wide input voltage range from 2.7V to 5.5V and integrates main switch and synchronous switch with very low $R_{DS(ON)}$ to minimize the conduction loss.

Low output voltage ripple, small external inductor and capacitor sizes are achieved with 1.5MHz switching frequency.

Applications Information

Because of the high integration in the SYV843A, the application circuit based on these regulators is rather simple. Only input capacitor C_{IN} , output capacitor C_{OUT} , output inductor L and feedback resistors (R_H and R_L) need to be selected for the targeted application specifications.

Feedback Resistor Dividers R_H and R_L

Choose R_H and R_L to program the proper output voltage. To minimize the power consumption under light loads, it is desirable to choose large resistance values for both R_H and R_L . A value of between 100k Ω and 1M Ω is highly recommended for both resistors. If $R_L = 120k\Omega$ is chosen, then R_H can be calculated to be:

$$R_H = \frac{(V_{OUT} - 0.6V) \times R_L}{0.6V}$$

Input Capacitor C_{IN}

A typical X5R or better grade ceramic capacitor with 6.3V rating and greater than 22uF capacitance is recommended. To minimize the potential noise problem, we place this ceramic capacitor really close to the IN and GND pins. Care should be taken to minimize the loop area formed by C_{IN} , and IN/GND pins.

Output Inductor L

There are several considerations in choosing this inductor.

- 1) Choose the inductance to provide the desired ripple current. It is suggested to choose the ripple current to be about 40% of the maximum output current. The inductance is calculated as:

$$L = \frac{V_{OUT}(1 - V_{OUT}/V_{IN,MAX})}{F_{SW} \times I_{OUT,MAX} \times 40\%}$$

Where F_{SW} is the switching frequency and $I_{OUT, max}$ is the maximum load current.

- 2) The saturation current rating of the inductor must be selected to be greater than the peak inductor current under full load conditions.

$$I_{SAT, MIN} > I_{OUT, MAX} + \frac{V_{OUT}(1 - V_{OUT}/V_{IN,MAX})}{2 \times F_{SW} \times L}$$

- 3) The DCR of the inductor and the core loss at the switching frequency must be low enough to achieve the desired efficiency requirement. It is desirable to choose an inductor with $DCR < 25m\Omega$ to achieve a good overall efficiency.

Inductor vs. Output Capacitor

The ripple base control strategy need very little C_{OUT} to confirm stability. Too large inductor and C_{OUT} will lead to instability. The recommend inductance and output capacitor is shown as below.

Inductance vs. Output Capacitor Selection Table

L	C_{OUT}					
	22 μ F	44 μ F	88 μ F	120 μ F	180 μ F	220 μ F
0.47 μ H	Note4	√	√	√	√	√
0.68 μ H	Note4	√	√	√	√	×
1.0 μ H	√	√	√	√	×	×

Note 4: Only suitable for $V_{OUT} < 2.0V$ application.

Over Current Protection

With load current increasing, as soon as the high side power FET current gets higher than peak current limit threshold, the high side power FET will turn off and the low side power FET will keep turning on until low side power FET current decrease below the valley current limit threshold. If the load current continues to increase, the output voltage will drop.

Short Circuit Protection

When the output voltage falls below 40% of the regulation level for more than 15 μ s, the output UVP

is detected and the SYV843A will operate in hiccup mode. The hiccup frequency is 600Hz, the hiccup duty cycle is 50%. If the hard short is removed, the IC will auto retry to normal operation.

Over Voltage Protection

If the DC output voltage is about 3% over the regulation level, both high side power FET and low side power FET will turn off and enter into stand-by mode.

Thermal Shutdown Protection

If the junction temperature of SYV843A is higher than the thermal shutdown temperature (typical 150°C), the IC will turn off both high side power FET and low side power FET, and then enters thermal shutdown protection mode. It will remain in this state until the junction temperature decreases below 135°C. After exiting this state, the IC auto retries to normal operation.

Layout Design

The layout design of SYV843A regulator is relatively simple. For the best efficiency and to minimum noise

problems, we should place the following components close to the IC: C_{IN} , L , R_H and R_L .

- 1) It is desirable to maximize the PCB copper area connected to GND pin to achieve the best thermal and noise performance. If the board space allowed, a ground plane is highly desirable. Reasonable vias are suggested to be placed underneath the ground pad to enhance the soldering quality and thermal performance.
- 2) C_{IN} must be close to Pins IN and GND. The loop area formed by C_{IN} and GND must be minimized.
- 3) The PCB copper area associated with LX pin must be minimized to avoid the potential noise problem.
- 4) The components R_H and R_L , and the trace connected to the FB pin and OUT pin must NOT be adjacent to the LX net on the PCB layout to avoid the noise problem.



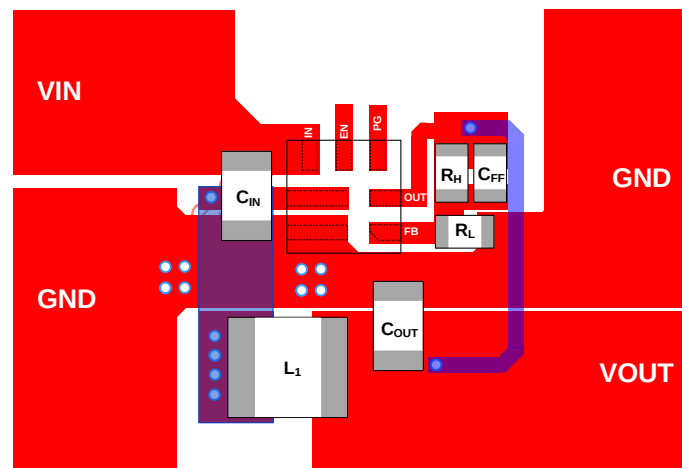


Figure4. PCB Layout Suggestion


QFN1.5×1.5-7 Package Outline Drawing

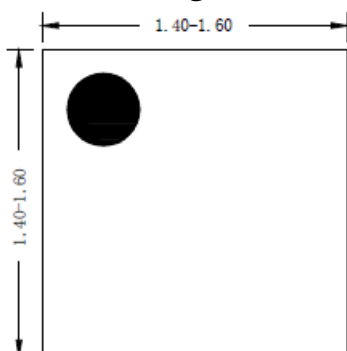


Top View

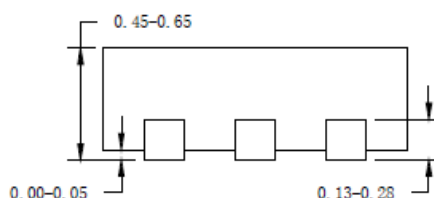

Side View

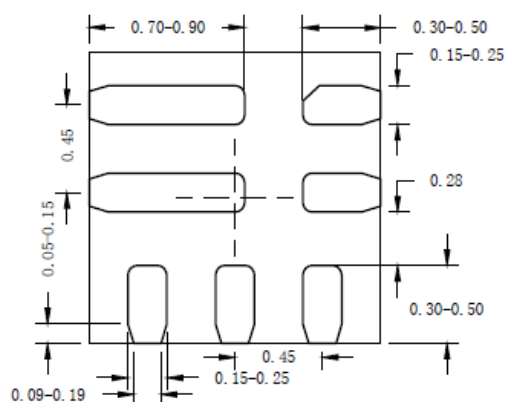

Bottom View

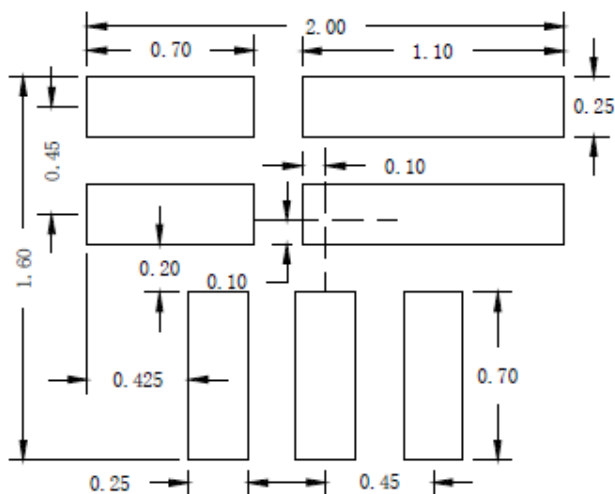


**Recommended PCB layout
(Reference only)**


Notes: All dimension in millimeter and exclude mold flash & metal burr

Taping & Reel Specification

1. QFN1.5×1.5 taping orientation

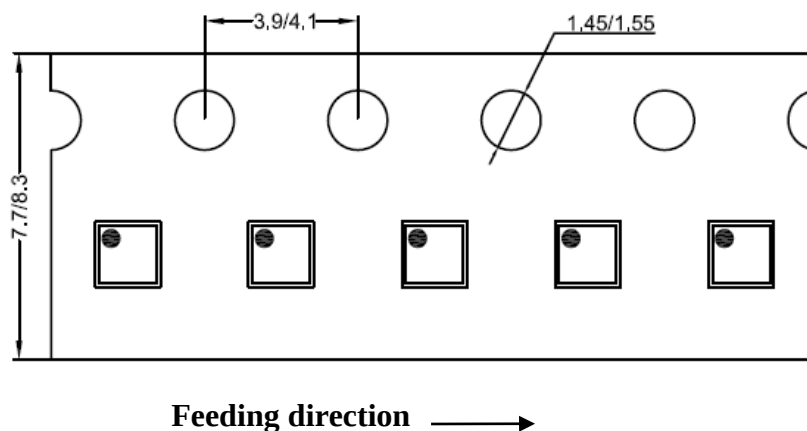

2. Carrier Tape & Reel specification for packages

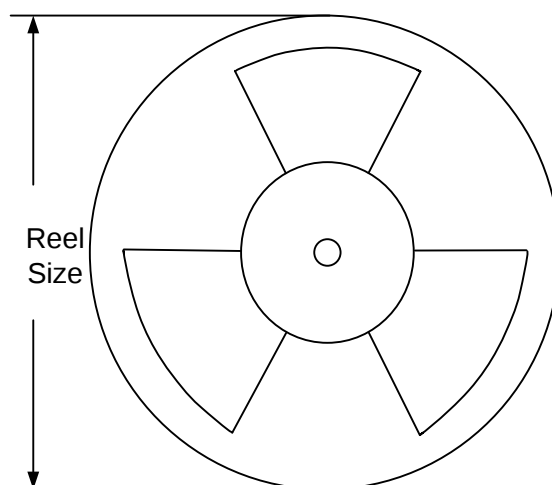

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer length(mm)	Leader length (mm)	Qty per reel
QFN1.5×1.5	8	4	7"	400	160	3000

3. Others: NA



IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2020 Silergy Corp.

All Rights Reserved.