
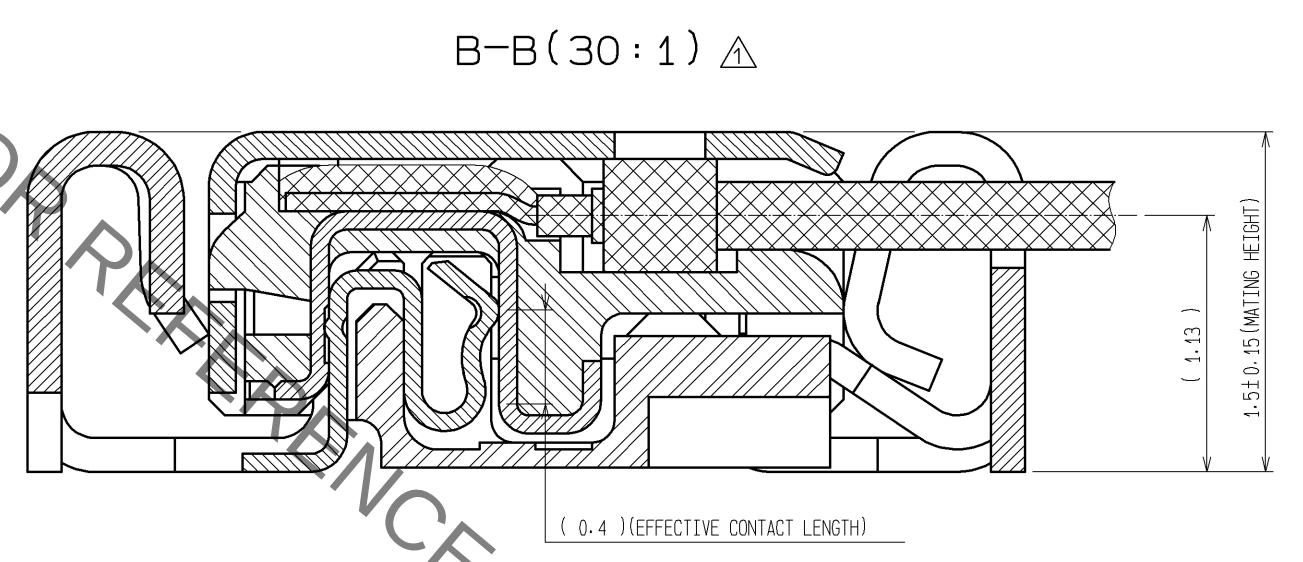
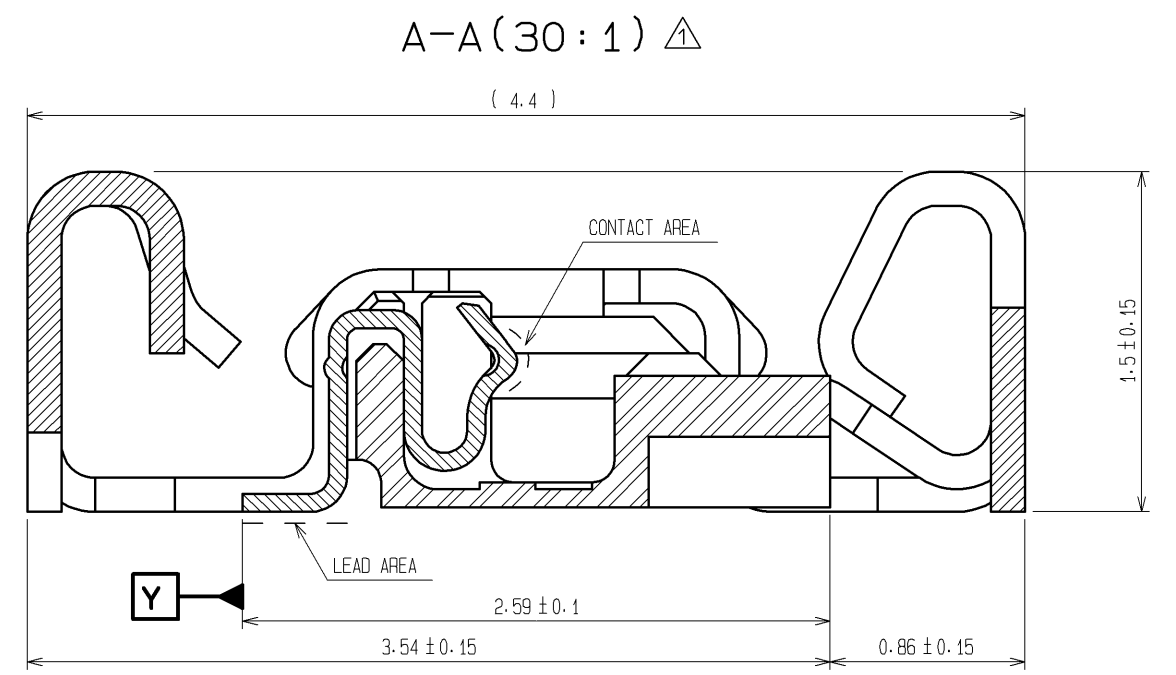
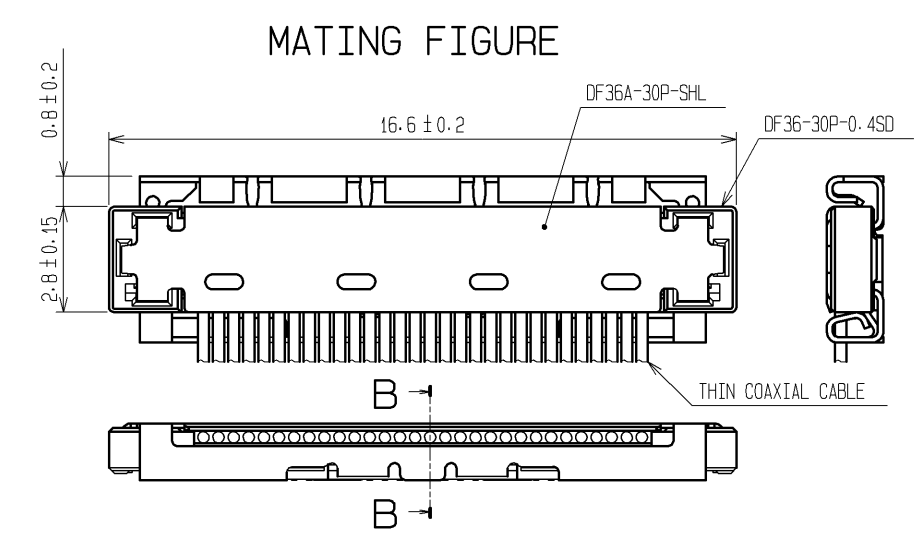
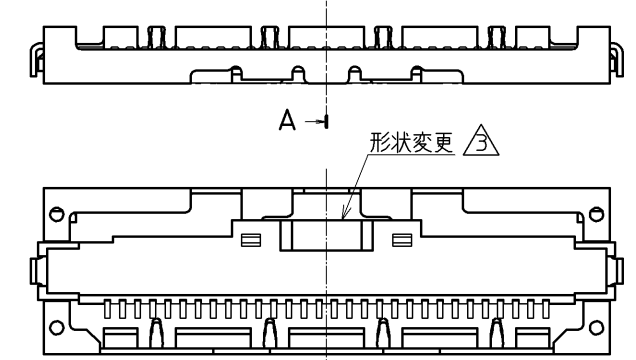


Jan.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

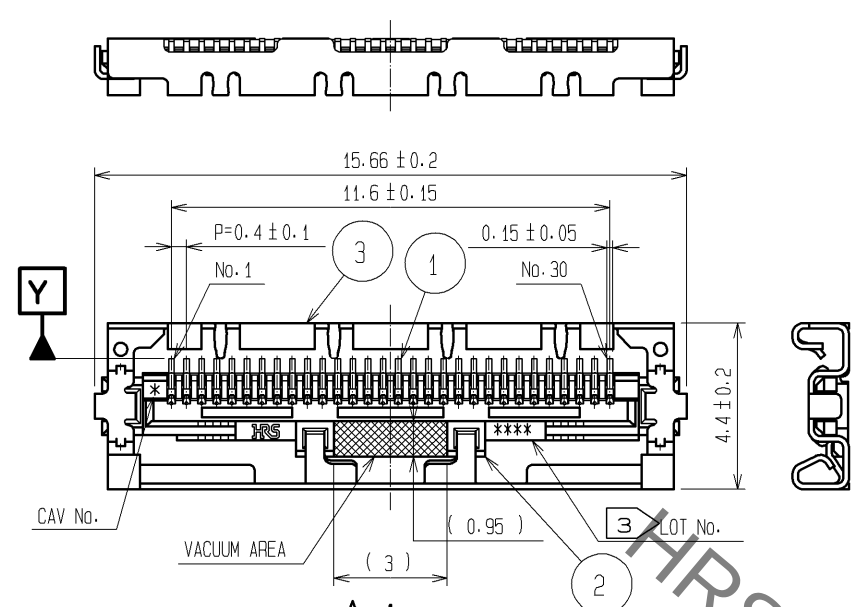

- NOTES
1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
 3. LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE: 8GFD
→YEAR:2008 MONTH:July DAY:15 LINE No.:4
 4. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
 5. SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS ARE COVERED BY METAL SHIELDING.

YEAR		MONTH		DAY				LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE
10	0	Jan	A	1	1	11	B	21	M
11	1	Feb	B	2	2	12	C	22	N
12	2	Mar	C	3	3	13	D	23	P
13	3	Apr	D	4	4	14	E	24	Q
14	4	May	E	5	5	15	F	25	R
15	5	Jun	F	6	6	16	G	26	S
16	6	Jul	G	7	7	17	H	27	T
17	7	Aug	H	8	8	18	J	28	U
08	8	Sep	I	9	9	19	K	29	V
09	9	Oct	J	10	A	20	L	30	W
		Nov	K			31	X		
		Dec	L						

2	LCP	UL94V-0	6	PS	BLACK
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.3µm min LEAD AREA : Au PLATING 0.1µm min UNDER PLATING : Ni PLATING 2µm min	5	POLYESTER	CLEAR
			4	PS	CLEAR
			3	PHOSPHOR BRONZE	WHOLE AREA : Sn PLATING 1µm min UNDER PLATING : Cu PLATING 0.2µm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-003181	DESIGNED SI. ISHII
		APPROVED : TY. OMA	07. 04. 06	DRAWING NO. EDC3-315346-01	CHECKED HK. UMEHARA
HIROSE ELECTRIC CO., LTD.		CHECED : TS. SAKATA	07. 04. 06	PART NO. DF36A-30S-0.4V(51)	DATE 08. 07. 29
		DESIGNED : MN. KENJO	07. 04. 05	CODE NO. CL662-4017-0-51	
		DRAWN : MN. KENJO	07. 04. 05		

Jan.1.2020 Copyright 2020 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

