

APPROVAL SHEET

Customer:

Customer Part NO.

Part NO.

HZ450M561P350C97PCYL

Item:

560uF/450V

Catalog Series:

HZ Series

Date of Issue:

APR.30.2026

Approved NO. :

SD20260400838

BUYER'S STAMP	Approved by			

Su' scon	Submitted by			
	Approval	Check	Affirm	Design
				

Su' scon



DONG GUAN HEYUE ELECTRONIC CO., LTD

TEL:0769-8308 6886

FAX:0769-8308 6886

Mail : sales016@heyuecap.com

Halogen Free
RoHS COMPLIANT Environmental-Benefit Products

RECORD OF REVISION					
NO.	VERSION	REASON	DATE	CHECKED	REMARKS
1	A00	First Release	2026.04.30	劉冬冬	
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					
26					
27					
28					
29					
30					

HZ Series For Approval

NO.	Customer Part No.	Specification	<i>Su'scon</i> Part No.
1		EC,560uF/450V	HZ450M561P350C97PCYL
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			
14			
15			
16			
17			
18			
19			
20			
21			
22			
23			
24			
25			
26			

Explanation of Parts Numbers

1	2
H	Z



[Series]

3	4	5
4	5	0



[Voltage]

6
M



[Capacitance Tolerance]

7	8	9
5	6	1



[Capacitance Code]

10
P



[Diameter]

11	12
3	5



[Length]

13
0



[Special Remark]

14	15	16
C	9	7



[Customer Code]

17	18	19	20
P	C	Y	L



[Type Code description]



L=Laser printing/
RoHS/Free Halogen

004=4V
006=6.3V
010=10V
016=16V
025=25V
035=35V
050=50V
063=63V
080=80V
100=100V
160=160V
350=350V
400=400V
420=420V
450=450V
500=500V
180=180V
200=200V
250=250V
315=315V
330=330V

J= ±5 %
K= ±10%
M= ±20 %
A= 0 %~+20 %
S= 0 %~+40 %
R= 0 %~+50 %
D= -5 %~+20 %
V= -10 %~+20 %
Q= -10 %~+30 %
T= -10 %~+50 %
E= -15 %~+20 %
I= -30 %~+20 %
B= +10 %~+30 %
N= +10 %~+25 %
C= -5 %~+15 %
Z= -0 %~+30 %

0R1=0.1uF
1R0=1uF
100=10 uF
101=100 uF
102=1000 uF
103=10000 uF
223=22000 uF
G52=1650 uF

L=20Φ
M=22Φ
N=25Φ
Z=25.4Φ
O=30Φ
P=35Φ
Q=40Φ
W=42Φ
8=45Φ
R=51Φ
S=64Φ
T=76Φ
U=90Φ

20	20
25	25
50	50
100	A0

Length ≥100mm Code11 Ex:100,Input A0.

Code 11	Meaning
A	10
B	11
C	12
D	13
E	14
F	15
G	16
H	17
I	18
J	19
K	20
Q	21
M	22
N	31
L	35


0	Snap-in
	Screw Terminal

C97	Customer No.
KKK	Standard

YS0	Snap-in Short Terminal(4.0mm)
YL0	Snap-in Long Terminal(5.8mm)
YSC	Snap-in Short Terminal(4.0mm) Cu Material
YLC	Snap-in Long Terminal(5.8mm) Cu Material
PCS	PC board pin-out Straight Terminal
PCY	PC board pin-out terminal(5.8mm)
PSY	PC board pin-out terminal(4.0mm)
PCU	PC board pin-out U-insert terminal
PCB	PC board pin-out bend terminal
T00	Snap-in 3 pins Long Terminal(5.8mm)
TS0	Snap-in 3 pins Long Terminal(4.0mm)
U00	Snap-in 5 pins Long Terminal
W00	Screw Terminal
W01	Screw Terminal (with Thread stud mounting)

FOR APPROVAL

DIMENSIONS(mm)

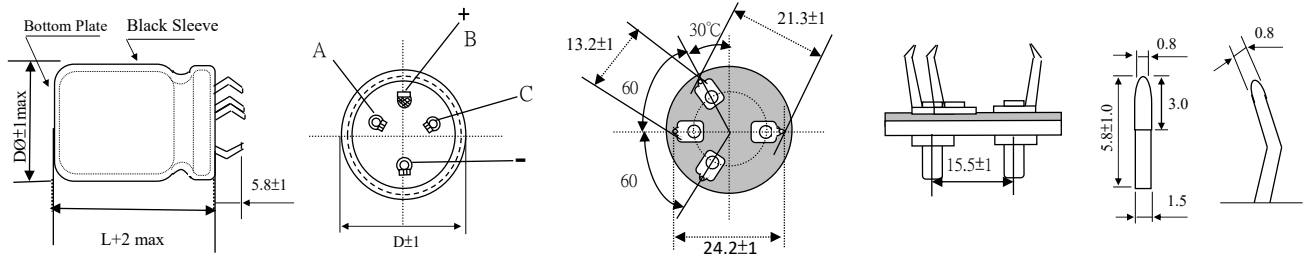

Customer :		Aluminum Electrolytic Capacitors									
東莞市合粵電子有限公司		HZ Series									
Electric Characteristics:											
東莞市合粵電子有限公司	Su'scon	Cap.	Cap.	Rate	Surge	Oper.	Nominal	Leakage	D.F.	Max.Ripple	Load
P/N	P/N	(uF)	Tol.	Volt.	Volt.	Temp.	Case Size	Current	Max	Current	Life
			(%)	(V-DC)	(V-DC)	($^\circ\text{C}$)	D*L(mm)	Max(uA)	(%)	(A)	(Hours)
	HZ450M561P350C97PCYL	560	± 20	450	500	105	35*35	1505	20	1.25	3000

REMARKS:	
1. Leakage Current Test:	at 20°C for 5 minutes .
2. Operating temperature:	16V~ 250V -40 $^\circ\text{C}$ ~ +105 $^\circ\text{C}$; 350V~ 550V -25 $^\circ\text{C}$ ~ + 105 $^\circ\text{C}$.
3. Dissipation Factor Test:	at 20°C , 120Hz.
4. Capacitance Test:	at 20°C , 120Hz.
5. Ripple Current Test:	at 105 $^\circ\text{C}$, 120Hz .
6. Load Life:	3000 hours,subjected to DC voltage with the rated ripple current is applied at 105 $^\circ\text{C}$.
Capacitance Change:	Within $\pm 20\%$ of initial value;
tan δ :	200% or less of initial specified value;
Leakage Current:	Initial specified value or less;
7. Shelf Life:	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours 105 $^\circ\text{C}$ without voltage applide. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.
Capacitance Change :	Within $\pm 15\%$ of initial value;
tan δ :	200% or less of initial specified value;
Leakage Current:	Initial specified value or less.
8. when have characteristic requested :	Load life & shelf life test and etc. , judgment standard reference to our catalogue.

●SPECIFICATION											
Leakage Current 洩漏電流	$I \leq 3\sqrt{CV}(\text{uA})$, which is greater. (After 5 minutes application of working voltage)										
Dissipation Factor 散逸因素 (損失角)	Measurement Frequency:120Hz. Temperature: 20°C										
(tan δ)	Rate Voltage(V)	16	25	35	50	63	80	100	160	200~250	350~550
	tan δ (MAX)	0.50	0.45	0.40	0.35	0.30	0.25	0.20	0.15	0.15	0.20
	When nominal capacitance exceeds 1000uF, 0.01 shall be added every 1,000uF increase.										
Standards 參照標準	IEC 60384-4(JIS C5101-4)										



●RIPPLE CURRENT COEFFICIENTS					
Frequency coefficient of allowable ripple current					
Rated Voltage (V)	Frequency(Hz)				
	50	120	1k	10k	100k
16~100	0.88	1.00	1.05	1.10	1.15
160~250	0.85	1.00	1.20	1.30	1.50
350~550	0.88	1.00	1.20	1.25	1.40

1. Scope 適用範圍：

This specification applies to aluminium electrolytic capacitor, used in electronic equipment.

本說明對於用電子儀器設備進行檢測之鋁電解電容器適用。

2. Electrical characteristics 電氣特性：

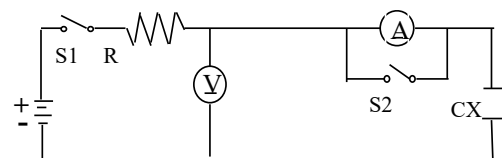NO.	ITEM 項目	TEST METHOD 測試方法			SPECIFICATION 規格	
2.1	Rated voltage 額定電壓				Voltage range、capacitance range Dissipation factor, see specification of this series. 電壓、容量範圍、損失角請看該系列之規格說明。	
2.2	Capacitance 靜電容量	1. Measuring frequency : 120 ± 12Hz 測 定 頻 率				
2.3	Dissipation factor 散逸因素 (損失角)	2. Measuring voltage : ≤0.5Vrms + 0.5 ~ 2.0VDC 測 定 電 壓 3. Measurement circuit : 測 定 電 路 				
2.4	Leakage current 泄 漏 電 流	DC leakage current shall be measured after 5 minutes application of the DC rated working voltage through the 1000 Ω resistor at 20℃. 在20 ℃ 通過1000Ω的電阻施加直流工作電壓 5 分鐘後測定直流泄漏電流。  R : 1000 ± 100Ω A : DC current meter V : DC voltage meter S1 : Switch 開關 S2 : Switch for protect of current meter CX : Testing capacitor 測試電容			leakage current, see specification of this series. 泄漏電流請看該系列之規格說明。	
2.5	Temperature characteristics 溫度特性	STEP 步驟	TEMPERATURE 溫 度	STORAGE TIME 放置時間	Step 2. Impedance ratio (Zr / Z r0) less than specified value.	
		1	20 ± 2 ℃	30 minutes	阻抗比：低于規定值 . Step 4 1.Capacitance change : within ± 20% of the initial measured value. 靜電容量變化：最初測定值的 ± 20%以內.	
		2	Minimum specification temperature最低規格溫度 -55 ℃ or -40℃ or -25 ℃ ± 3 ℃	2 hours		
		3	20 ± 2 ℃	30minutes	2.Leakage current : Under 125 ℃ for 10 times specification values, 105 ℃ for 8 times the specification values, 85 ℃ for 5 times the specification values 125℃為規格值10倍以下，105℃為為規格值8倍以下，85℃為規格值5倍以下 Tan δ : less than specified value . 損失角：低于規定值 .	
		4	Maximum specification temperature 最高規格溫度 85 ℃ or 105 ℃ or 125℃ or 130 ℃ ± 2 ℃	2 hours		
		5	20 ± 2 ℃	30 minutes		
		Step 1. Measure the capacitance and impedance. 測定靜電容量及阻抗 (Z r0) . (Z , 20℃ , 120Hz ± 10%) Step 2. Measure the impedance at thermal balance after 2 hours. 達到熱平衡2小時後測定阻抗 (Zr) . (Z , Minimum specification temperature最低規格溫度, 120Hz ± 10%) Step 4. After the highest specification temperature reaches thermal equilibrium for 2 hours, the electrostatic capacity and leakage current loss are measured. 最高規格溫度達到熱平衡2小時後測定靜電容量及漏電流損失角 . 備註： 以具體規格工作範圍為準。 Remarks: Subject to the working range of specific specifications.				No damage or leakage of electrolyte . 無損傷或電解液漏出 .

NO.	ITEM 項目	TEST METHOD 測試方法	SPECIFICATION 規格
2.6	Surge test 突波試驗	Rated surge voltage shall be applied (switch on) for 30 ± 5 seconds and then shall be applied (switch off) with discharge for 330 ± 5 seconds at room temperature . This cycle shall be repeated for 1000 cycles . Duration of one cycle is 6 ± 0.5 minutes . 在常溫下施加 (合上開關) 額定涌浪電壓 30 ± 5 秒, 然後停止施加 (斷開開關) 涌浪電壓並且放電 330 ± 5 秒. 這個循環要重複 1000 次 . 以 6 ± 0.5 分鐘為一個循環周期 .	Capacitance change : within $\pm 15\%$ of the initial specified value. 靜電容量變化 : 最初規定值的 $\pm 15\%$ 以內. Tan δ : less than specified value . 損失角 : 低於規定值 . Leakage current : less than specified value . 泄漏電流 : 低於規定值 .

3. Mechanical characteristics 機械特性 :


NO.	ITEM 項目	TEST METHOD 測試方法	SPECIFICATION 規格																				
3.1	Lead strength 端子強度	(A) Tensile strength 拉伸強度： wire lead terminal 導針型： <table><tr><td>d (mm)</td><td>0.35 < d ≤ 0.5</td><td>0.5 < d ≤ 0.8</td><td>0.8 < d ≤ 1.25</td></tr><tr><td>load (Kg)</td><td>0.51</td><td>1.0</td><td>2.0</td></tr></table> snap-in terminal 尖腳型： <table><tr><td>d (mm)</td><td>snap-in terminal 尖腳端子</td></tr><tr><td>load (Kg)</td><td>2.0</td></tr></table> The capacitor shall withstand the constant tensile force specified between the body and each lead for 10 seconds without damage either mechanical or electrical. 電容器各端子要承受規定的荷重 10 秒, 不能有電氣或機械特性上的損傷. (B) Bending strength 彎曲強度： wire lead terminal 導針型： <table><tr><td>d (mm)</td><td>0.35 < d ≤ 0.5</td><td>0.5 < d ≤ 0.8</td><td>0.8 < d ≤ 1.25</td></tr><tr><td>load (Kg)</td><td>0.25</td><td>0.51</td><td>1.0</td></tr></table> With the capacitor in a vertical position apply the load specified axially to each lead . The capacitor shall be rotated slowly from the vertical to the horizontal position , back to the vertical position . The 180° in the opposite direction and back the original position .About five seconds off Performance of capacitor shall not have changed and leads shall be undamaged . 給在豎直位置的電容器的每一端子以軸方向施加規定荷重, 慢慢將電容器由豎直位置轉至水平位置. 然後向相反方向彎曲 180° , 再回到原來位置(約5秒)取下. 電容器性能不能有變化及端子不能有損傷.	d (mm)	0.35 < d ≤ 0.5	0.5 < d ≤ 0.8	0.8 < d ≤ 1.25	load (Kg)	0.51	1.0	2.0	d (mm)	snap-in terminal 尖腳端子	load (Kg)	2.0	d (mm)	0.35 < d ≤ 0.5	0.5 < d ≤ 0.8	0.8 < d ≤ 1.25	load (Kg)	0.25	0.51	1.0	When the capacitance is measured, there shall be no intermittent contacts, or open- or short- circuiting. 測定靜電容量時, 不能有接觸不良, 開路或短路. Capacitance change： within ± 5% of the initial specified value. 靜電容量變化： 最初規定值的 ± 5%以內. Tan δ： less than specified value . 損失角：低于規定值 . Leakage current： less than specified value . 泄漏電流：低于規定值 . There shall be no such mechanical damage as terminal damage etc. 不能有如端子受損之類的機械特性上的損傷.
d (mm)	0.35 < d ≤ 0.5	0.5 < d ≤ 0.8	0.8 < d ≤ 1.25																				
load (Kg)	0.51	1.0	2.0																				
d (mm)	snap-in terminal 尖腳端子																						
load (Kg)	2.0																						
d (mm)	0.35 < d ≤ 0.5	0.5 < d ≤ 0.8	0.8 < d ≤ 1.25																				
load (Kg)	0.25	0.51	1.0																				

NO.	ITEM 項目	TEST METHOD 測試方法	SPECIFICATION 規格
3.2	Vibration resistance 耐振性	The frequency of the vibration shall vary uniformly within the range 10 to 55 Hz with the amplitude of 1.5 mm . The capacitor shall be securely mounted by its leads with hold the body of capacitor . The capacitor shall be vibrated in three mutually X.Y.Z perpendicular directions for a period of 2 hours in each direction . 振動頻率要均勻，範圍為 10 Hz, 到 55 Hz , 振幅為 1.5 mm . 電容器將由端子牢固地固定 . 電容器會被向三個互相垂直的方向X.Y.Z每個方向振動 2 小時 .	No damage or leakage of electrolyte . 無損傷或電解液漏出 . Capacitance change : within $\pm 5\%$ of the initial measured value . 容量變化：最初測定值的 $\pm 5\%$ 以內 . Tan δ : less than specified value . 損失角：低于規定值 . Leakage current : less than specified value . 泄漏電流：低于規定值 .
3.3	Solderability 焊錫性	Solder:Sn96.5Ag3Cu0.5 1.Capacitor needle part into the flux concentration 25% 5 ~ 10 seconds. 2.The leads are dipped in the solder bath of Sn at $245 \pm 5^{\circ}\text{C}$ for 3 ± 0.5 seconds . The dipping depth should be set at 1.5 ~ 2.0 mm . 焊錫種類：Sn96.5Ag3Cu0.5 1.將電容器導針部分浸入濃度為25%的助焊劑中5~10秒 2. 端子浸沒在 $245 \pm 5^{\circ}\text{C}$ 的錫焊液中 3 ± 0.5 秒 . 浸沒深度設定為 1.5 ~ 2.0 mm .	The solder alloy shall cover the 95% or more of the dipped lead's area . 錫液要覆蓋導針浸入表面積的 95% 以上 .

4. Reliability 信賴度 .

NO.	ITEM 項目	TEST METHOD 測試方法	SPECIFICATION 規格
4.1	Soldering heat resistance 焊錫耐熱性	1.Solder:Sn96.5Ag3Cu0.5 2.The leads immerse in the solder bath of Sn at $260 \pm 5^{\circ}\text{C}$ for 10 ± 1 seconds until a distance of 1.5 ~ 2mm from the case . 3.Keep the take out the samples at room temperature is s often wet in the more than 2 HRS. temperature is often wet in the more than 2 HRS. 1.焊錫種類：Sn96.5Ag3Cu0.5 2. 導針引線在 $260 \pm 5^{\circ}\text{C}$ 的錫焊液中浸沒至離本體 1.5 ~ 2 mm 的地方 10 ± 1 秒鐘 . 3.將取出的樣品在常溫常濕中保留2Hrs以上.	No damage or leakage of electrolyte . 無損傷或電解液漏出 . Capacitance change : within $\pm 5\%$ of the initial measured value . 容量變化：最初測定值的 $\pm 5\%$ 以內 . Tan δ : less than specified value . 損失角：低于規定值 . Leakage current : less than specified value . 泄漏電流：低于規定值 .

NO.	ITEM 項目	TEST METHOD 測試方法	SPECIFICATION 規格
4.2	Damp heat (steady state) 耐 濕 性 (穩定狀態)	1. The experiment of measuring early characteristics will have samples in the wet thermal control box. 2. Subject the capacitors to $40 \pm 2^{\circ}\text{C}$ and 95% In corresponding to the temperature and humidity conditions placed 500 $\pm$ 8 hours. 3. Keep the take out the samples at room temperature is often wet in the more than 2 HRS. 1. 將已測初期特性的實驗樣品放入調溫調濕箱中 2. 電容器在 $40 \pm 2^{\circ}\text{C}$ 及相對濕度 95% . 在相對應溫濕度條件下放置 500 $\pm$ 8 小時 . 3. 將取出的樣品在常溫常濕中保留 2Hrs 以上.	Capacitance change : within $\pm 10\%$ of the initial measured value . 容量變化 : 最初測定值的 $\pm 10\%$ 以內 . Tan δ : less than 120% of the initial specified value. 損失角 : 低於規定值的 120% . Leakage current : less than specified value . 泄漏電流 : 低於規定值 .
4.3	Load life 高溫負荷	3000 hours, subjected to DC voltage with the rated ripple current is applied at 105°C . the measurements shall meet the following limits . Measurements shall be performed after 6 hours exposed at room temperature . 在 105°C 環境下 , 連續加載額定直流電壓并疊加紋波電流 3000 小時后 . 按以下條件測試 : 測試在室溫露置 6 小時後進行 .	Capacitance change : within $\pm 20\%$ of the initial measured value . 容量變化 : 最初測定值的 $\pm 20\%$ 以內 . Tan δ : less than 200% of the initial specified value. 損失角 : 低於規定值的 200% . Leakage current : less than specified value . 泄漏電流 : 低於規定值 . Appearance : no abnormal . 外觀 : 無異常 .
4.4	Shelf life 高溫無負荷	After storage for 1000 hours at 85°C or 105°C or 125°C or $130^{\circ}\text{C} \pm 2^{\circ}\text{C}$ without voltage application , the measurements shall meet the following limits . Measurements shall be performed after exposed for 6 hrs at room temperature after application of DC rated voltage to the capacitor for Z minutes . 在 85°C or 105°C or 125°C or $130^{\circ}\text{C} \pm 2^{\circ}\text{C}$ 環境當中不施加直流定格電壓放置 Z 小時後 , 按以下條件測試 . 測試在室溫露置 6 小時 , 施加直流定格電壓 進行 (Z : see shelf life of this series. 見該系列放置壽命說明 .)	Capacitance change Tan δ . Rate of change: please have a look at this series of shelf life standard. 容量.損失角.的變化標準 : 請見該系列的放置壽命說明標準 less than specified value . 泄漏電流 : 低於初期規定值 . Appearance : no abnormal . 外觀 : 無異常 .
4.5	Storage at low temperature 低溫貯存	1. The capacitor shall be stored at temperature of $-40 \pm 3^{\circ}\text{C}$ for 16(-0/+2) hours , during which time no voltage shall be applied . And then the capacitor shall be subjected to standard atmospheric conditions for 16 hours or more , after which measurements shall be made . 電容器在 $-40 \pm 3^{\circ}\text{C}$ 環境當中貯存 16(-0/+2) 小時 , 其間不施加電壓, 之後 , 在標準大氣壓中露置 16 小時以上 , 然後進行測試 .	Capacitance change : within $\pm 10\%$ of the initial value . 容量變化 : 最初值的 $\pm 10\%$ 以內 . Tan δ : less than specified value . 損失角 : 低於規定值 . Leakage current : less than specified value . 泄漏電流 : 低於規定值 . Appearance : no abnormal . 外觀 : 無異常 .

NO.	ITEM 項目	TEST METHOD 測試方法	SPECIFICATION 規格
4.6	Pressure relief 防 爆 試 驗	DC test 直流測試： Send the following electricities while applying the inverse voltage . 施加反向電壓時通入下記電流 . where case size 外殼尺寸 (D 直徑)： $D \leq 22.4 \text{ mm} : 1 \text{ A d.c. max}$ $D > 22.4 \text{ mm} : 10 \text{ A d.c. max}$ Note : 1. This requirement applies to capacitors with a diameter of 8 mm or more . 2. When the pressure relief device does not open even 30 minutes after commencement of test , the test may be ended . 注 : 1. 此要求對於直徑 8 mm 或以上之電容器適用 . 2. 試驗開始, 經 30 分鍾後防爆裝置仍不動作, 試驗終止 .	DC test circuit 直流試驗回路  S : Switch 開關 A : DC current meter 直流電流計 Cx : testing capacitor 供試電容器 The pressure relief device shall open in such a way as to avoid any danger of fire or explosion of capacitor elements (terminal and metal foil etc) or cover . 防爆裝置必須動作打開為合格 . 以防止發生火災、爆炸或金屬片飛濺 .

5. Snap-In Type marking 牛腳型標識：

Marking on capacitors include：

電容器上的標識包括

① Su'scon trade-mark
Su'scon 商 標

② Norminal capacitance
標準靜電容量

③ Working voltage
工 作 電 壓

④ Series ,Maximum operating temperature ,Tolerance
系列, 最 高 使 用 溫 度,靜電容量許容差

⑤ Polarity
極 性

⑥ Y/Month/Day
年月日(6位碼)

⑦ Snap-In ,Production Lot
S+生產批號 (5位碼)

⑧ polarity is marked with white ink, other is marked by laser printing
⑧極性為白色油墨,其它均為鐳射刻印

⑤ —————→
⑥ —→ 260424
⑦ —→ S02114



Su 'scon ← ①
560 μ F ← ②
450V ← ③
HZ 105°C(M) ← ④

鋁電解電容器存放環境與控制

Storage Conditions and Control for Aluminum Electrolytic Capacitor

1. 環境溫度：5℃ ~ 35℃, 環境相對濕度：75%以下。

Store the capacitor at a temperature of 5℃ to 35℃ and at a relative humidity of less than 75% .

2. 存放環境不應有陽光直射, 不宜高溫。

Store the capacitor in low temperature places free from direct sun shine .

3. 存放環境不能有鹽分、油含量高的霧氣。

Store the capacitor in places free from oil vapor、salt water vapor.

4. 存放在遠離氯氣、氨氣、硫化氫、亞硫酸、硝酸等有害氣體含量高的地方。

Store the capacitor in places far from toxic gases (chlorine、ammonium、hydrogen sulfide、sulphurous acid、nitric acid , etc) .

5. 儲存環境不能有臭氧、紫外線或輻射。

Store the capacitor in place free from Ozone、ultraviolet ray or radiation .

Detergent needing attention:

使用清潔劑之注意事項:

Hydrogen carbide liquid and halogen liquid can cause Aluminium Electrolytic Capacitor to corrode. Some of Safe and Unsafe detergent are as follows;

鋁質電解電容器會受含有碳化氫鹵素溶劑之侵蝕,下列為各種安全與不安全之清潔劑,為避免不必要的損失,您所使用有關印刷基板之清潔劑名請事先告知本公司.

Safe 安全	Unsafe 不安全
Methanol 甲醇	1.1.2- trichloroethane 1.1.2- 三氯乙烷
Ethanol 乙醇	Tetrachloroethylene 四氯化碳
Propanol 丙醇	Chloroform(colorless volatilizable liquid) 哥羅仿(無色揮發性液體)
Butanol 丁醇	Dichloromethane 二氯甲烷
Detergent 去垢劑	Trichlorethylene 三氯甲烯 Dimethybenzene 二甲苯

Caution for Proper use of PET Sleeve in Electrolytic Capacitors

Caution: Avoid PET sleeve to contact water , Because the PET material will be dissolved by water at high temperature

1. PET sleeve water dissolved conditions

(1) When PET sleeve contact water it will not action.

During production process, The PET sleeve have water or water in case of Capacitor and capacitor in high temperature, The PET sleeve will dissolved.

(2) Avoid use list solvents to clean the PET sleeve capacitors.

1、Aromatic Hydrocarbon(s)

Example: Solvent	Status
Benzene	To dissolved
Toluene	To dissolved
Xylene	To dissolved

2、Low molecular Ketones & Esters

Example:

Methyl Ethyl Ketone(MEK)
Dimethyl Ketone(Acetone)
Methyl Isobutyl Ketone(MIBK)
Cyclohexanone
Ethyl Acetate(EA)

3、Halogenated Hydrocarbon



Example:

Methylene Chloride (MC)
Trichloroethyle (TCE)

2. When PET sleeve or case of capacitor dirty with oil that will not dissolved, During production process when their temperature rise up to 80°C, The sleeve will shrink unsmooth.

ALUMINUM ELECTROLYTIC CAPACITORS

STRUCTURE and MATERIALS

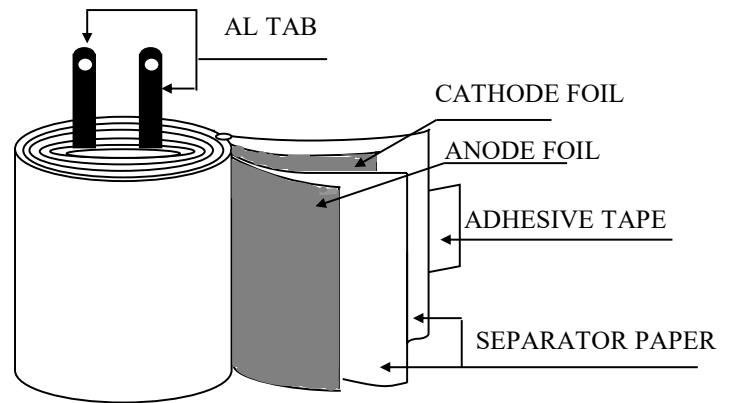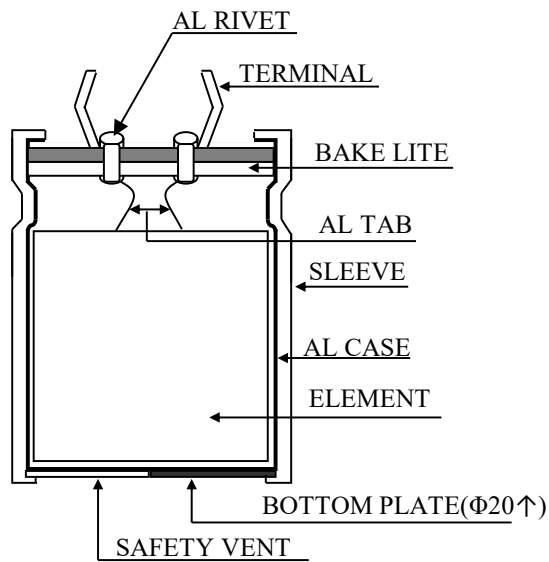

※.LARGE SIZED TYPE CAPACITORS COMPONENT

PART NAME	MATERIALS
AL RIVET	ALUMINUM 99.9%
TERMINAL	SPCC
BAKE LITE	RUBBER+PAPER LAMINATE
AL TAB	ALUMINUM 99.9% OVER
SLEEVE	INK
	P.E.T (Polyethylene Terephthalate Resin)
AL CASE	ALUMINUM 99.5%
ANODE FOIL	FORMED ALUMINUM 99.9% OVER
CATHODE FOIL	FORMED ALUMINUM 98.1% OVER
SEPARATOR PAPER	INSULATION PAPER
ADHESIVE TAPE	POLY PROPYLENE FILM

6. PRECAUTIONS AND GUIDELINES TO USERS

When using aluminum electrolytic capacitors, pay strict attention to the following:

1. Electrolytic capacitors for DC application require polarization.

Confirm the polarity. If used in reversed polarity, the circuit life may be shortened or the capacitor may be damaged. For use on circuits whose polarity is occasionally reversed, or whose polarity is unknown, use bi-polarized capacitors(BP-series). Also, note that the electrolytic capacitor cannot be used for AC application.

2. Do not apply a voltage exceeding the capacitor's voltage rating.

If a voltage exceeding the capacitor's voltage rating is applied, the capacitor may be damaged as leakage current increases. When using the capacitor with AC voltage superimposed on DC voltage, care must be exercised that the peak value of AC voltage does not exceed the rated voltage.

3. Do not allow excessive ripple current to pass.

Use the electrolytic capacitor at current values within the permissible ripple range. If the ripple current exceeds the specified value, request capacitors for high ripple current applications.

4. Ascertain the operating temperature range.

Use the electrolytic capacitors according to the specified operating temperature range. Usage at room temperature will ensure longer life.

5. The electrolytic capacitor is not suitable for circuits in which charge and discharge are frequently repeated.

If used in circuits in which charge and discharge are frequently repeated, the capacitance value may drop, or the capacitor may be damaged. Please consult our engineering department for assistance in these applications.

If the electrolytic capacitor is allowed to stand for a long time, its withstand voltage is liable to drop, resulting in increased leakage current. If the rated voltage is applied to such a product, a large leakage current occurs and this generates internal heat, which damaged the capacitor. If the electrolytic capacitor is allowed to stand for a long time, therefore, use it after giving voltage treatment. (However, the electrolytic capacitors can be guarantee for 2 years if keep in the normal temperature.)

6. Be careful of temperature and time when soldering.

When soldering a printed circuit board with various components, care must be taken that the soldering temperature is not too high and that the dipping time is not too long. Other wise, there will be adverse effects on the electrical characteristics and insulation sleeve of electrolytic capacitors in the case of small-sized electrolytic capacitors, nothing abnormal will occur if dipping is performed at less than 260 °C for less than 10 seconds.

7. Do not place a soldering iron body of the capacitor.

The electrolytic capacitor is covered with a vinyl sleeve. If the soldering iron comes in contact with the electrolytic capacitor body during wiring, damage to the vinyl sleeve and/or case may result in defective insulation, or improper protection

8. Cleaning circuit boards after soldering.

Some solvents have adverse effects on capacitors.

Please refer to the next page.

9. Do not apply excessive force to the lead wires or terminals.

If excessive force is applied to the lead wires and terminals, they may be broken or their connections with the internal elements may be affected. (For strength of terminals, refer to JIS C5101-1, JIS C5101-4)

10. Care should be used in selecting a storage area.

If electrolytic capacitors are exposed to high temperatures caused by such things as direct sunlight, the life of the capacitor may be adversely affected. Storage in a high humidity atmosphere may affect the solderability of lead wires and terminals.

11. Surge voltage:

Rated surge voltage shall be applied for 30 seconds and then shall be applied with discharge, for 330 seconds at room temperature. This cycle shall be repeated for 1000 cycles; Duration of one cycle is 6 minutes; then to judge capacitor's characteristics and appearance.

Rated Voltage(WV)	4	6.3	8	10	16	25	35	50	63	80	100	160	200	250	350	400	420	450	500
Surge Voltage(SV)	5	8	10	13	20	32	44	63	79	100	125	200	250	300	400	450	470	500	550

For methods of testing, refer to JIS C 5101-1, JIS C 5101-4.

※ The above mentioned material according to EIAJRCR-2367B (issued in March, 2002), titled "Guideline of notabilia for aluminum electrolytic capacitors for use in electronic equipment". Please refer to the book for details.

ALUMINUM ELECTROLYTIC CAPACITORS

(尖角型包裝圖)


1) BOX

單位:mm




說明：為了抑制再生電壓產生,包裝時在電容引腳上方放整塊鋁箔,用於短接放電,并在放電紙上放整塊紙板固定,使用前請將整小箱倒置15秒,使電容器正負引腳充分插入鋁箔進行放電.

(INNER BOX)

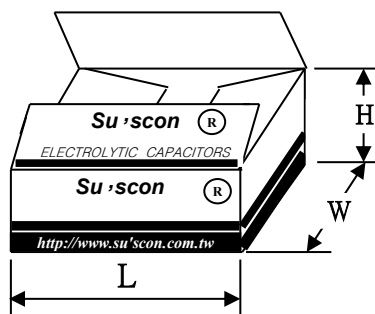

內箱尺寸：
(L)204x(W)204x(H)146

(OUT BOX)

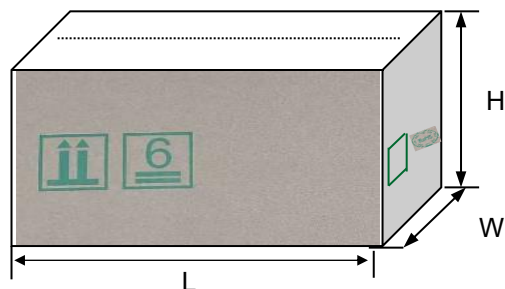

外箱尺寸：
(L)428x(W)214x(H)312

2)明細表

尺寸 (Φ ×L)	每內箱擺放標準	每外箱總數量 (四個內箱合為一個外箱) (KPCS/箱)
35×35	25pcs×2層	0.2