



Features

- Two DTC123J transistors are built-in a package
- Built-in biasing resistors (R1: 2.2kΩ, R2: 47kΩ)
- Transistor elements are independent, eliminating interference
- Mounting cost and area can be cut in half
- RoHS compliant with Halogen-free



Mechanical Data

- Case: SOT-363
- Molding Compound: UL Flammability Classification Rating 94V-0
- Terminals: Matte tin-plated leads; solderable
 MIL-STD-202, Method 208



Ordering Information

Part Number	Package	Shipping Quantity
TPUMH10	SOT-363	3000 pcs / Tape & Reel

Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{CC}	Supply Voltage	50	V
V_I	Input Voltage	-5 to +12	V
I_O	Output Current	100	mA
$I_{C(Max)}$	Collector Current	100	mA

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	150	mW
Thermal Resistance Junction-to-Air *1	$R_{\theta JA}$	413	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Case *1	$R_{\theta JC}$	257	$^\circ\text{C/W}$
Thermal Resistance Junction-to-Lead *1	$R_{\theta JL}$	315	$^\circ\text{C/W}$
Operating Junction Temperature Range	T_J	-55 ~ +150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note 1: The data tested by surface mounted on a 21mm * 17mm * 1mm FR4-epoxy P.C.B

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Input Voltage	$V_{I(\text{OFF})}$	$V_{CC} = 5\text{V}, I_o = 100\mu\text{A}$	0.5	-	-	V
Input Voltage	$V_{I(\text{ON})}$	$V_o = 0.3\text{V}, I_o = 5\text{mA}$	-	-	1.1	V
Output Voltage	$V_{O(\text{on})}$	$I_o = 5\text{mA}, I_i = 0.25\text{mA}$	-	-	0.3	V
Input Current	I_i	$V_i = 5\text{V}$	-	-	3.6	mA
Output Current	$I_{o(\text{off})}$	$V_{CC} = 50\text{V}, V_i = 0\text{V}$	-	-	0.5	μA
DC Current Gain	G_i	$V_o = 5\text{V}, I_o = 10\text{mA}$	80	-	-	-
Input Resistor	R_i		1.54	2.2	2.86	k Ω
Resistance ratio	R_2/R_1		17	21	26	-
Gain-Bandwidth Product	f_T	$V_{CE} = 10\text{V}, I_E = -5\text{mA}$ $f = 100\text{MHz}$	-	250	-	MHz

Ratings and Characteristic Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

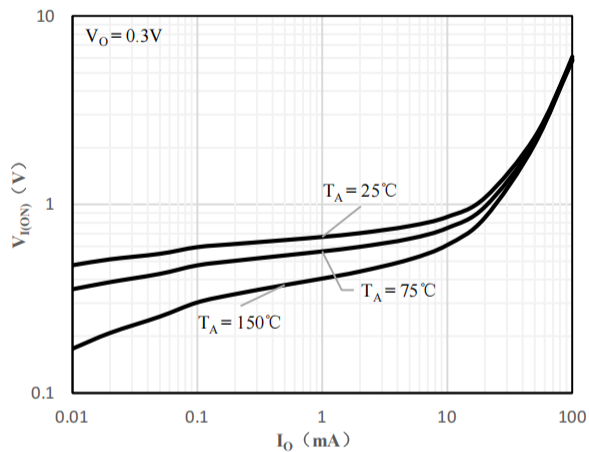


Fig 1 Input Voltage vs Output Current

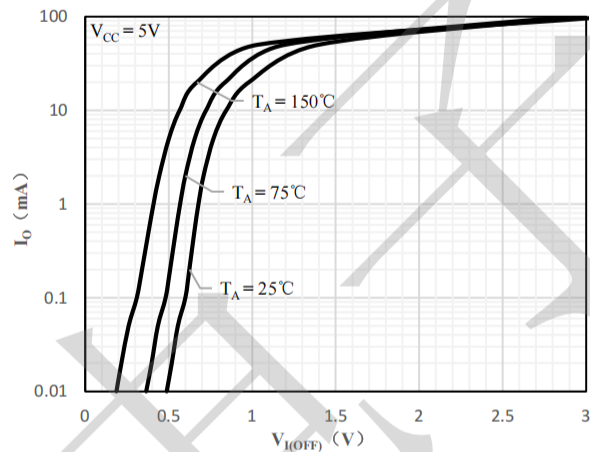


Fig 2 Output Current vs Input Voltage

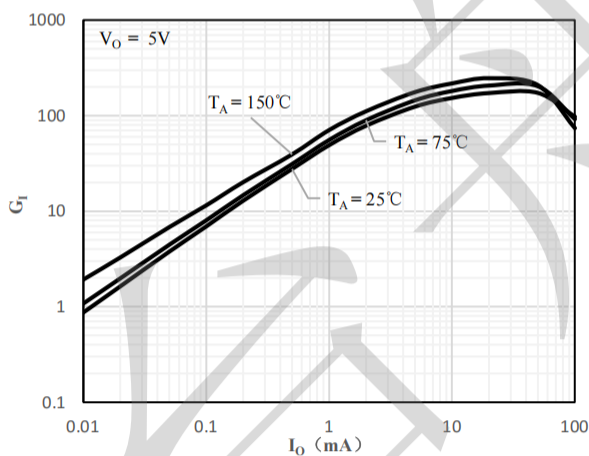


Fig 3 DC Current Gain vs Output Current


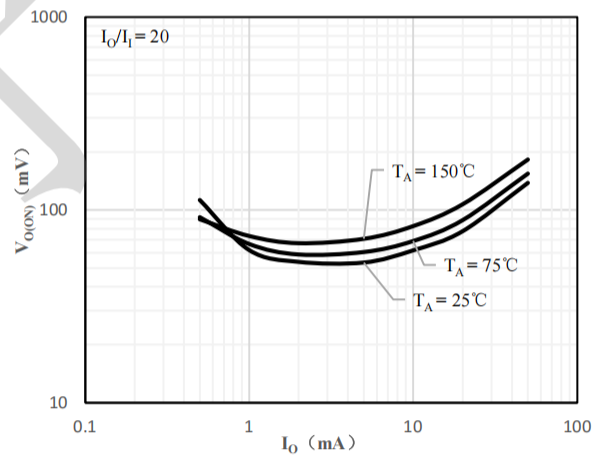


Fig 4 Output Voltage vs Output Current

Package Outline Dimensions (unit:mm)

SOT-363

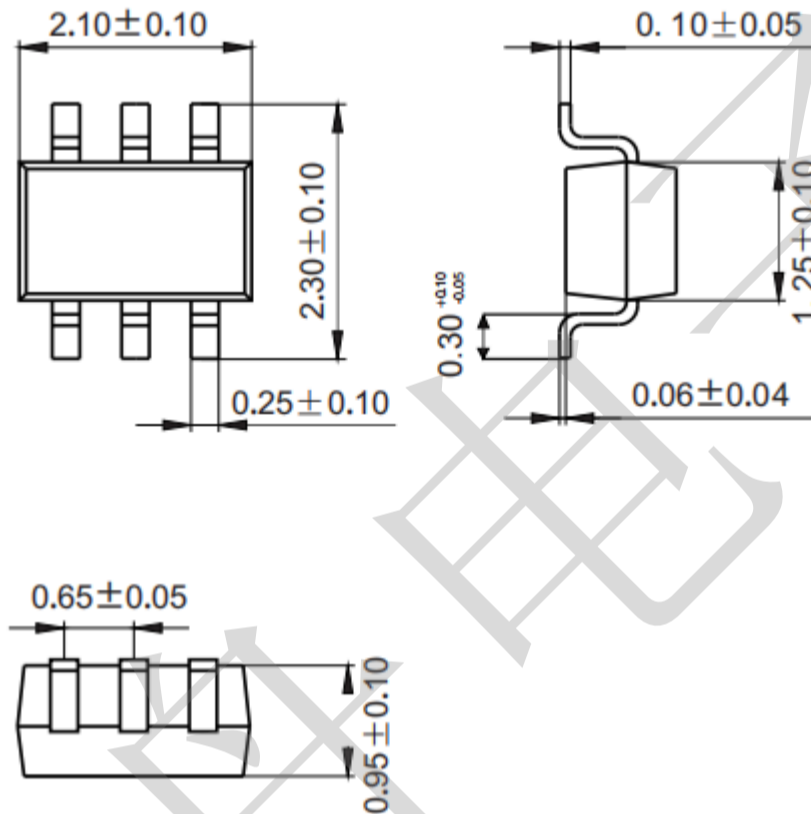

Mounting Pad Layout (unit: mm)

