Silicon Carbide (SiC) Cascode JFET – EliteSiC, Power N-Channel, TO247-3, 750 V, 33 mohm

UJ4C075033K3S



TO247-3
CASE 340AK

Description

The UJ4C075033K3S is a 750 V, 33 mΩ G4 SiC FET. It is based on unique 'cascode' circuit configuration, in which a normally-on SiC JFET is co-packaged with a Si MOSFET to produce a normally-off SiC FET device. The device's standard gate-drive characteristics allows for a true "drop-in replacement" to Si IGBTs, Si FETs, SiC MOSFETs or Si superjunction devices. Available in the TO247-3 package, this device exhibits ultra-low gate charge and exceptional reverse recovery characteristics, making it ideal for switching inductive loads and any application requiring standard gate drive.

Features

- On-Resistance $R_{DS(on)}$: 33 mΩ (typ)
- Operating Temperature: 175 °C (max)
- Excellent Reverse Recovery: Qrr = 71 nC
- Low Body Diode V_{FSD}: 1.26 V
- Low Gate Charge: Q_G = 37.8nC
- Threshold Voltage $V_{G(th)}$: 4.8 V (typ) Allowing 0 to 15 V Drive
- Low Intrinsic Capacitance
- ESD Protected: HBM Class 2 and CDM Class C3
- This Device is Pb-Free, Halogen Free and is RoHS Compliant

Typical Applications

- EV Charging
- PV Inverters
- Switch Mode Power Supplies
- Power Factor Correction Modules
- Motor Drives
- Induction Heating

MARKING DIAGRAM

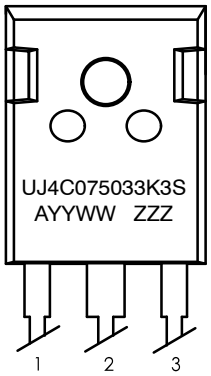

UJ4C075033K3S	= Specific Device Number
A	= Assembly Location
YY	= Year
WW	= Work Week
ZZZ	= Lot ID

PIN CONNECTIONS

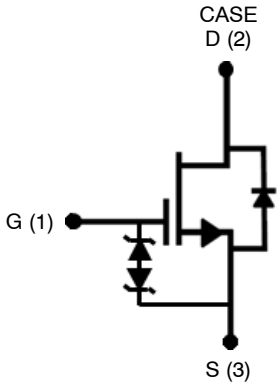

ORDERING INFORMATION

See detailed ordering and shipping information on page 11 of this data sheet.

© Semiconductor Components Industries, LLC, 2024

MAXIMUM RATINGS

Symbol	Parameter	Test Conditions	Value	Unit
V_{DS}	Drain-Source Voltage		750	V
V_{GS}	Gate-Source Voltage	DC	−20 to +20	V
		AC (f > 1 Hz)	−25 to +25	V
I_D	Continuous Drain Current (Note 1)	T_C = 25 °C	47	A
		T_C = 100 °C	35	A
I_{DM}	Pulsed Drain Current (Note 2)	T_C = 25 °C	140	A
E_{AS}	Single Pulsed Avalanche Energy (Note 3)	L = 15 mH, I_{AS} = 2.4 A	43	mJ
dv/dt	SiC FET dv/dt Ruggedness	V_{DS} ≤ 500 V	200	V/ns
P_{tot}	Power Dissipation	T_C = 25 °C	242	W
$T_{J,max}$	Maximum Junction Temperature		175	°C
T_J, T_{STG}	Operating and Storage Temperature		−55 to 175	°C
T_L	Max. Lead Temperature for Soldering, 1/8” from Case for 5 Seconds		250	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Limited by $T_{J,max}$.
2. Pulse width t_p limited by $T_{J,max}$.
3. Starting T_J = 25 °C.

THERMAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case		–	0.48	0.62	°C/W

ELECTRICAL CHARACTERISTICS (T_J = +25 °C unless otherwise specified)

Symbol	Parameter	Test Conditions		Min	Typ	Max	Unit
TYPICAL PERFORMANCE – STATIC							
BV_{DS}	Drain-Source Breakdown Voltage	V_{GS} = 0 V, I_D = 1 mA		750	–	–	V
I_{DSS}	Total Drain Leakage Current	V_{DS} = 750 V, V_{GS} = 0 V, T_J = 25 °C		–	2	20	μA
		V_{DS} = 750 V, V_{GS} = 0 V, T_J = 175 °C		–	20	–	
I_{GSS}	Total Gate Leakage Current	V_{DS} = 0 V , T_J = 25 °C V_{GS} = −20 V / +20 V		–	6	±20	μA
$R_{DS(on)}$	Drain-Source On-resistance	V_{GS} = 12 V, I_D = 30 A	T_J = 25 °C	–	33	41	mΩ
			T_J = 125 °C	–	57	–	
			T_J = 175 °C	–	75	–	
$V_{G(th)}$	Gate Threshold Voltage	V_{DS} = 5 V, I_D = 10 mA		4	4.8	6	V
R_G	Gate Resistance	f = 1 MHz, open drain		–	4.5	–	Ω
TYPICAL PERFORMANCE – REVERSE DIODE							
I_S	Diode Continuous Forward Current (Note 1)	T_C = 25 °C		–	–	47	A
$I_{S,pulse}$	Diode Pulse Current (Note 2)	T_C = 25 °C		–	–	140	A
V_{FSD}	Forward Voltage	V_{GS} = 0 V, I_S = 15 A, T_J = 25 °C		–	1.26	1.42	V
		V_{GS} = 0 V, I_S = 15 A, T_J = 175 °C		–	1.59	–	
Q_{rr}	Reverse Recovery Charge	V_R = 400 V, I_S = 30 A, V_{GS} = 0 V, R_{G_EXT} = 5 Ω, di/dt = 1600 A/μs, T_J = 25 °C		–	71	–	nC
t_{rr}	Reverse Recovery Time			–	11.5	–	ns

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (T_J = +25 °C unless otherwise specified) (continued)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
TYPICAL PERFORMANCE – REVERSE DIODE(CONTINUED)						
Q_{rr}	Reverse Recovery Charge	V_R = 400 V, I_S = 30 A, V_{GS} = 0 V, R_{G_EXT} = 5 Ω, di/dt = 1600 A/μs, T_J = 150 °C	–	79	–	nC
t_{rr}	Reverse Recovery Time		–	12	–	ns
TYPICAL PERFORMANCE – DYNAMIC						
C_{iss}	Input Capacitance	V_{DS} = 400 V, V_{GS} = 0 V, f = 100 kHz	–	1400	–	pF
C_{oss}	Output Capacitance		–	68	–	
C_{rss}	Reverse Transfer Capacitance		–	2.5	–	
$C_{oss(er)}$	Effective Output Capacitance, Energy Related	V_{DS} = 0 V to 400 V, V_{GS} = 0 V	–	83	–	pF
$C_{oss(tr)}$	Effective Output Capacitance, Time Related		–	162	–	pF
E_{oss}	C_{OSS} Stored Energy	V_{DS} = 400 V, V_{GS} = 0 V	–	6.6	–	μJ
Q_G	Total Gate Charge	V_{DS} = 400 V, I_D = 30 A, V_{GS} = 0 V to 15 V	–	37.8	–	nC
Q_{GD}	Gate-Drain Charge		–	8	–	
Q_{GS}	Gate-Source Charge		–	11.8	–	
$t_{d(on)}$	Turn-on Delay Time	Notes 4 and 5 V_{DS} = 400 V, I_D = 30 A, Gate Driver = 0 V, to +15 V, Turn-on $R_{G,EXT}$ = 1 Ω, Turn-off $R_{G,EXT}$ = 5 Ω, Inductive Load, FWD: same device with V_{GS} = 0 V and R_G = 5 Ω, RC snubber: R_S = 15 Ω and C_S = 100 pF, T_J = 25 °C	–	14	–	ns
t_r	Rise Time		–	32	–	
$t_{d(off)}$	Turn-off Delay Time		–	19	–	
t_f	Fall Time		–	9	–	
E_{ON}	Turn-on Energy Including R_S Energy		–	253	–	μJ
E_{OFF}	Turn-off Energy Including R_S Energy		–	52	–	
E_{TOTAL}	Total Switching Energy		–	305	–	
E_{RS_ON}	Snubber R_S Energy During Turn-on		–	2.9	–	
E_{RS_OFF}	Snubber R_S Energy During Turn-off		–	5.5	–	
$t_{d(on)}$	Turn-on Delay Time	Notes 4 and 5 V_{DS} = 400 V, I_D = 30 A, Gate Driver = 0 V, to +15 V, Turn-on $R_{G,EXT}$ = 1 Ω, Turn-off $R_{G,EXT}$ = 5 Ω, Inductive Load, FWD: same device with V_{GS} = 0 V and R_G = 5 Ω, RC snubber: R_S = 15 Ω and C_S = 100 pF, T_J = 150 °C	–	12	–	ns
t_r	Rise Time		–	35	–	
$t_{d(off)}$	Turn-off Delay Time		–	23	–	
t_f	Fall Time		–	10	–	
E_{ON}	Turn-on Energy Including R_S Energy		–	273	–	μJ
E_{OFF}	Turn-off Energy Including R_S Energy		–	68	–	
E_{TOTAL}	Total Switching Energy		–	341	–	
E_{RS_ON}	Snubber R_S Energy During Turn-on		–	3	–	
E_{RS_OFF}	Snubber R_S Energy During Turn-off		–	5	–	
$t_{d(on)}$	Turn-on Delay Time	Notes 6 V_{DS} = 400 V, I_D = 30 A, Gate Driver = 0 V, to +15 V, Turn-on $R_{G,EXT}$ = 1 Ω, Turn-off $R_{G,EXT}$ = 5 Ω, Inductive Load, FWD: UJ3D06520TS RC snubber: R_S = 15 Ω and C_S = 100 pF, T_J = 25 °C	–	11	–	ns
t_r	Rise Time		–	31	–	
$t_{d(off)}$	Turn-off Delay Time		–	13	–	
t_f	Fall Time		–	9	–	
E_{ON}	Turn-on Energy Including R_S Energy		–	225	–	μJ
E_{OFF}	Turn-off Energy Including R_S Energy		–	49	–	
E_{TOTAL}	Total Switching Energy		–	274	–	
E_{RS_ON}	Snubber R_S Energy During Turn-on		–	2.6	–	
E_{RS_OFF}	Snubber R_S Energy During Turn-off		–	7	–	

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS (T_J = +25 °C unless otherwise specified) (continued)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
TYPICAL PERFORMANCE – DYNAMIC						
$t_{d(on)}$	Turn-on Delay Time	Notes 6 V_{DS} = 400 V, I_D = 30 A, Gate Driver = 0 V, to +15 V, Turn-on $R_{G,EXT}$ = 1 Ω, Turn-off $R_{G,EXT}$ = 5 Ω, Inductive Load, FWD: UJ3D06520TS RC snubber: R_S = 15 Ω and C_S = 100 pF, T_J = 150 °C	–	15	–	ns
t_r	Rise Time		–	31	–	
$t_{d(off)}$	Turn-off Delay Time		–	19	–	
t_f	Fall Time		–	10	–	
E_{ON}	Turn-on Energy Including R_S Energy		–	265	–	μJ
E_{OFF}	Turn-off Energy Including R_S Energy		–	81	–	
E_{TOTAL}	Total Switching Energy		–	346	–	
E_{RS_ON}	Snubber R_S Energy During Turn-on		–	2	–	
E_{RS_OFF}	Snubber R_S Energy During Turn-off		–	5	–	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Measured with the switching test circuit in Figure 35.
5. In this datasheet, all the switching energies (turn-on energy, turn-off energy and total energy) presented in the tables and Figures include the device RC snubber energy losses.
6. Measured with the switching test circuit in Figure 36.

Share Feedback
Your Opinion Matters

TYPICAL PERFORMANCE DIAGRAMS

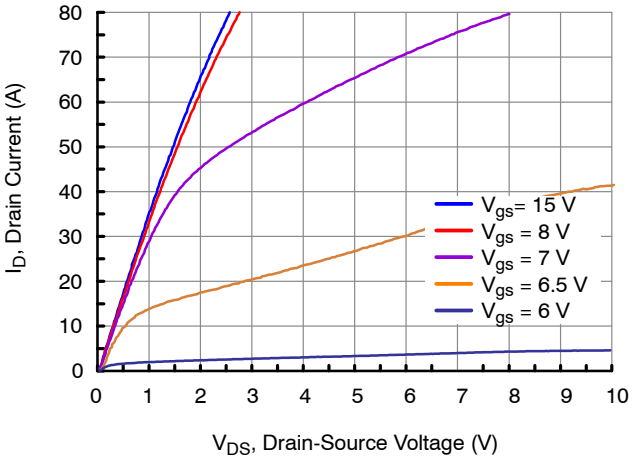

Figure 1. Typical Output Characteristics at T_J = −55 °C, t_p < 250 μs

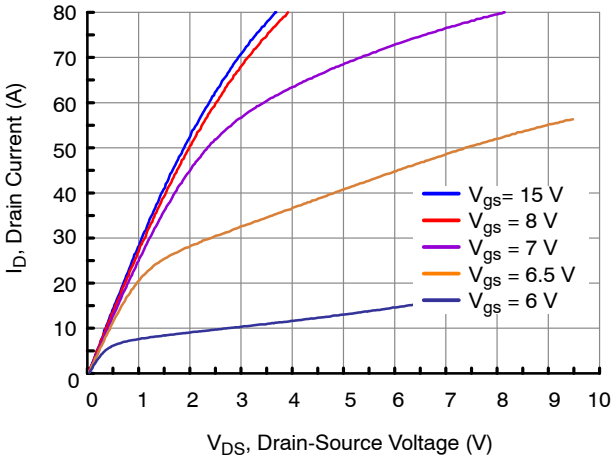

Figure 2. Typical Output Characteristics at T_J = 25 °C, t_p < 250 μs

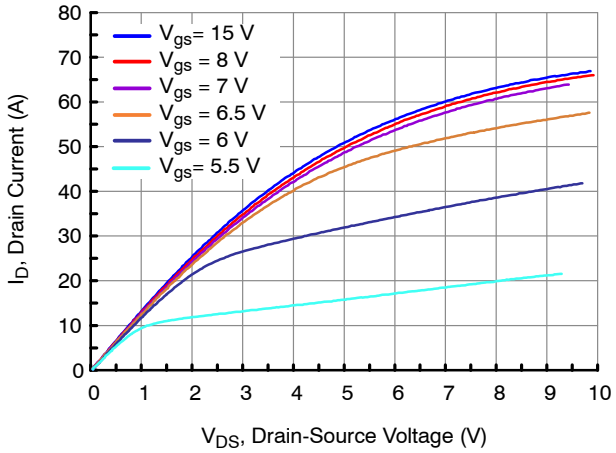

Figure 3. Typical Output Characteristics at T_J = 175 °C, t_p < 250 μs

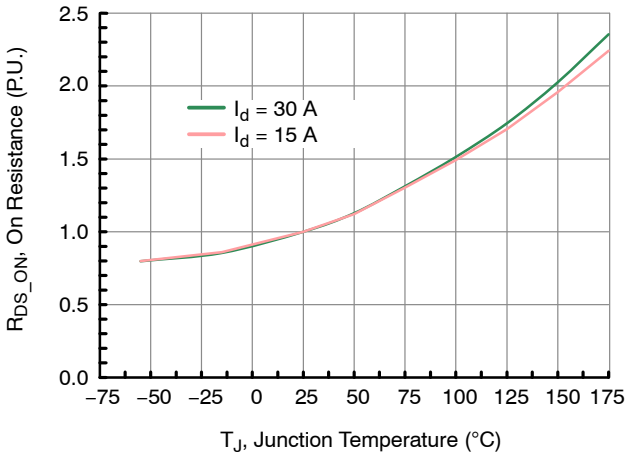

Figure 4. Normalized On-Resistance vs. Temperature at V_{GS} = 12 V

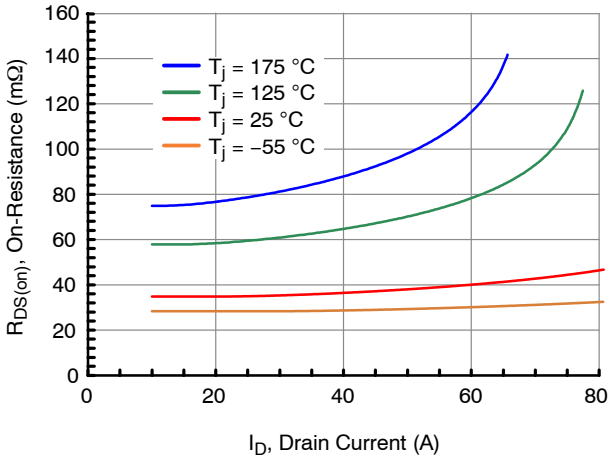

Figure 5. Typical Drain-Source On-Resistances at V_{GS} = 12 V

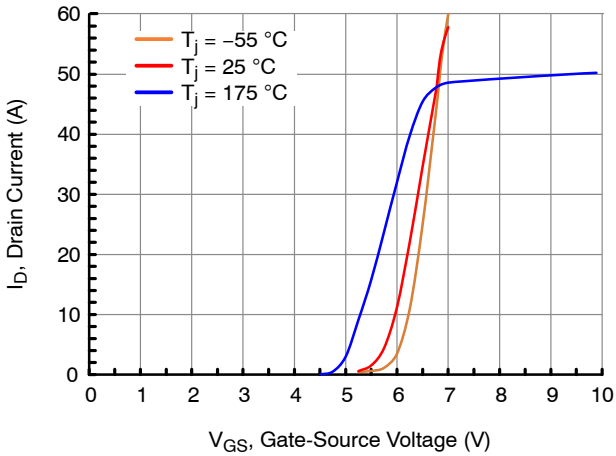

Figure 6. Typical Transfer Characteristics at V_{DS} = 5 V

Share Feedback
Your Opinion Matters

TYPICAL PERFORMANCE DIAGRAMS (continued)

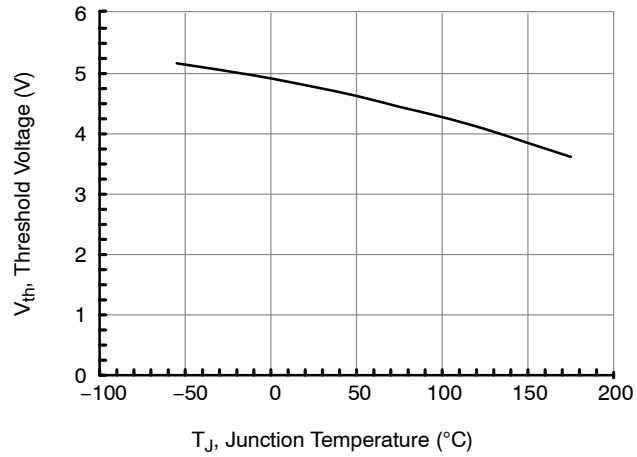

Figure 7. Threshold Voltage vs. Junction Temperature at V_{DS} = 5 V and I_D = 10 mA

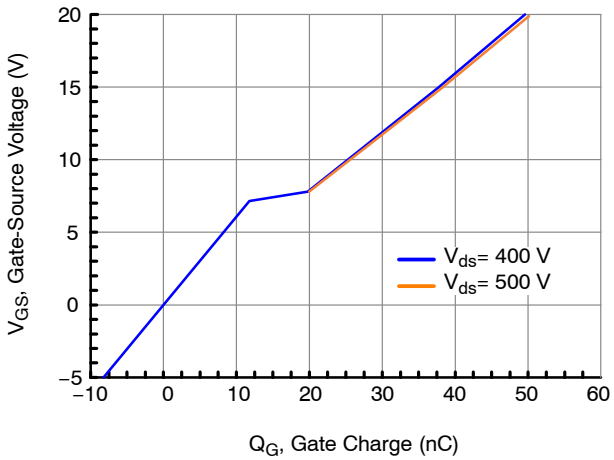

Figure 8. Typical Gate Charge at I_D = 30 A

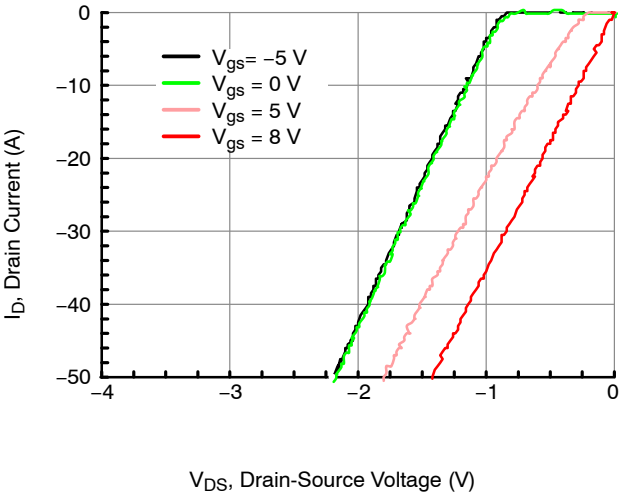

Figure 9. 3rd Quadrant Characteristics at T_J = −55 °C

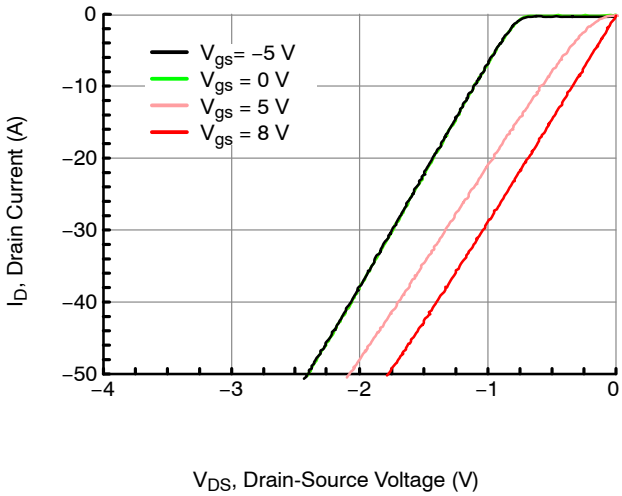

Figure 10. 3rd Quadrant Characteristics at T_J = 25 °C

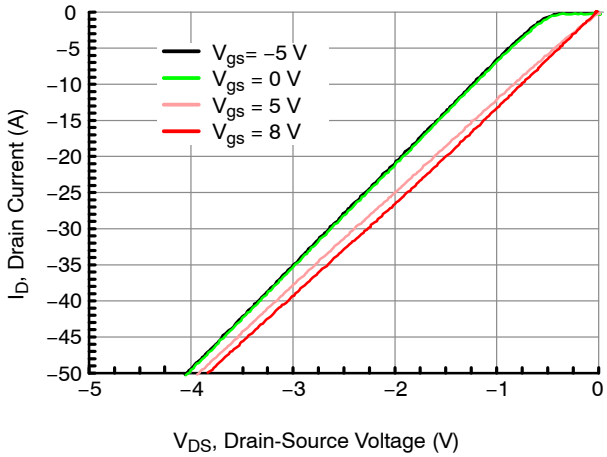

Figure 11. 3rd Quadrant Characteristics at T_J = 175 °C

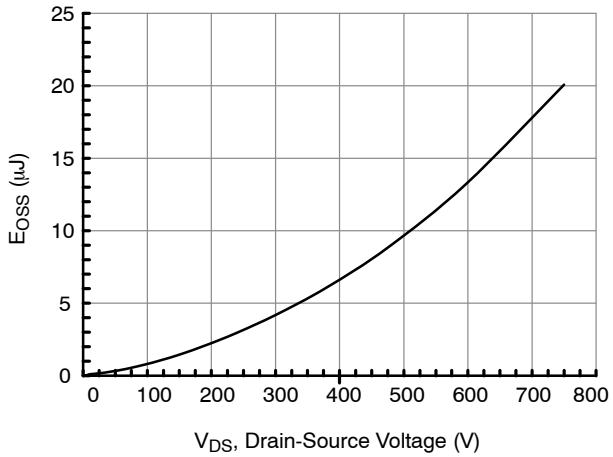

Figure 12. Typical Stored Energy in C_{OSS} at V_{GS} = 0 V

Share Feedback
Your Opinion Matters

TYPICAL PERFORMANCE DIAGRAMS (continued)

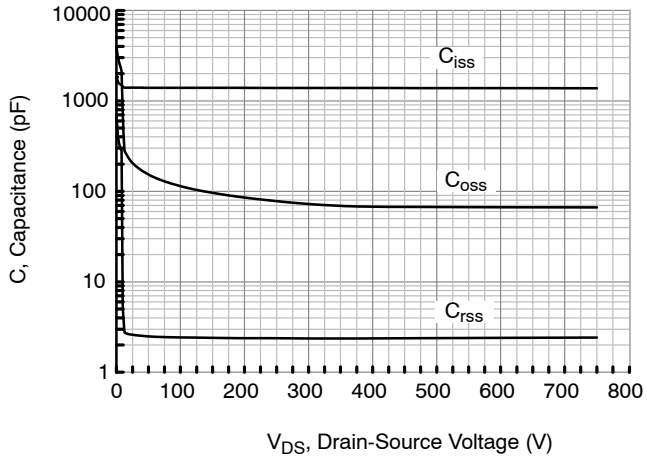

Figure 13. Typical Capacitances at f = 100 kHz and V_{GS} = 0 V

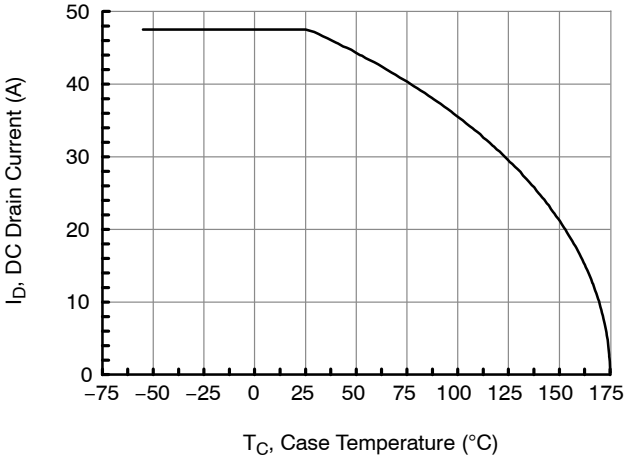

Figure 14. DC Drain Current Derating

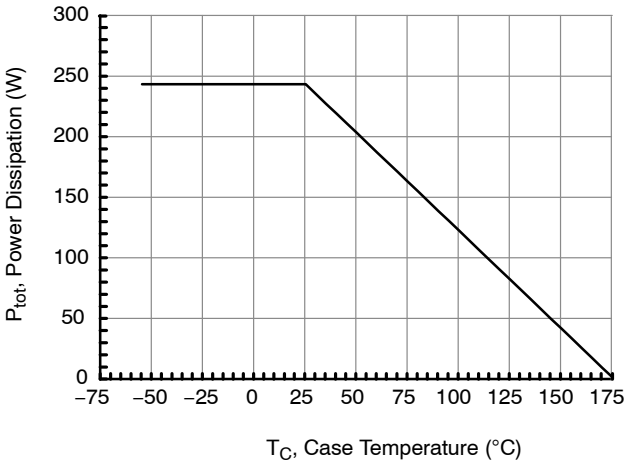

Figure 15. Total Power Dissipation

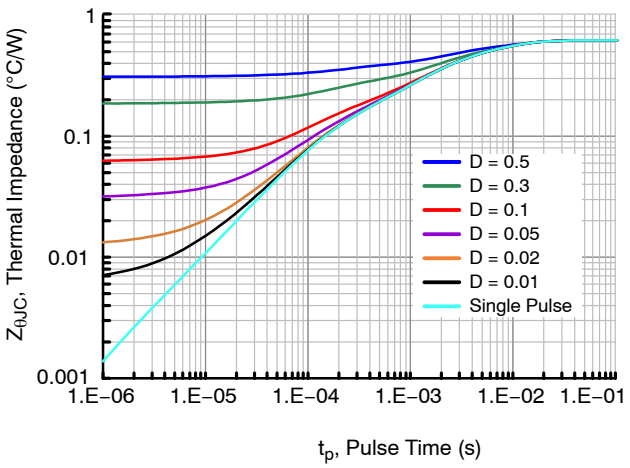

Figure 16. Maximum Transient Thermal Impedance

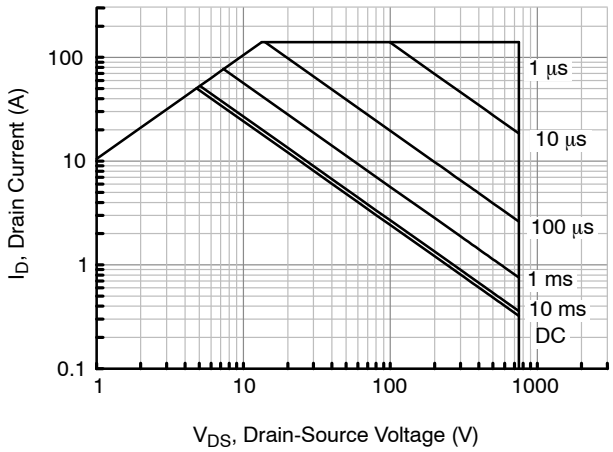

Figure 17. Safe Operation Area at T_C = 25 °C, D = 0, Parameter t_p

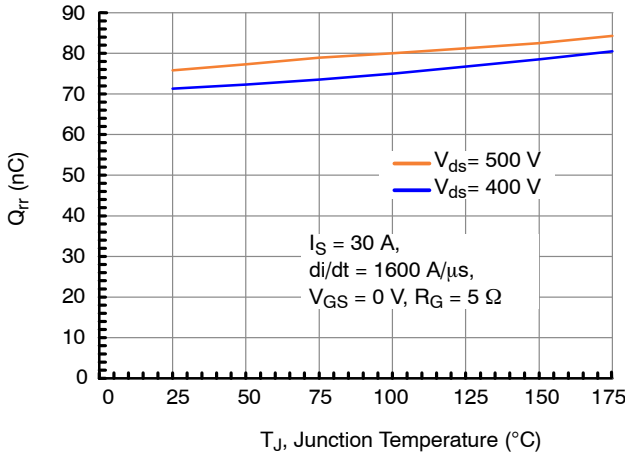

Figure 18. Reverse Recovery Charge Q_{rr} vs. Junction Temperature

Share Feedback
Your Opinion Matters

TYPICAL PERFORMANCE DIAGRAMS (continued)

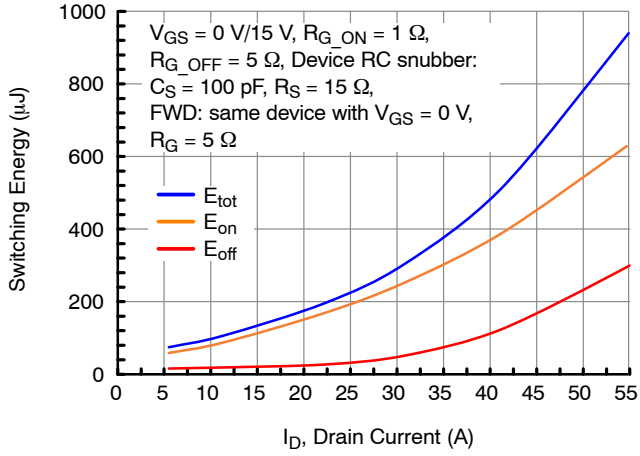

Figure 19. Clamped Inductive Switching Energy vs. Drain Current at V_{DS} = 400 V and T_J = 25 °C

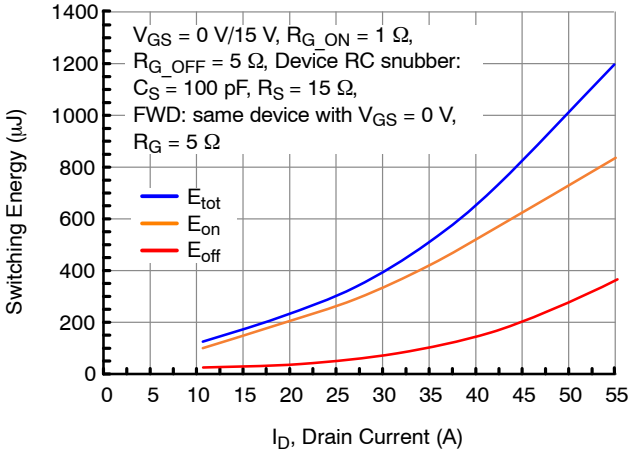

Figure 20. Clamped Inductive Switching Energy vs.Drain Current at V_{DS} = 500 V, and T_J = 25 °C

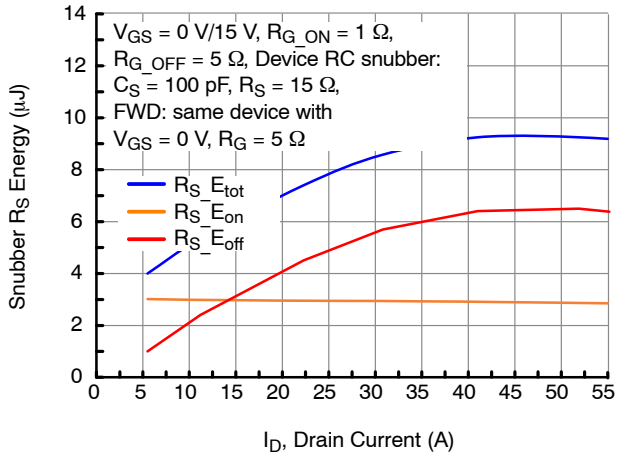

Figure 21. RC Snubber Energy Loss vs. Drain Current at V_{DS} = 400 V and T_J = 25 °C

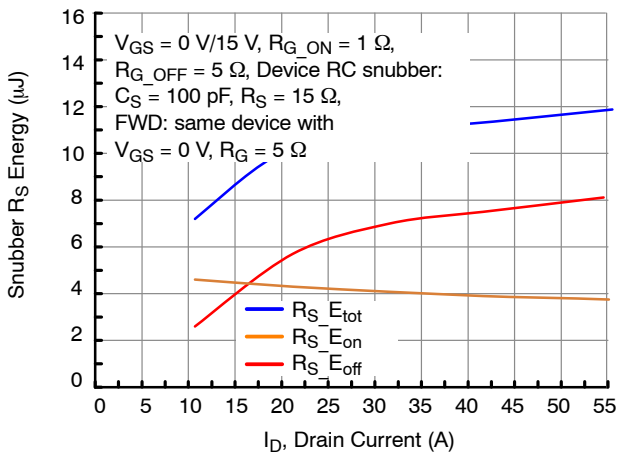

Figure 22. RC Snubber Energy Losses vs. Drain Current at V_{DS} = 500 V and T_J = 25 °C

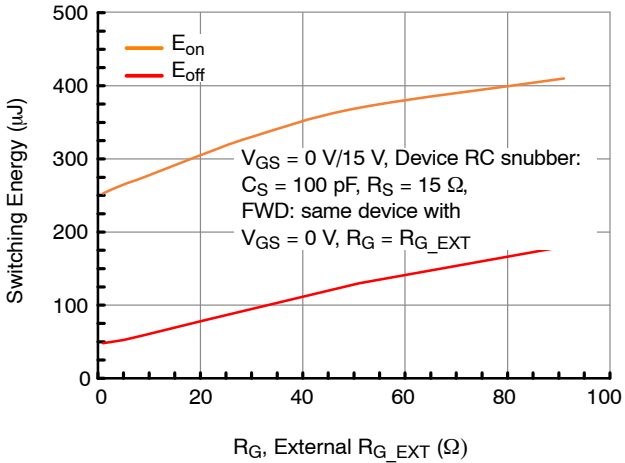

Figure 23. Clamped Inductive Switching Energies vs. R_{G_EXT} at V_{DS} = 400 V, I_D = 30 A and T_J = 25 °C

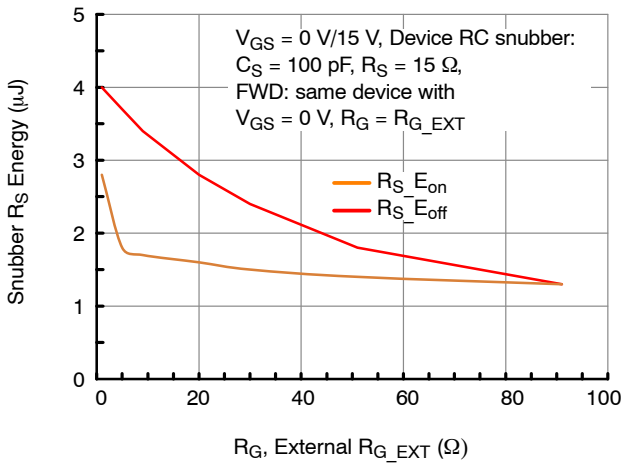

Figure 24. RC Snubber Energy Losses vs. R_{G_EXT} at V_{DS} = 400 V, I_D = 30 A and T_J = 25 °C

Share Feedback
Your Opinion Matters

TYPICAL PERFORMANCE DIAGRAMS (continued)

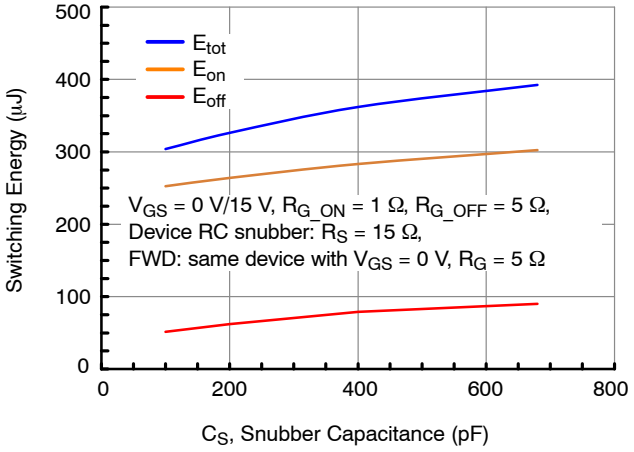

Figure 25. Clamped Inductive Switching Energies vs. Snubber Capacitance C_S at V_{DS} = 400 V, I_D = 30 A and T_J = 25 °C

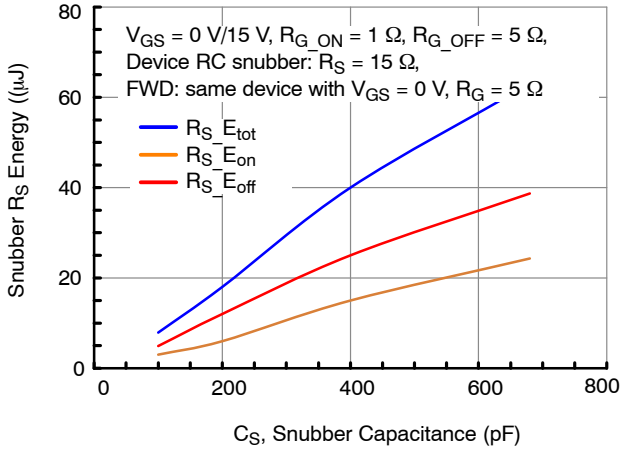

Figure 26. RC Snubber Energy Losses vs. Snubber Capacitance C_S at V_{DS} = 400 V, I_D = 30 A and T_J = 25 °C

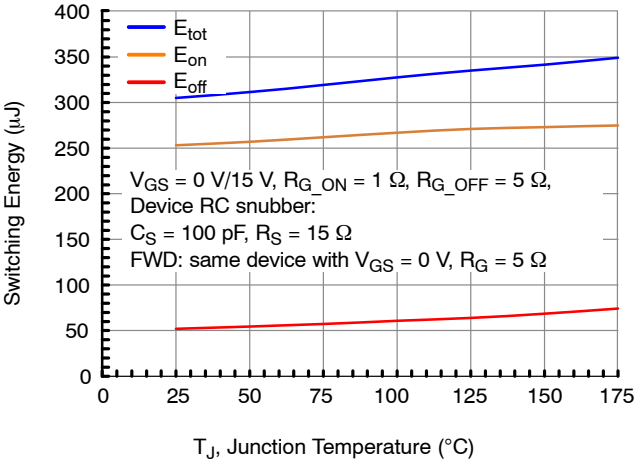

Figure 27. Clamped Inductive Switching Energy vs. Junction Temperature at V_{DS} = 400 V and I_D = 30 A

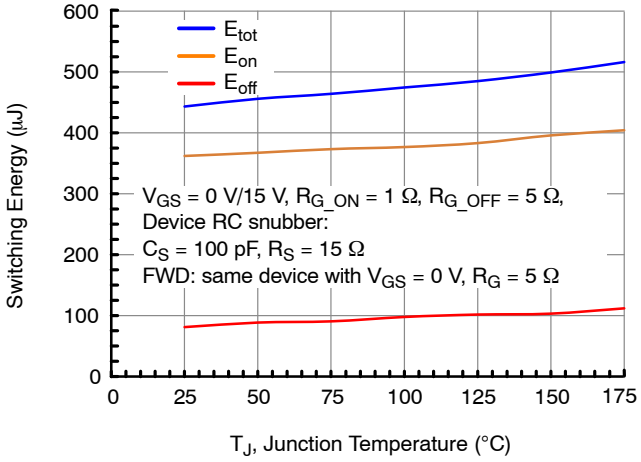

Figure 28. Clamped Inductive Switching Energy vs. Junction Temperature at V_{DS} = 500 V, I_D = 30 A

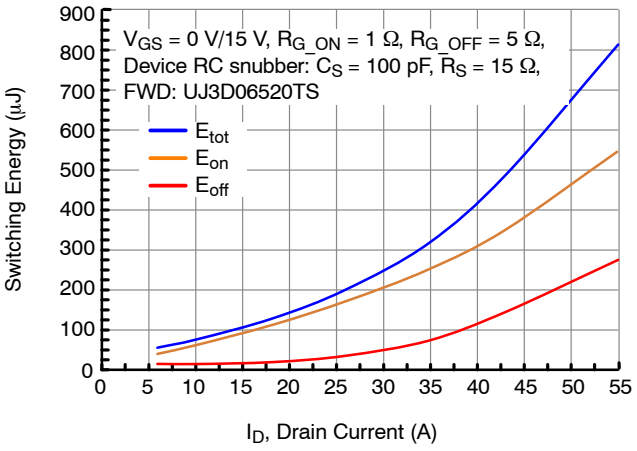

Figure 29. Clamped Inductive Switching Energy vs. Drain Current at V_{DS} = 400 V and T_J = 25 °C

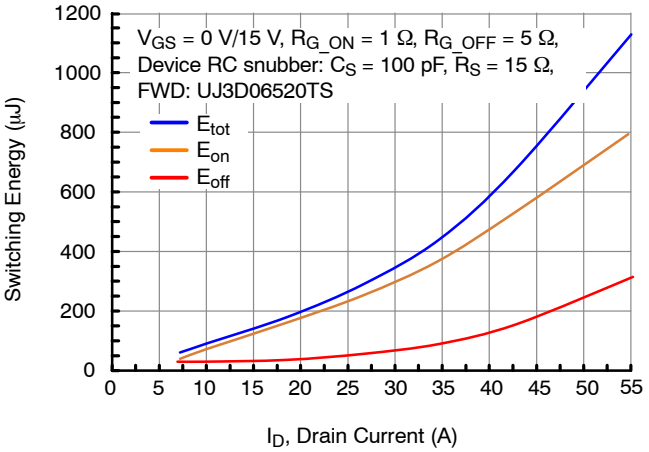

Figure 30. Clamped Inductive Switching Energy vs. Drain Current at V_{DS} = 500 V and T_J = 25 °C

Share Feedback
Your Opinion Matters

TYPICAL PERFORMANCE DIAGRAMS (continued)

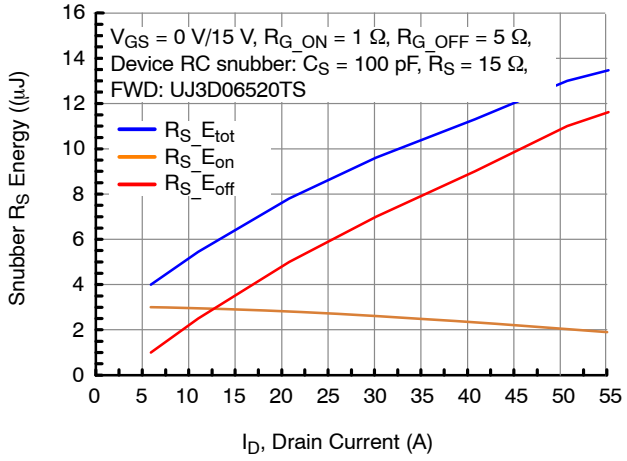

Figure 31. RC Snubber Energy Losses vs. Drain Current at V_{DS} = 400 V and T_J = 25 °C

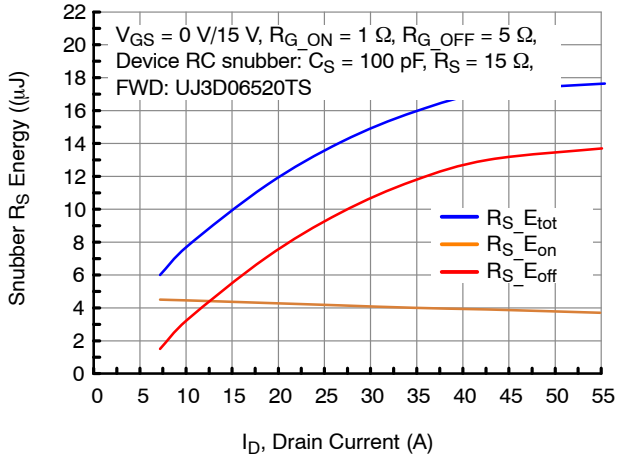

Figure 32. RC Snubber Energy Losses vs. Drain Current at V_{DS} = 500 V and T_J = 25 °C

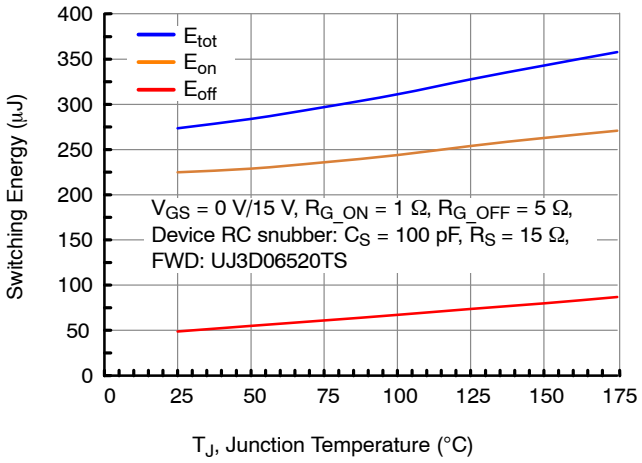

Figure 33. Clamped Inductive Switching Energy vs. Junction Temperature at V_{DS} = 400 V and I_D = 30 A

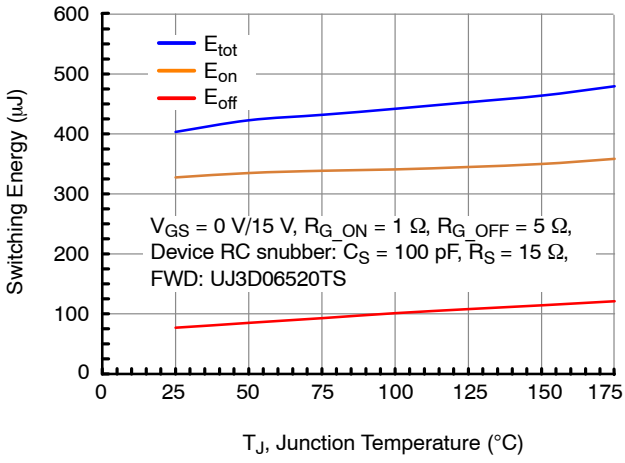

Figure 34. Clamped Inductive Switching Energy vs. Junction Temperature at V_{DS} = 500 V and I_D = 30 A

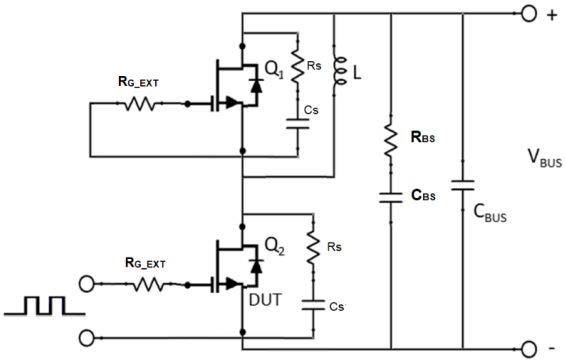

Figure 35. Schematic of the Half-Bridge Mode Switching Test Circuit. Note, a Bus RC Snubber (R_{BS} = 2.5 Ω, C_{BS} =100 nF) is Used to Reduce the Power Loop High Frequency Oscillations.

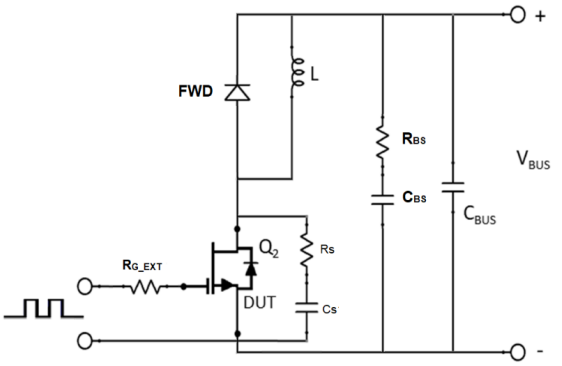

Figure 36. Schematic of the Chopper Mode Switching Test Circuit. Note, a Bus RC Snubber (R_{BS} = 2.5 Ω, C_{BS} =100 nF) is Used to Reduce the Power Loop High Frequency Oscillations.

Share Feedback
Your Opinion Matters

APPLICATIONS INFORMATION

SiC FETs are enhancement-mode power switches formed by a high-voltage SiC depletion-mode JFET and a low-voltage silicon MOSFET connected in series. The silicon MOSFET serves as the control unit while the SiC JFET provides high voltage blocking in the off state. This combination of devices in a single package provides compatibility with standard gate drivers and offers superior performance in terms of low on-resistance ($R_{DS(on)}$), output capacitance (C_{oss}), gate charge (Q_G), and reverse recovery charge (Q_{rr}) leading to low conduction and switching losses. The SiC FETs also provide excellent reverse conduction capability eliminating the need for an external anti-parallel diode.

Like other high performance power switches, proper PCB layout design to minimize circuit parasitics is strongly recommended due to the high dv/dt and di/dt rates. An external gate resistor is recommended when the FET is working in the diode mode in order to achieve the optimum reverse recovery performance. For more information on SiC FET operation, see www.onsemi.com.

A snubber circuit with a small $R_{(G)}$, or gate resistor, provides better EMI suppression with higher efficiency compared to using a high $R_{(G)}$ value. There is no extra gate delay time when using the snubber circuitry, and a small $R_{(G)}$ will better control both the turn-off $V_{(DS)}$ peak spike and ringing duration, while a high $R_{(G)}$ will damp the peak spike but result in a longer delay time. In addition, the total switching loss when using a snubber circuit is less than using high $R_{(G)}$, while greatly reducing $E_{(OFF)}$ from mid-to-full load range with only a small increase in $E_{(ON)}$. Efficiency will therefore improve with higher load current. For more information on how a snubber circuit will improve overall system performance, visit the **onsemi** website at www.onsemi.com.

ORDERING INFORMATION

Part Number	Marking	Package	Shipping
UJ4C075033K3S	UJ4C075033K3S	TO247-3 (Pb-Free, Halogen Free)	600 Units / Tube

Share Feedback
Your Opinion Matters

REVISION HISTORY

Revision	Description of Changes	Date
C	Acquired the original Qorvo JFET Division Data Sheet and updated the main document title to comply with onsemi standards for SiC products.	1/15/2025
3	Converted the Data Sheet to **onsemi** format.	6/2/2025

Share Feedback
Your Opinion Matters



TO247−3 15.90x20.96x5.03, 5.44P
CASE 340AK
ISSUE B

DATE 14 APR 2025

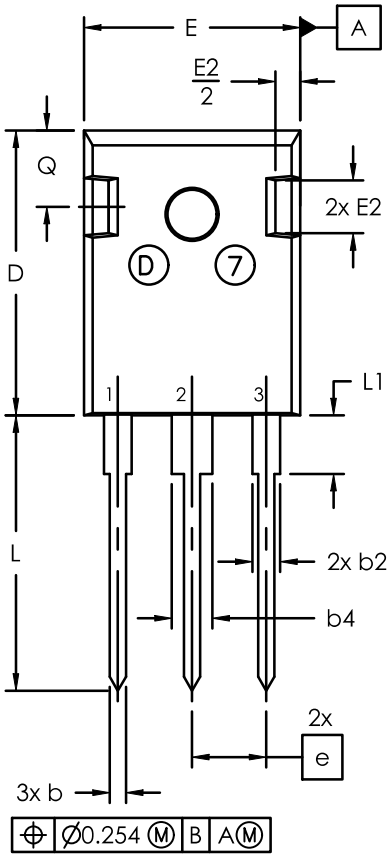

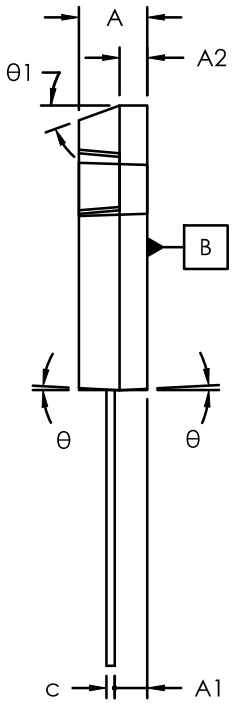

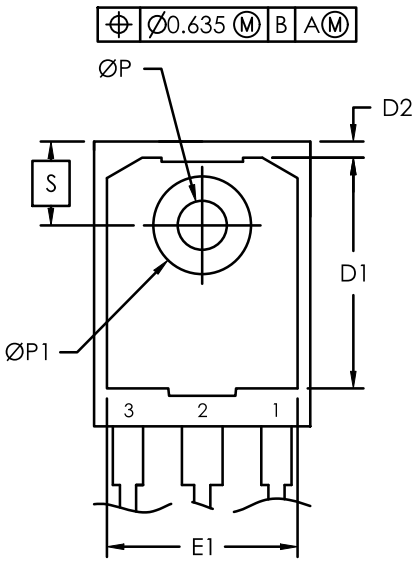



SYM	millimeters		
	MIN	NOM	MAX
A	4.70	5.03	5.31
A1	2.21	2.40	2.59
A2	1.50	2.03	2.49
b	0.99	1.20	1.40
b2	1.65	2.03	2.39
b4	2.59	3.00	3.43
c	0.38	0.60	0.89
D	20.70	20.96	21.46
D1	13.08	—	—
D2	0.51	1.19	1.35
E	15.49	15.90	16.26
e	5.44 BSC		
E1	13.00	13.30	13.60
E2	3.43	3.89	5.20
L	19.62	20.27	20.32
L1	—	—	4.50
ØP	3.40	3.60	3.80
ØP1	7.06	7.19	7.39
Q	5.38	5.62	6.20
S	6.15 BSC		
θ	3°		
θ1	20°		
θ2	10°		

NOTE:
1. Dimensioning and tolerancing as per ASME Y14.5 - 2018
2. Controlling dimension : millimeters
3. Package Outline in compliance with JEDEC standard var. AD.
4. Dimensions D & E does not include mold flash.
5. ØP to have max draft angle of 1.7° to the top with max. hole diameter of 3.91mm.

DOCUMENT NUMBER:	**98AON88794E**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**TO247−3 15.90x20.96x5.03, 5.44P**		**PAGE 1 OF 1**

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2025

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales