


■ DESCRIPTION

When used in balanced line applications, the revolutionary design provides simultaneous line-to-line and line-to-ground filtering, using a single ceramic chip. In this way, differential and common mode filtering are provided in one device.

For unbalanced applications, it provides ultralow ESL (equivalent series inductance). Capable of replacing 2 or more conventional devices, it is ideal for balanced and unbalanced lines.

The BDL device performs as a broadband filter enabling better EMC compliance for electrical equipment in a wide range of applications.



■ FEATURE

BDL is effective up to 10 GHz and frequencies beyond

Noise cancellation within BDL makes ESL reducing from nanohenry to picohenry levels

Unlike feedthrough capacitors, BDL is in bypass, so no DC current limitations

Two tightly matched line to ground capacitors in one device

Temperature and voltage variations balanced of two Y-caps

Aging effects are equal on two Y-caps

■ ADVANTAGES

- Replace up to 7 components with one BDL
- Matched capacitance line to ground, both lines
- One device for EMI suppression or decoupling
- Differential and common mode attenuation
- Low inductance due to cancellation effect
- AEC-Q200 qualified

■ APPLICATIONS


- Amplifier Filter & Decoupling
- DDR Memory
- High Speed Data Filtering
- FPGA/ASIC Decoupling
- DC Motor

■ QUICK REFERENCE DATA


DESCRIPTION	VALUE
Rated voltage	50V
SRF	3600MHz
Insulation Resistance	IR>500Ω•F or 10GΩ whichever is less Measurement at 25℃,WVDC,time is 2 minutes max.
Dissipation Factor	≤2.5%(0.025)
Dielectric Strength	2.5XWVDC,25℃
Operating temperature range	-55℃ to +125℃
Test voltage(DC)for 1 minute	2.5×UR
Capacitance	2.8pF±20%

■ DEVICE ORDERING INFORMATION


BDL0603S3600V500T

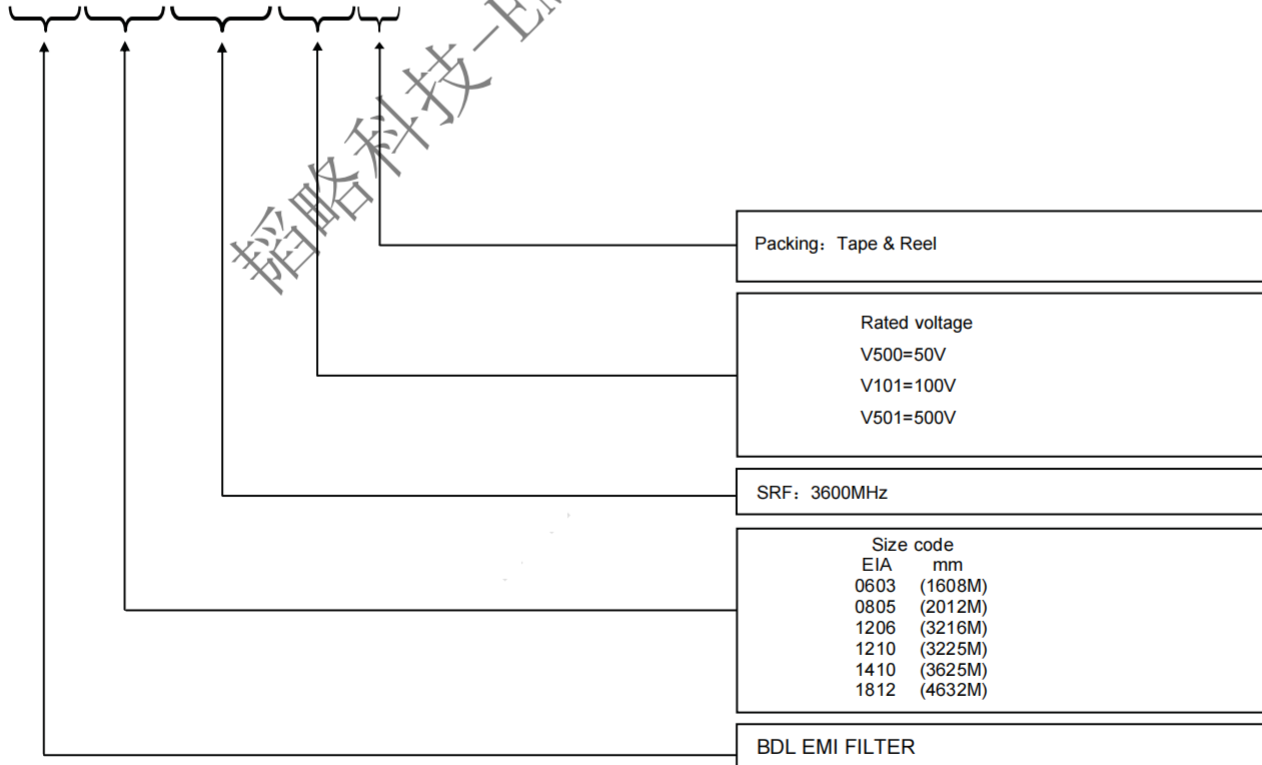

EMI FILTER INSERTION LOSS

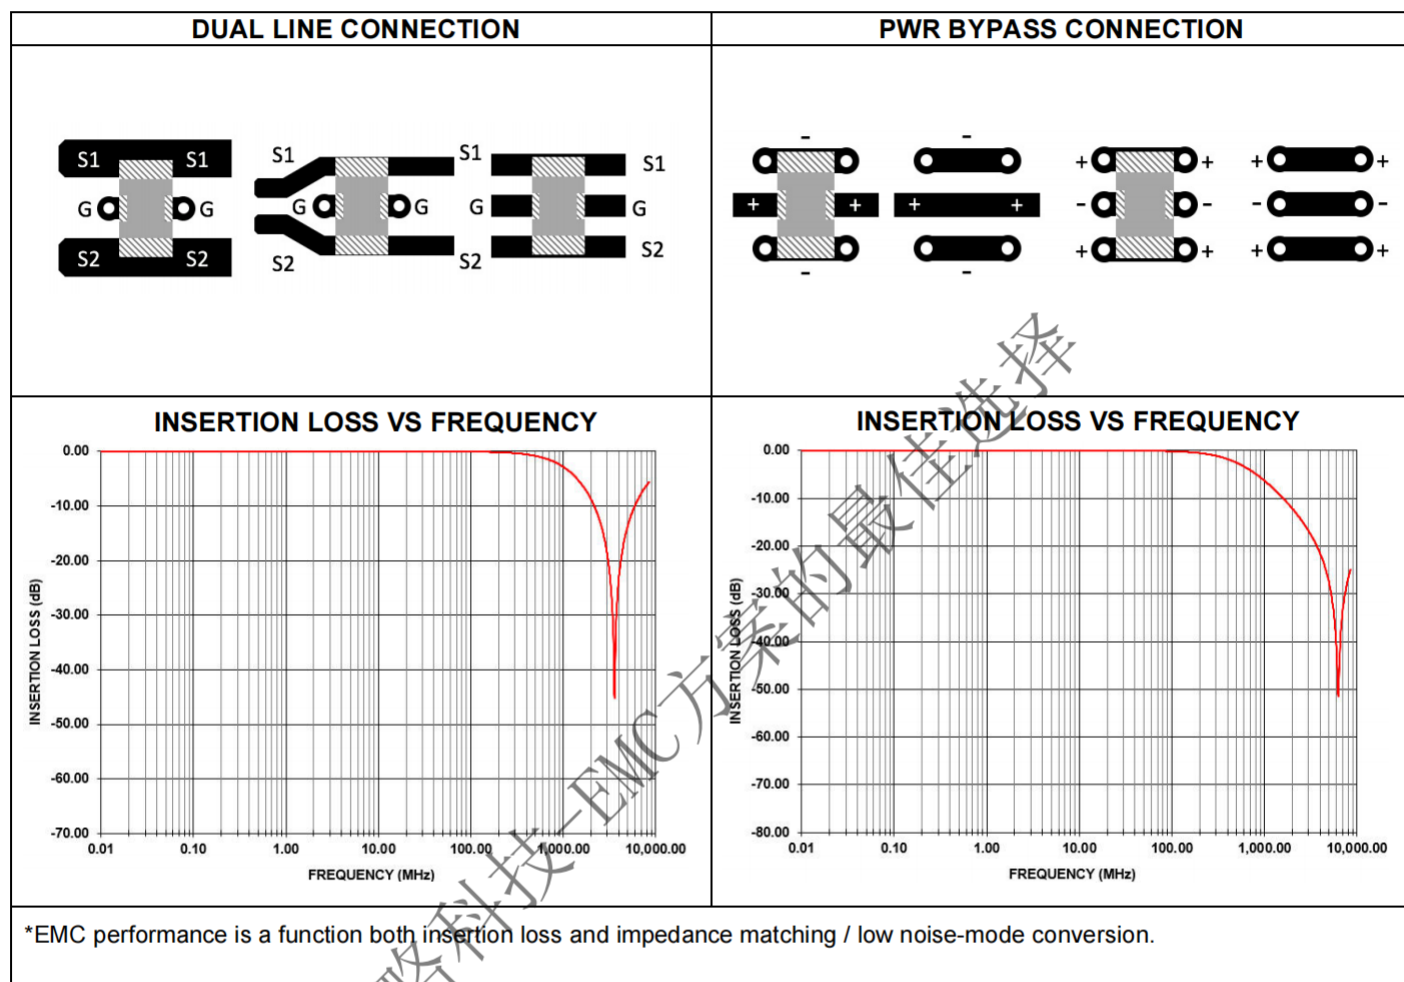


SIZE	IN	(mm)
L	.064 ± .005	1.626 ± .127
W	.035 ± .005	0.889 ± .127
T	.026 max.	.660 max.
EB	.010 ± .006	.254 ± .152
CB	.018 ± .004	.457 ± .102
WB	.005 ± .004	.127 ± .102

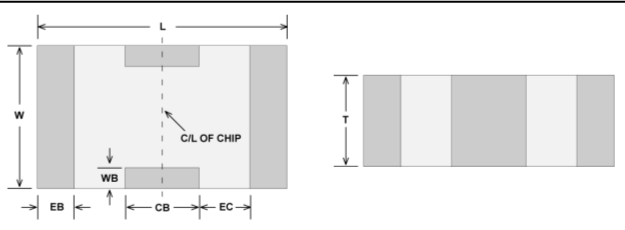

■ SOLDER PAD RECOMMENDATIONS:

SOLDER REFLOW		
	IN	mm
X	0.035	0.89
Y	0.025	0.64
G	0.040	1.02
V	0.020	0.51
U	0.060	1.52
Z	0.090	2.29

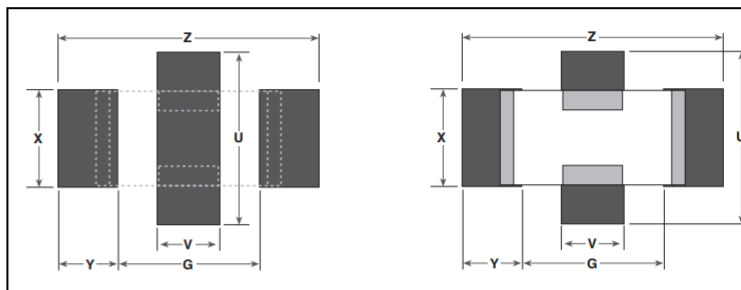

■ SOLDER PROCESS RECOMMENDATIONS:


SOLDER REFLOW:

Recommended temperature profiles for reflow soldering are shown in Table 1 and Figure 1 from J-STD-020C

Preheat ramp: 1-3°C/sec.

Preheat: 75-125°C < T (max)

T (max): 210-260°C

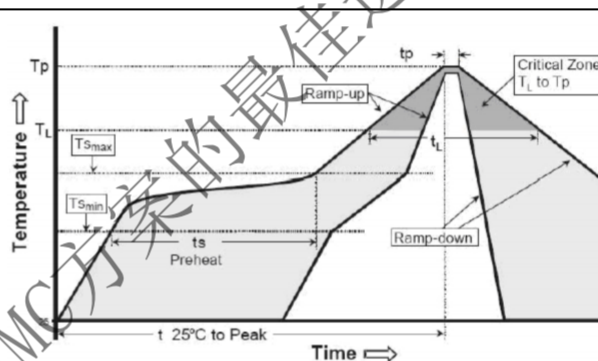


SOLDER WAVE: Caution, NOT recommended for sizes >1206

Preheat Temp.: 100-120°C

Δ T Pre-Heat: 150°C max.

Soldering Peak Temp.: 250-260°C, 5 SEC max.

Cool Down: <2°C/SEC

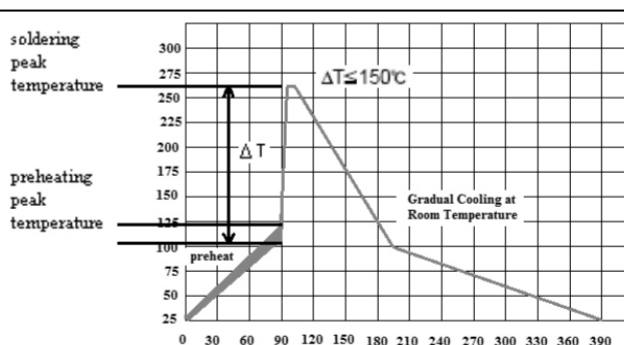

SOLDERING NOT SUPPORTED FOR USE IN MASS

Not recommended for lab proto-typing, use solder reflow, hot-air tool, or conductive epoxy to thermal damage and compromised test results. If Iron is used, follow below

- Preheat circuit and capacitors to within 100° C of soldering
- No contact of iron tip with
- 20 watt iron output
- 350° C tip temperature
- 1.0 mm tip diameter
- Limit soldering time to 3 sec.