


DS34C86 Quad CMOS Differential Line Receiver

Features

- Low power CMOS design $\pm 0.2V$ sensitivity over the entire common mode range
- Typical propagation delays: 20 ns
- Typical input hysteresis: 50 mV
- Inputs won't load line when $V_{cc} = 0V$
- Meets the requirements of EIA standard RS-422
- TRI-STATE outputs for connection to system buses

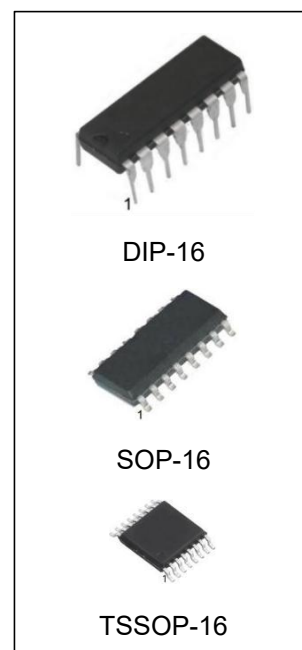

Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
DS34C86N	DIP-16	DS34C86	TUBE	1000pcs/box
DS34C86M/TR	SOP-16	DS34C86	REEL	2500pcs/reel
DS34C86MT/TR	TSSOP-16	34C86	REEL	2500pcs/reel


General Description

The DS34C86 is a quad differential line receiver designed to meet the RS-422, RS-423, and Federal Standards 1020 and 1030 for balanced and unbalanced digital data transmission, while retaining the low power characteristics of CMOS.


The DS34C86 has an input sensitivity of 200 mV over the common mode input voltage range of $\pm 7V$. Hysteresis is provided to improve noise margin and discourage output instability for slowly changing input waveforms.

Separate enable pins allow independent control of receiver pairs. The TRI-STATE[®] outputs have 6 mA source and sink capability. The DS34C86 is pin compatible with the DS3486.

Logic Diagram

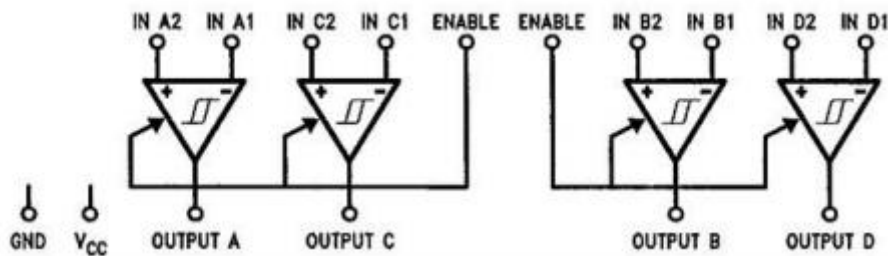

Connection Diagram

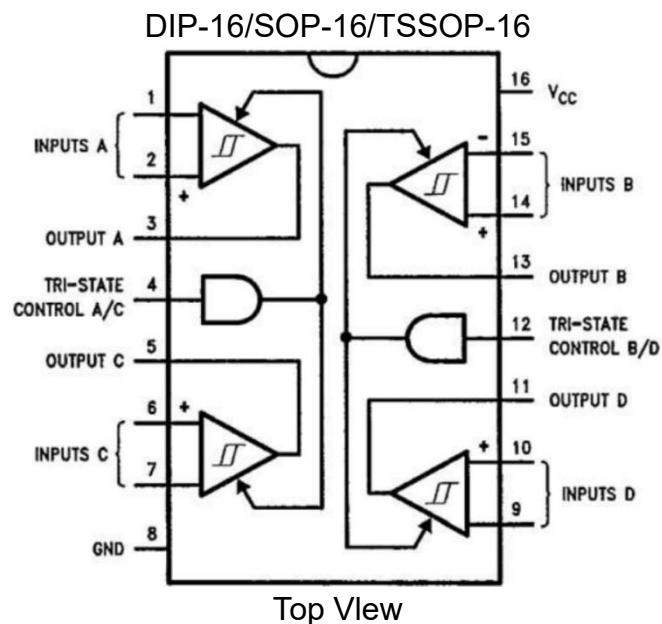

Absolute Maximum Ratings (Notes 1 & 2)

Condition	Min	Max	UNITS
Supply Voltage (V _{CC})	-	7	V
Common Mode Range (V _{CM})	-14	+14	V
Differential Input Voltage (V _{DIFF})	-14	+14	V
Enable Input Voltage (V _{IN})	-	7	V
Storage Temperature Range (T _{STG})	-65	+150	°C
Lead Temperature (Soldering 10 sec)	-	260	°C
Current Per Output	-25	+25	mA
Operating Conditions			
Supply Voltage (V _{CC})	4.75	5.25	V
Operating Temperature Range (T _A)	-40	+85	°C
Enable Input Rise or Fall Times	-	500	ns

DC Electrical Characteristics

V_{CC} = 5V +5% (unless otherwise specified) (Note 3)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V _{TH}	Minimum Differential Input Voltage	V _{OUT} = V _{OH} or V _{OL} -7V < V _{CM} < +7V	-0.2		+0.2	V
R _{IN}	Input Resistance	-7V < V _{CM} < +7V (One Input AC GND)		10		kΩ
I _{IN}	Input Current (Under Test)	V _{IN} = +10V, Other Input GND V _{IN} = -10V, Other Input = GND		+1.1 -1.6		mA mA
V _{OH}	Minimum High Level Output Voltage	V _{CC} =Min, V _(DIFF) =+1V I _{OUT} =6.0mA	3.84	4.2		V
V _{OL}	Maximum Low Level Output Voltage	V _{CC} =Max, V _(DIFF) =+1V I _{OUT} =6.0mA				V
V _{IH}	Minimum Enable High Input Level Voltage		2.0			V
V _{IL}	Maximum Enable Low Input Level Voltage				0.8	V
I _{OZ}	Maximum TRI-STATE Output Leakage Current	V _{OUT} =V _{CC} or GND, TRI-STATE Control=VIL		±0.5	±5.0	μA
I _I	Maximum Enable Input Current	V _{IN} =V _{CC} or GND			±1.0	μA
I _{CC}	Quiescent Power Supply Current	V _{CC} =Max, V _(DIFF) =+1V		12		mA
V _{HYST}	Input Hysteresis			50		mV

AC Electrical Characteristics

$V_{CC} = 5V \pm 5\%$ (unless otherwise specified) (Note 3)


Symbol	Parameter	Conditions	Min	Typ	Max	Units
T_{PLH} , t_{PHL}	Propagation Delay Input to Output	$C_L = 50pF$ $V_{DIFF} = 2.5V$		20		ns
t_{PLZ} , t_{PHZ}	Propagation Delay TRI-STATE Control to Output	$C_L = 50pF$ $R_L = 1000\Omega$ $V_{DIFF} = 2.5V$		12		ns
t_{PZL} , t_{PZH}	Propagation Delay TRI-STATE Control to Output	$C_L = 50pF$ $R_L = 1000\Omega$ $V_{DIFF} = 2.5V$		14		ns

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured.


Note 2: Unless otherwise specified, all voltages are referenced to ground.

Note 3: Unless otherwise specified, Min/Max limits apply across the $-40^{\circ}C$ to $+65^{\circ}C$ temperature range. All typicals are given for $V_{CC} = 5V$ and $T_A = 25^{\circ}C$.

Propagation Delay

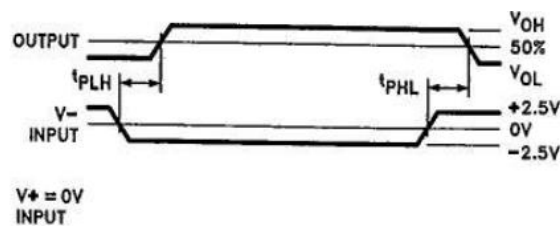

Test Circuit for TRI-STATE Output Tests

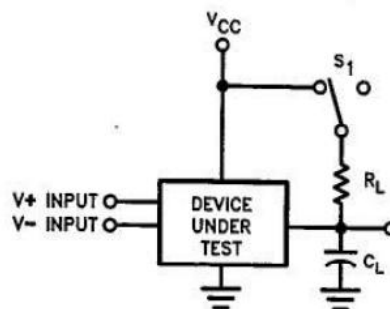


C_L = Includes load and test jig capacitance.

$S_1 = V_{CC}$ for t_{pzu} , and t_{pLz} measurements.


$S_1 = GND$ for t_{pZu} , and t_{pHz} measurements.

TRI-STATE Output Enable and Disable Waveforms

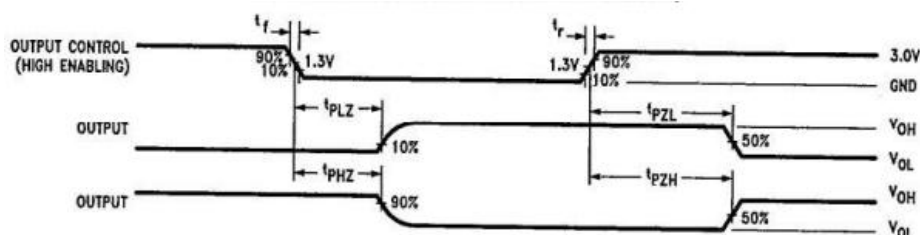


Physical Dimensions

DIP-16

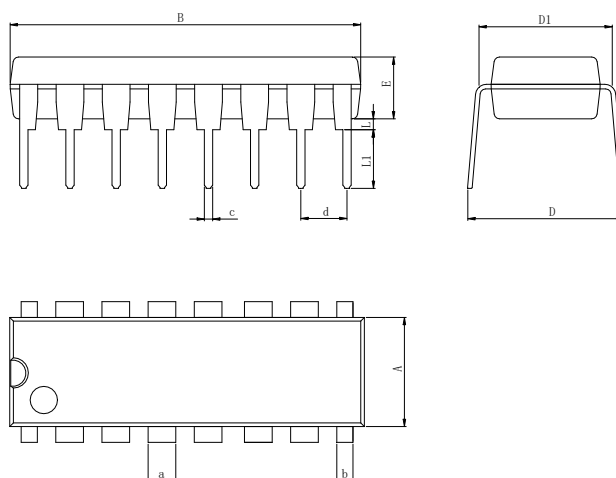

Dimensions In Millimeters(DIP-16)											
Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	18.94	8.10	7.42	3.10	0.50	300	1.50	0.85	0.40	2.54 BSC
Max:	6.68	19.56	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	


SOP-16

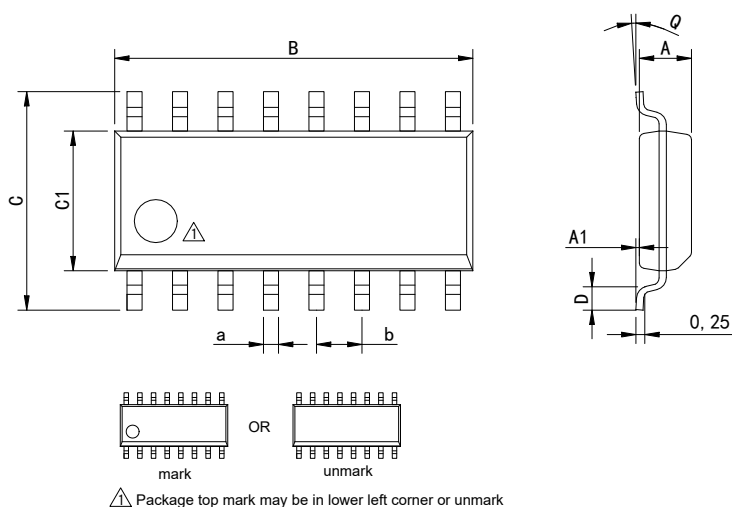

Dimensions In Millimeters(SOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	9.80	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	10.0	6.20	4.00	0.80	8°	0.45	

Physical Dimensions

TSSOP-16

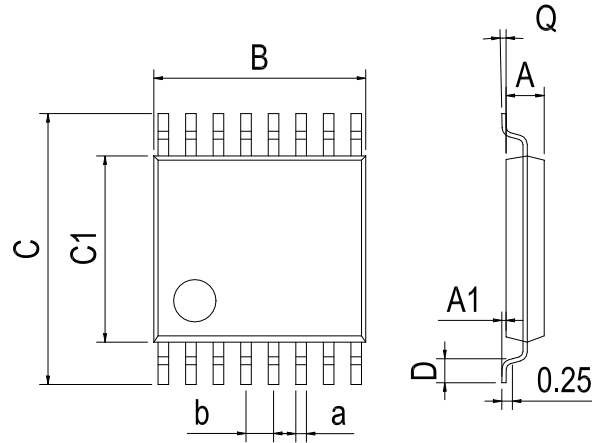

Dimensions In Millimeters(TSSOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.85	0.05	4.90	6.20	4.30	0.40	0°	0.20	0.65 BSC
Max:	0.95	0.20	5.10	6.60	4.50	0.80	8°	0.25	

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2014-6	New	1-8
V1.1	2019-9	Modify the package dimension diagram TSSOP-16Updated DIP-16 dimension	5、 6
V1.2	2024-11	Update Lead Temperature	3
V1.3	2025-11	Update important statements、 Update SOP-16 Dimension drawing	5、 8

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.