

MHC25X02

2dB 90° Directional Coupler



MECSINE 兆讯

Applications

- 1, Low Insertion Loss For Power Combining
- 2, Doherty Power Amplifier
- 3, Small Cell & Pico

Features

- 1, Low Insertion Loss
- 2, High Isolation, 25 dB typ.
- 3, Excellent high-power capacity up to 30W
- 4, RoHS compliance (Pb-Free)
- 5, AEC-Q200 qualified

Description

The MHC25X02 is a low cost, high performance 2 dB hybrid coupler in an easy used surface mount package. The MHC25X02 is ideal for doherty power amplifier, circular polarized antenna and other applications where low insertion loss and tight amplitude and phase balance are required. MHC25X02 is constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability. All components are 100% RF tested.

Characteristics


Table 1. MHC25X02 Characteristics

Item	Min.	Type	Max.	Unit
Frequency Range	2300		2700	MHz
Isolation	20	22		dB
Insertion Loss		0.2	0.35	dB
Phase Unbalance	-3		+3	degrees
Directivity		22		dB
Return Loss		-25		dB
Operating Temp.	-55		+125	°C
Power			30	W

All the above data are based on specified demo board and tested in 25° environment.

Port Configuration

Figure 1. MHC25X02 (Top View)

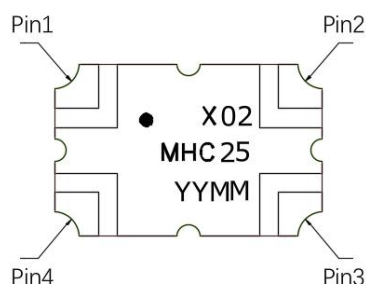

All Use For RF & Microwave

MHC25X02

2dB 90° Directional Coupler



MECSINE 兆讯


The MHC25X02 port configurations depending on how input signals are split. The Case 1, Case 2, Case 3, and Case 4, configurations mean that one input signal is split into two output signals. When port 1 is defined, the other ports are defined automatically

Table 2. MHC25X02 Port Configurations

Configuration	Port 1	Port 2	Port 3	Port 4
Case1.	Input	Isolated	Direct -5dB, -90°	Coupling -2dB, 0°
Case2.	Isolated	Input	Coupling -2dB, 0°	Direct -5dB, -90°
Case3.	Direct -5dB, -90°	Coupling -2dB, 0°	Input	Isolated
Case4.	Coupling -2dB, 0°	Direct -5dB, -90°	Isolated	Input

Outline Drawing

Figure 2. MHC25X02 Outline Drawing

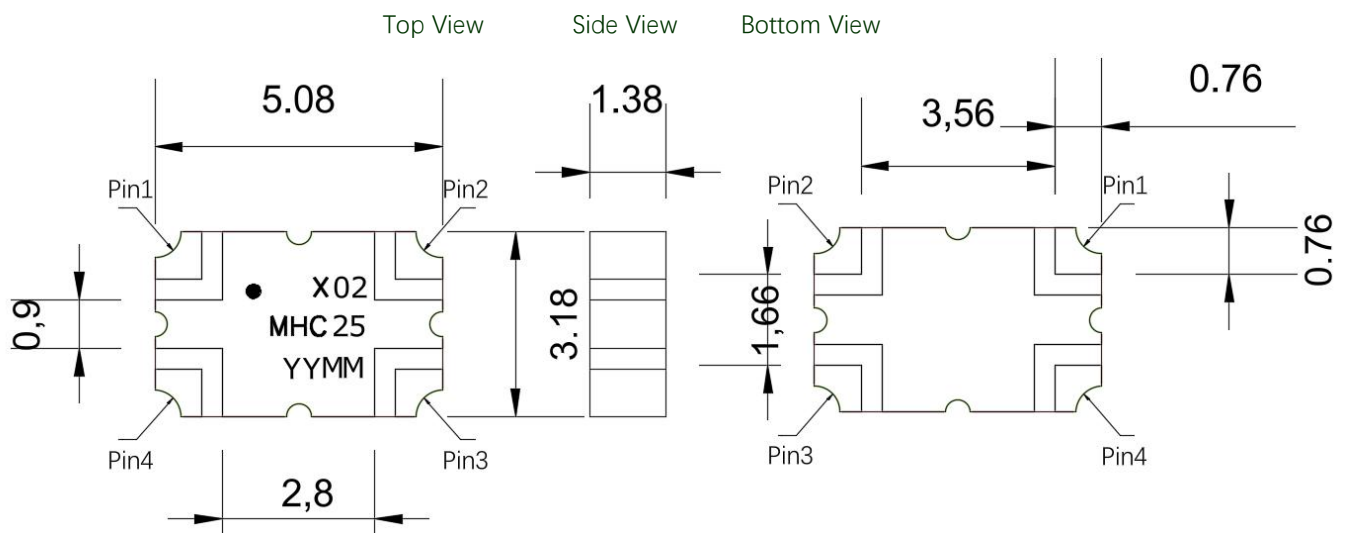

Unit: mm

Typical Performance (N=25°C, 2300-2700 MHz)

Figure 3. MHC25X02 Coupling


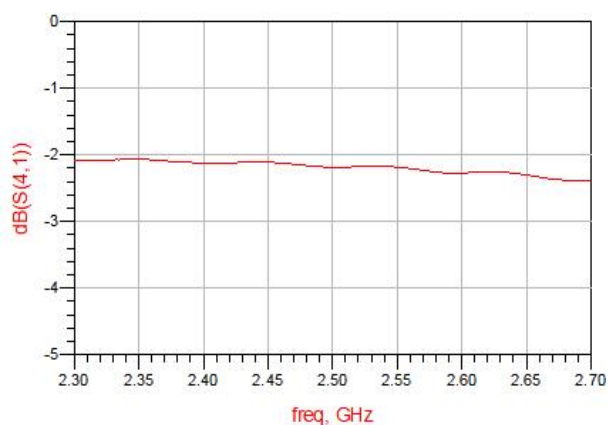


Figure 4. MHC25X02 Transmission

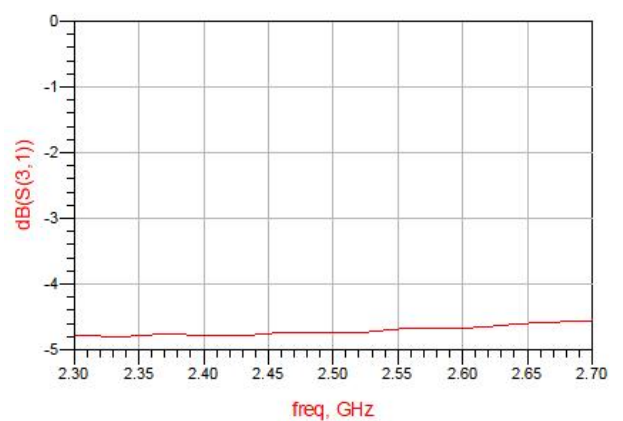

All Use For RF & Microwave

MHC25X02

2dB 90° Directional Coupler

MiPD®

MECSINE 兆讯

Figure 5. MHC25X02 Return Loss (S11)

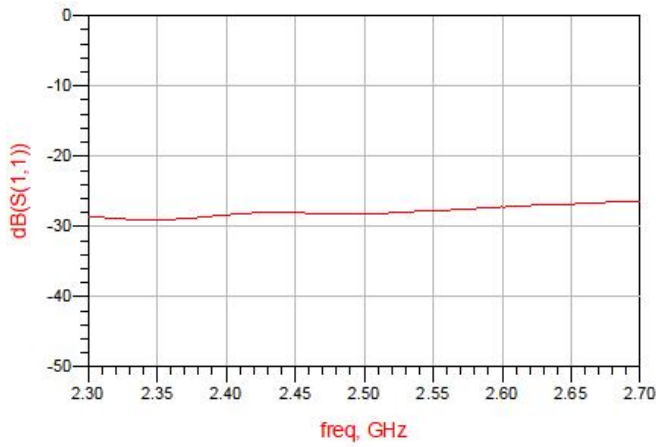


Figure 6. MHC25X02 Return Loss (S22)

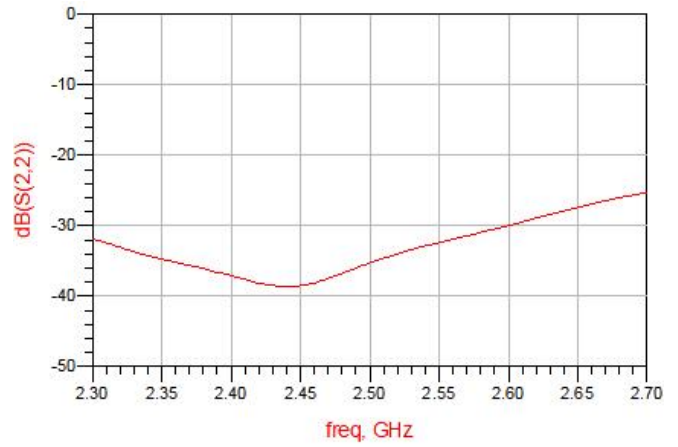


Figure 7. MHC25X02 Return Loss (S33)

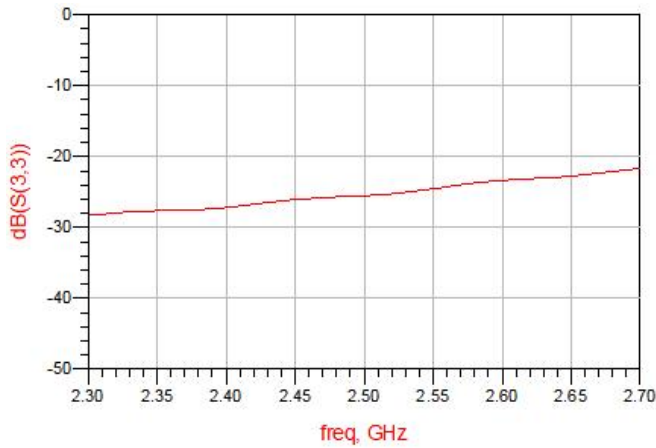


Figure 8. MHC25X02 Return Loss (S44)

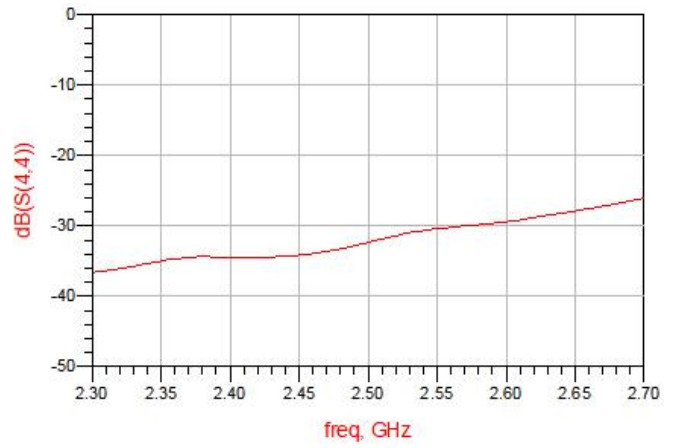


Figure 9. MHC25X02 Isolation


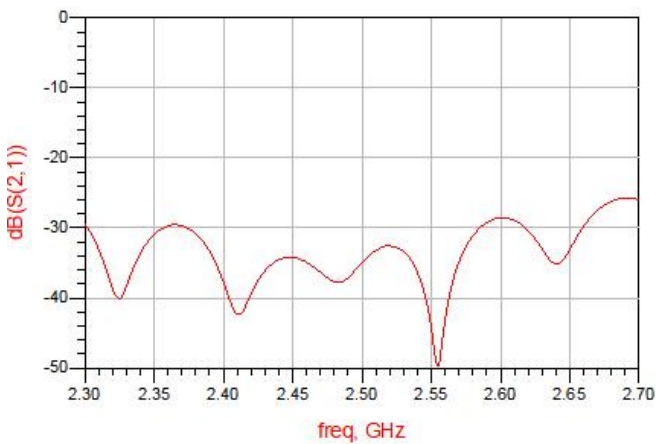


Figure 10. MHC25X02 Phase

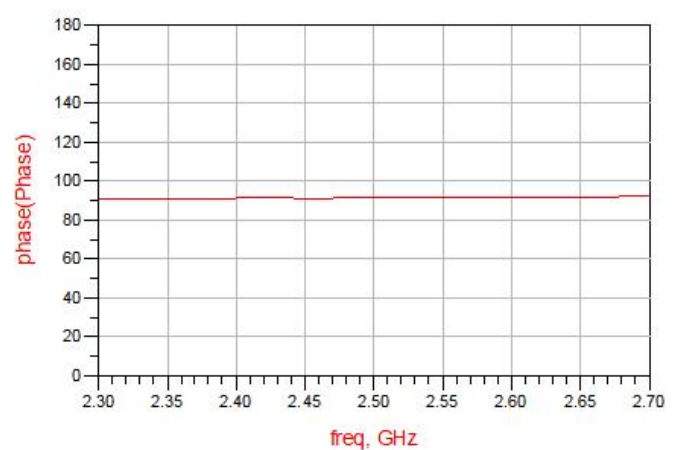

All Use For RF & Microwave

MHC25X02

2dB 90° Directional Coupler



MECSINE 兆讯

Figure 11. MHC25X02 IL


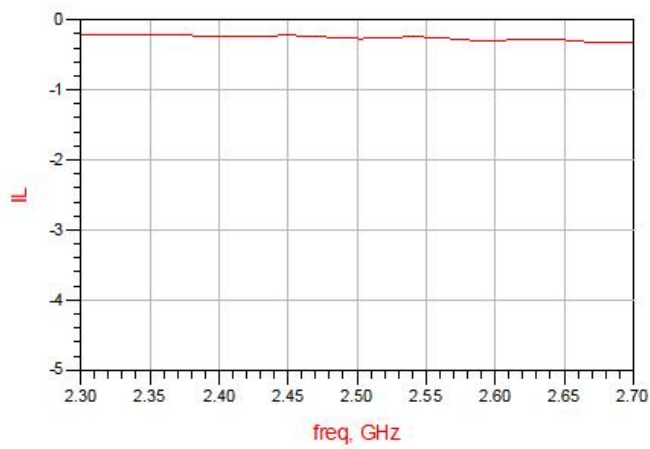


Figure 12. MHC25X02 Directivity

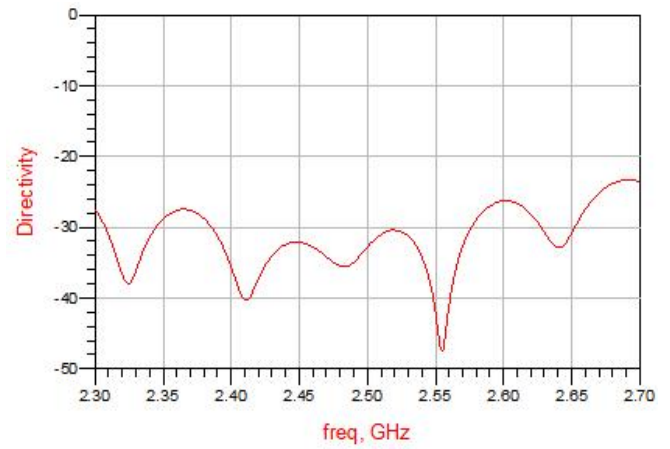

All Use For RF & Microwave


Definition of Measured Specifications

Table 3. Mathematical Formula for the MHC25X02 Parameters

Parameter	Definition	Mathematical Representation
VSWR (Voltage Standing Wave Ratio)	The impedance match of the coupler to a 50W system. A VSWR of 1:1 is optimal.	$VSWR = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave
Return Loss	The impedance match of the coupler to a 50W system. Return Loss is an alternate means to express VSWR.	$\text{Return Loss (dB)} = 20 \log \frac{VSWR+1}{VSWR-1}$
Insertion Loss	The input power divided by the sum of the power at the two output ports.	$\text{Insertion Loss(dB)} = 10 \log \frac{P_{in}}{P_{cp1} + P_{transmission}}$
Isolation	The input power divided by the power at the isolated port.	$\text{Isolation(dB)} = 10 \log \frac{P_{in}}{P_{iso}}$
Phase Balance	The difference in phase angle between the two output ports.	Phase at coupled port – Phase at transmission port
Amplitude Balance	The power at each output divided by the average power of the two outputs.	$10 \log \frac{P_{cp1}}{P_{cp1} + P_{transmission}} \text{ and } 10 \log \frac{P_{transmission}}{P_{cp1} + P_{transmission}}$

Recommended PCB Layout

Figure 13. Recommended PCB Layout

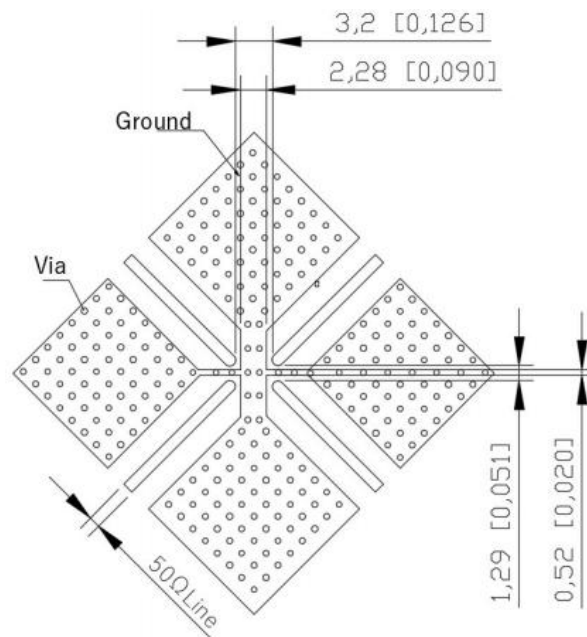

50Ω Line mm/inch

All Use For RF & Microwave


MHC25X02

2dB 90° Directional Coupler



Reflow Profile

Figure 14. MHC25X02 Thermal Reflow Profile

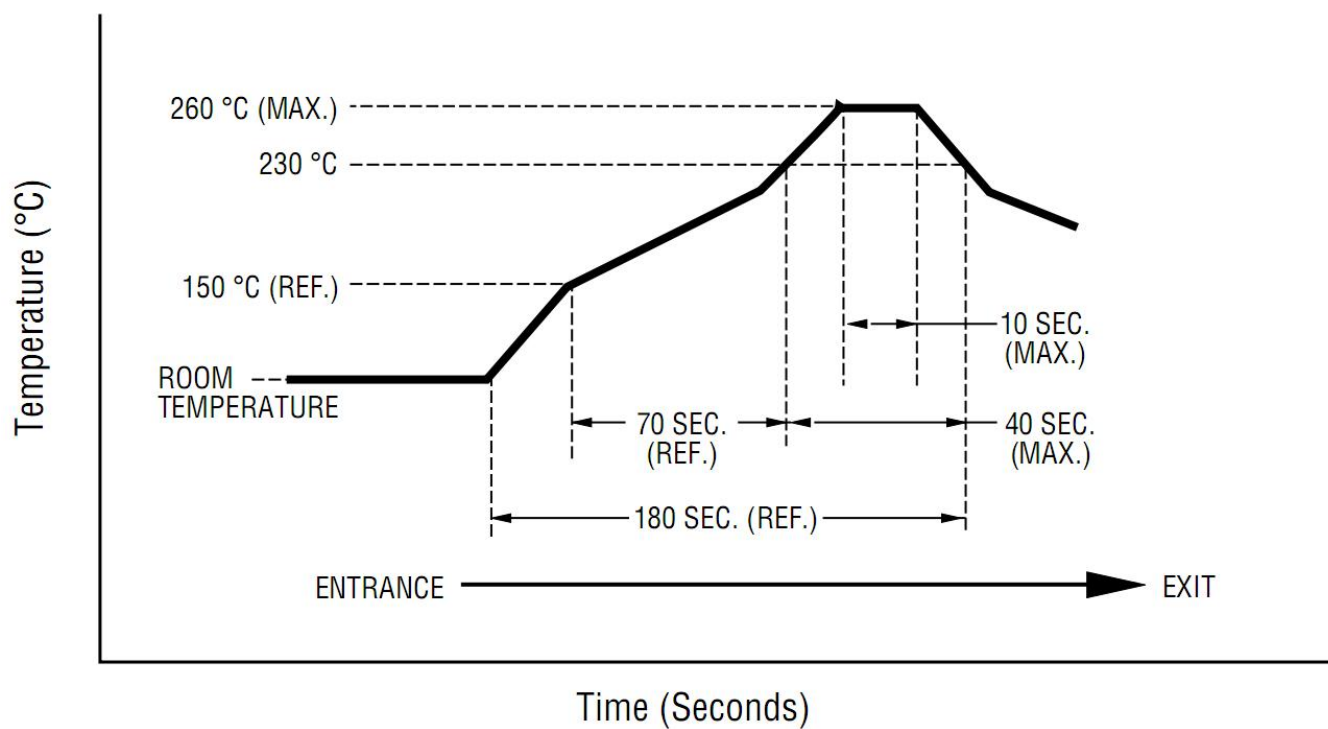

Packaging and Ordering Information

Table 4. MHC25X02 Ordering Information

Device	Package	Reel	Shipping
MHC25X02	5.08*3.18mm	7"	1000 Reel

All Use For RF & Microwave

MHC25X02

2dB 90° Directional Coupler



Revision	Description	Date
Rev0	Preliminary	2023/5/29
Rev1	Update	2026/2/3

All Use For RF & Microwave