

MHC0627L03

3dB 90° Hybrid Coupler



MEGSINE 兆讯

Applications

- 1, Low Insertion Loss For Power Combining
- 2, Doherty Power Amplifier
- 3, Small Cell & Pico
- 4, GNSS Antenna



Features

- 1, Low Insertion Loss
- 2, High Isolation, 20 dB typ.
- 3, Excellent high-power capacity up to 100W
- 4, RoHS compliance (Pb-Free)

Description

The MHC0627L03 is a low cost, high performance 3 dB hybrid coupler in an easy used surface mount package. The MHC0627L03 is ideal for doherty power amplifier, circular polarized antenna and other applications where low insertion loss and tight amplitude and phase balance are required. MHC0627L03 is constructed from ceramic filled PTFE composites which possess excellent electrical and mechanical stability. All components are 100% RF tested.

Characteristics

Table 1. MHC0627L03 Characteristics


Item	Min.	Type	Max.	Unit
Frequency Range	600		2700	MHz
Isolation	18	20		dB
Insertion Loss	0.17	0.6	0.7	dB
Phase Unbalance	-8		+8	degrees
Amplitude	-1		+1	dB
Return Loss	15	20		dB
Operating Temp.	-55		+85	°C
Power			100	W

All the above data are based on specified demo board and tested in 25° environment.

This device is capable of handling 100 Watts CW of incident power at a temperature of 25°C for 10 minutes.

Port Configuration

Figure 1. MHC0627L03 (Bottom View)



All Use For RF & Microwave

MHC0627L03

3dB 90° Hybrid Coupler



MEGSINE 兆讯


The MHC0627L03 port configurations depending on how input signals are split. The Case 1, Case 2, Case 3, and Case 4, configurations mean that one input signal is split into two output signals. When port 1 is defined, the other ports are defined automatically

Table 2. MHC0627L03 Port Configurations

Configuration	Port 1	Port 2	Port 3	Port 4
Case1.	Input	Isolated	Direct -3dB, -90°	Coupling -3dB, 0°
Case2.	Isolated	Input	Coupling -3dB, 0°	Direct -3dB, -90°
Case3.	Direct -3dB, -90°	Coupling -3dB, 0°	Input	Isolated
Case4.	Coupling -3dB, 0°	Direct -3dB, -90°	Isolated	Input

Outline Drawing

Figure 2. MHC0627L03 Outline Drawing

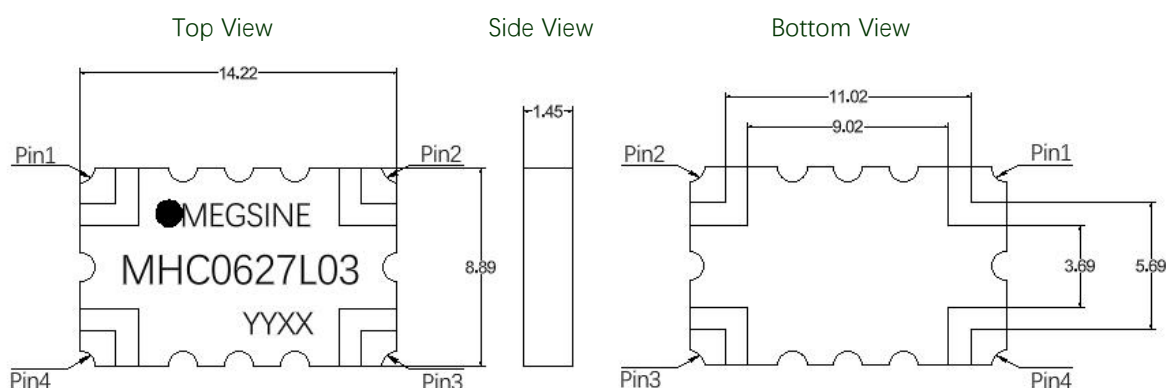

Unit: mm

Typical Performance (25°C, 600-2700 MHz)

Figure 3. MHC0627L03 Coupling


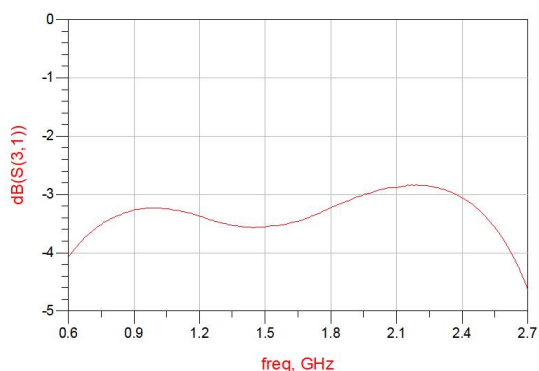


Figure 4. MHC0627L03 Transmission

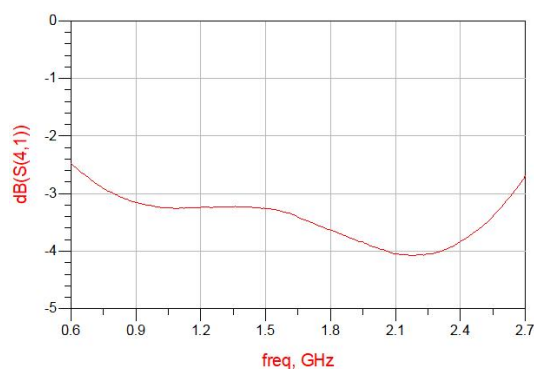

All Use For RF & Microwave

MHC0627L03

3dB 90° Hybrid Coupler



MECSINE 兆讯

Figure 5. MHC0627L03 Return Loss (S11)

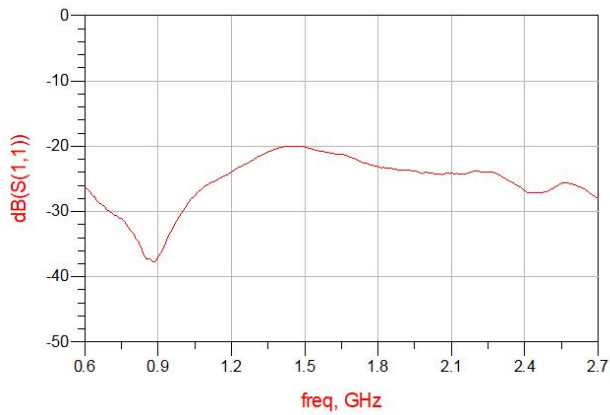


Figure 6. MHC0627L03 Return Loss (S22)

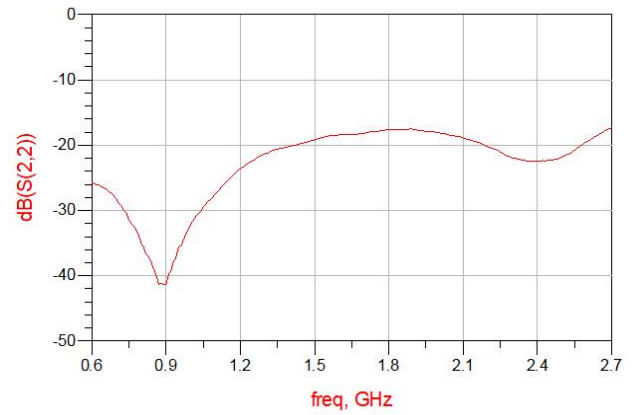


Figure 7. MHC0627L03 Return Loss (S33)

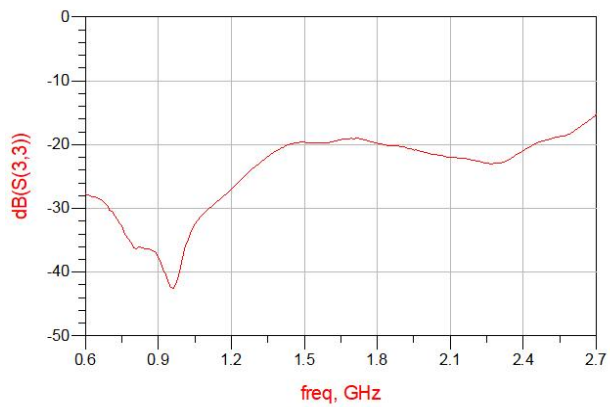


Figure 8. MHC0627L03 Return Loss (S44)

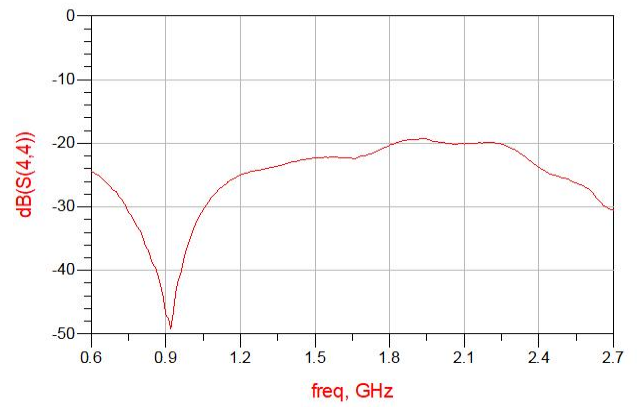


Figure 9. MHC0627L03 Isolation


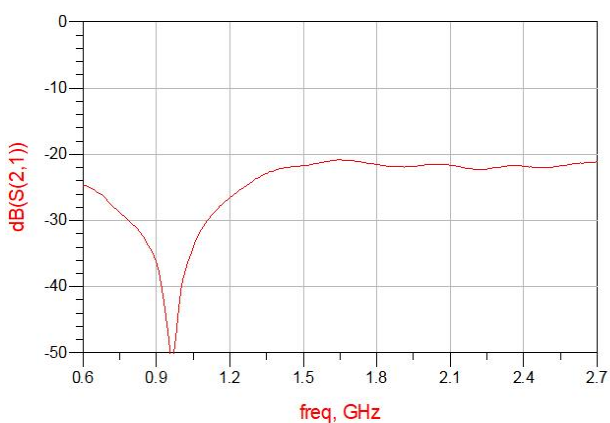


Figure 10. MHC0627L03 Phase

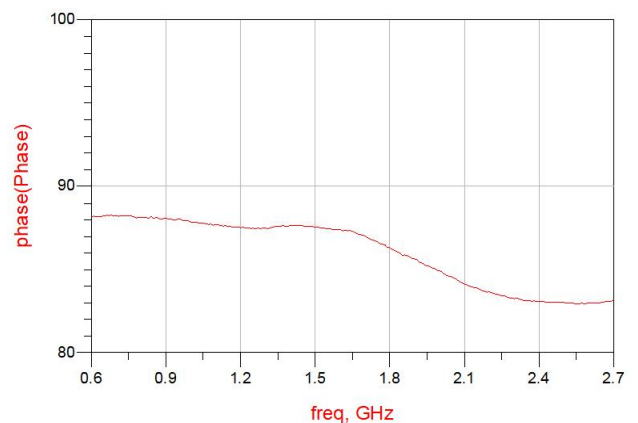

All Use For RF & Microwave


MHC0627L03

3dB 90° Hybrid Coupler



MECSINE 兆讯

Figure 11. MHC0627L03 IL

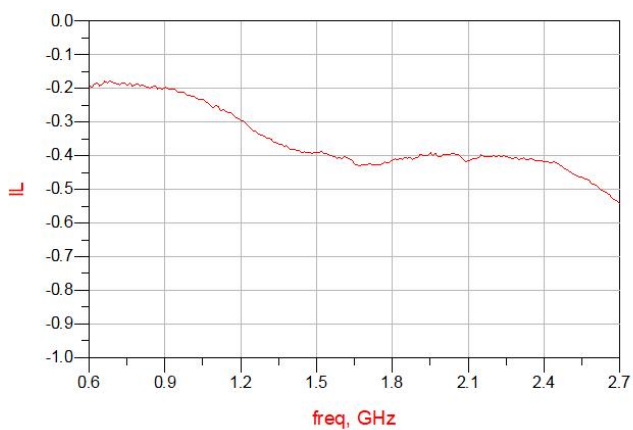

All Use For RF & Microwave

MHC0627L03

3dB 90° Hybrid Coupler




Definition of Measured Specifications

Table 3. Mathematical Formula for the MHC0627L03 Parameters

Parameter	Definition	Mathematical Representation
VSWR (Voltage Standing Wave Ratio)	The impedance match of the coupler to a 50W system. A VSWR of 1:1 is optimal.	$VSWR = \frac{V_{max}}{V_{min}}$ Vmax = voltage maxima of a standing wave Vmin = voltage minima of a standing wave
Return Loss	The impedance match of the coupler to a 50W system. Return Loss is an alternate means to express VSWR.	$\text{Return Loss (dB)} = 20 \log \frac{VSWR+1}{VSWR-1}$
Insertion Loss	The input power divided by the sum of the power at the two output ports.	$\text{Insertion Loss(dB)} = 10 \log \frac{P_{in}}{P_{cp1} + P_{transmission}}$
Isolation	The input power divided by the power at the isolated port.	$\text{Isolation(dB)} = 10 \log \frac{P_{in}}{P_{iso}}$
Phase Balance	The difference in phase angle between the two output ports.	Phase at coupled port – Phase at transmission port
Amplitude Balance	The power at each output divided by the average power of the two outputs.	$10 \log \frac{P_{cp1}}{\frac{P_{cp1} + P_{transmission}}{2}} \text{ and } 10 \log \frac{P_{transmission}}{\frac{P_{cp1} + P_{transmission}}{2}}$

Recommended PCB Layout

Figure 12. Recommended PCB Layout

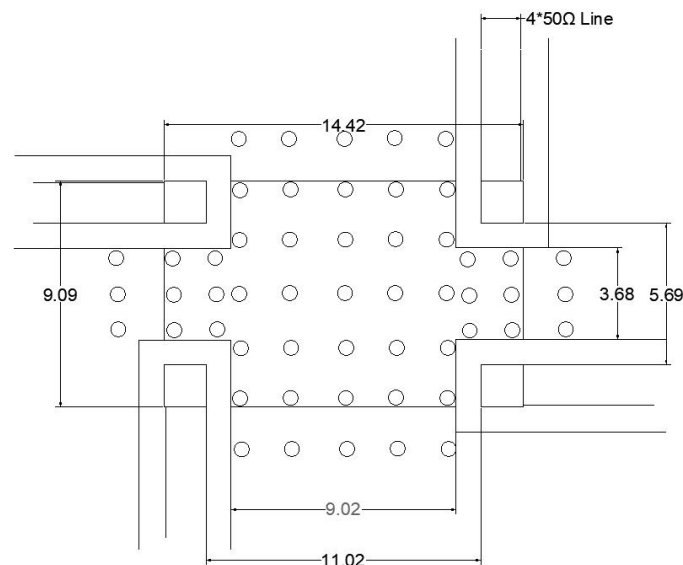

50Ω Line mm/inch

All Use For RF & Microwave


MHC0627L03

3dB 90° Hybrid Coupler



Reflow Profile

Figure 13. MHC0627L03 Thermal Reflow Profile

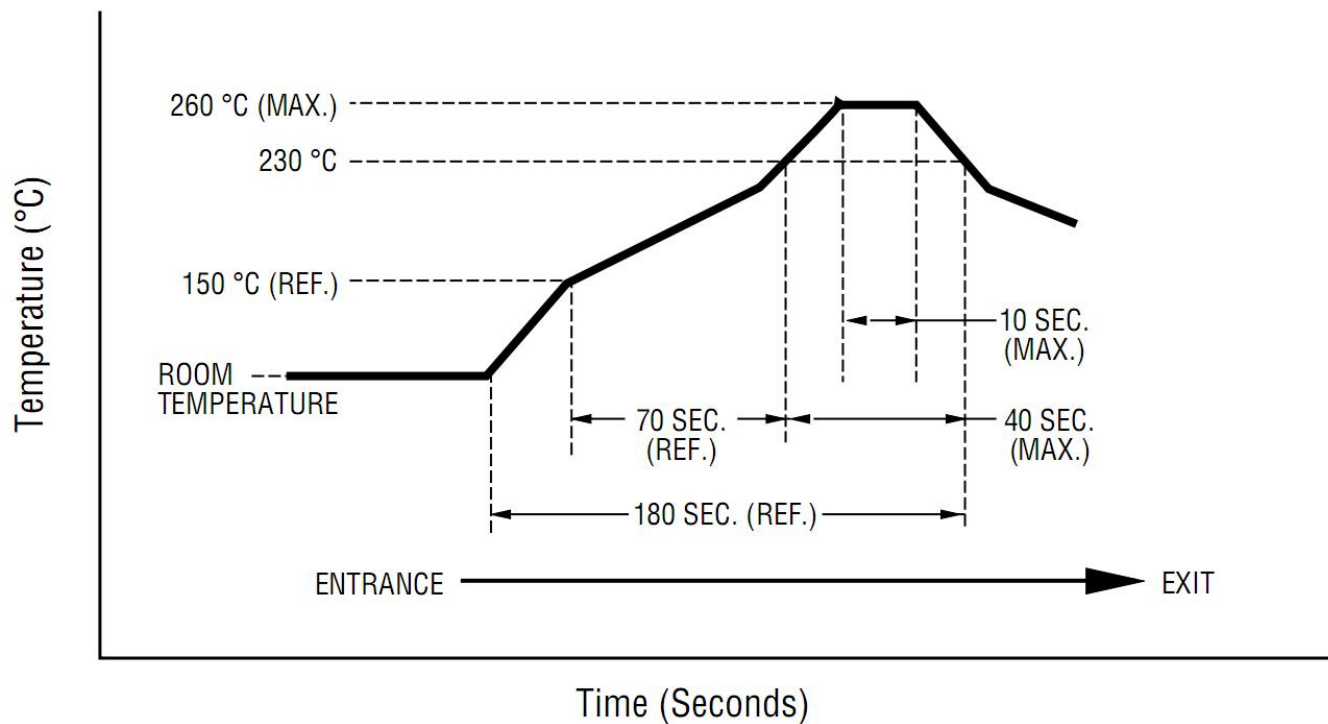

Packaging and Ordering Information

Table 4. MHC0627L03 Ordering Information

Device	Package	Reel	Shipping
MHC0627L03	14.22*8.89mm	7"	2000 Reel

All Use For RF & Microwave

MHC0627L03

3dB 90° Hybrid Coupler



Revision	Description	Date
Rev0	Preliminary	2024/2/26
Rev1	Update	2026/7/02

All Use For RF & Microwave