
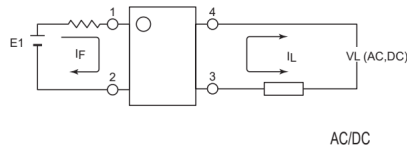


| Parameter             | Symbol    | Rating | Units    |
|-----------------------|-----------|--------|----------|
| Load Voltage          | $V_L$     | 60     | V        |
| Load Current          | $I_L$     | 2.0    | A        |
| On-Resistance         | $R_{on}$  | 0.058  | $\Omega$ |
| Output Capacitance    | $C_{out}$ | 115    | pF       |
| I/O Breakdown Voltage | $V_{ISO}$ | 5000   | Vrms     |

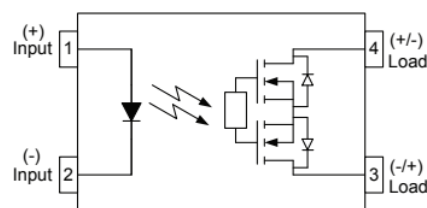

(Unit: mm) 7.62\*6.4\*3.2


**SMD-4**

**DIP-4**


## PhotoRelays

Photorelays are the most reliable, technically advanced logic-to-power interface devices. Their basic function is to take a low current signal from a microprocessor to control the switching of both AC and DC loads, while providing an isolation barrier between logic and power. While this function is common to all relays, Photorelays provide distinct advantages over their mechanical counterparts including:

- Long life (No limit on mechanical and electrical lifetime)
- Bounce-free switching
- Higher speed and high frequency switching
- Higher sensitivity (less power consumption)
- Immunity to EMI or RFI
- No arcing switch, bounce, and noise
- More resistant to vibration and impact
- AC or DC load switching
- Small package size

## Function

PhotoRelays operate by taking a low level input current (<5mA) that energizes an input Infrared LED, which is optically-coupled to a Photo-diode array chip. This IC in turn generates a photo voltage that powers two MOSFETs typically connected in a source-to-source configuration, allowing for both AC and DC output loads. Photorelay basically move photons to accomplish their switching function, they incur no mechanical wear and tear, providing consistent reliable switching.

## Applications

These advantages make Photorelays the ideal choice for:

- Telecom/Datacom switching
- Multiplexers
- Meter reading systems
- Data acquisition
- Test & Measurement equipment
- Battery monitoring
- I/O Sub-Systems
- Robotics
- Automatic Test Equipment
- Home/Safety security systems
- Process Control
- Energy Management
- Reed Relay EMR Replacement
- Programmable Controllers

## TYPES

| Category | Output Rating |              | Package | Part No.   | Packing Quantity |
|----------|---------------|--------------|---------|------------|------------------|
|          | Load Voltage  | Load Current |         |            |                  |
| AC/DC    | 60V           | 2.0A         | DIP-4   | APY272G2E  | 100pcs/tube      |
|          |               |              | SMD-4   | APY272G2EH | 2000pcs/1reel    |

**Absolute Maximum Ratings** (Ta = 25°C)

| Item   |                           | Symbol     | Value       | Units            | Note             |
|--------|---------------------------|------------|-------------|------------------|------------------|
| Input  | Continuous LED Current    | $I_F$      | 50          | mA               |                  |
|        | Peak LED Current          | $I_{FP}$   | 1000        | mA               | f=100Hz, duty=1% |
|        | LED Reverse Voltage       | $V_R$      | 5           | V                |                  |
|        | Input Power Dissipation   | $P_{In}$   | 75          | mW               |                  |
| Output | Load Voltage              | $V_L$      | 60          | V(AC peak or DC) |                  |
|        | Load Current              | $I_L$      | 2.0         | A                |                  |
|        | Peak Load Current         | $I_{Peak}$ | 4.5         | A                | 100ms (1 pulse)  |
|        | Output Power Dissipation  | $P_{out}$  | 500         | mW               |                  |
|        | Total Power Dissipation   | $P_T$      | 650         | mW               |                  |
|        | I/O Breakdown Voltage     | $V_{I/O}$  | 5000        | Vrms             | RH=60%, 1min     |
|        | Operating Temperature     | $T_{opr}$  | -40 to +85  | °C               |                  |
|        | Storage Temperature       | $T_{stg}$  | -40 to +100 | °C               |                  |
|        | Pin Soldering Temperature | $T_{sol}$  | 260         | °C               | 10 sec max.      |


**Electrical Characteristics** (Ta = 25°C)

| Item    |                       | Symbol      | MIN. | TYP. | MAX. | Units | Conditions |
|---------|-----------------------|-------------|------|------|------|-------|------------|
| Input * | LED Forward Voltage   | $V_F$       | 1.24 | 1.3  | 1.4  | V     | $I_F=10mA$ |
|         | Operation LED Current | $I_{Fon}$   |      | 0.5  | 5.0  | mA    |            |
|         | Input Current (ON)    | $I_{F(ON)}$ |      | 6.0  | 30.0 | mA    |            |
|         | Recovery LED Current  | $I_{Foff}$  |      | 0.35 | 0.5  | mA    |            |
|         | Recovery LED Voltage  | $V_{Foff}$  | 0.7  |      |      | V     |            |

\* The threshold for device switching is  $I_F \geq 5.0 \text{ mA (MAX.)}$ ; however, to ensure satisfactory performance of the device across the temperature range, taking into account both circuit loss and interference, it is recommended to operate when the working condition is:  $I_F$  (input current)  $\geq 5 \text{ mA}$  and  $\leq 30mA$

| Item           |                           | Symbol     | MIN. | TYP.  | MAX. | Units    | Conditions                                              |
|----------------|---------------------------|------------|------|-------|------|----------|---------------------------------------------------------|
| Output         | On-Resistance             | $R_{on}$   |      | 0.058 | 0.15 | $\Omega$ | $I_F=5mA, I_L=100mA$ ,<br>Time to flow is within 1 sec. |
|                | Off-State Leakage Current | $I_{Leak}$ |      |       | 1.0  | $\mu A$  | $V_L=Rating$                                            |
|                | Output Capacitance        | $C_{out}$  |      | 115   |      | pF       | $V_L=0, f=1MHz$                                         |
| Transmission * | Turn-On Time              | $T_{on}$   |      | 1.4   | 2.0  | ms       | $I_F=5mA, I_L=100mA$ ,                                  |
|                | Turn-On Time              | $T_{on}$   |      | 1.0   | 1.6  | ms       | $I_F=10mA, I_L=100mA$ ,                                 |
|                | Turn-Off Time             | $T_{off}$  |      | 0.08  | 0.2  | ms       | $I_F=5mA, I_L=100mA$ ,                                  |
| Coupled        | I/O Isolation Resistance  | $R_{I/O}$  | 5    |       |      | $\Omega$ | DC500V                                                  |
|                | I/O Capacitance           | $C_{I/O}$  |      | 0.8   | 1.5  | pF       | f=1MHz                                                  |


\*Turn on/Turn off time

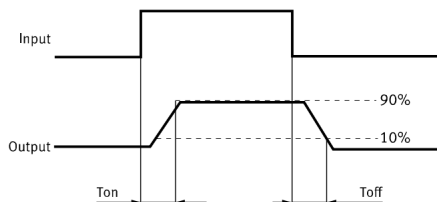




## Using Methods

Examples of resistance value to control LED forward current ( $I_F=5\text{mA}$ )



| E1   | R1 (Approx)  |
|------|--------------|
| 3.3V | 300 $\Omega$ |
| 5.0V | 600 $\Omega$ |

LED forward current must be more than 5mA , at  $I(\text{MIN})$  ,and less than 30mA , at  $I(\text{MAX})$ .

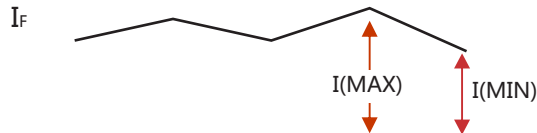

## Recommended Operating Conditions

Please obey the following conditions to ensure proper device operation and resetting. Input LED current (Recommended value):

| Characteristic  | Symbol | Min | Typ. | Max | Unit |
|-----------------|--------|-----|------|-----|------|
| Forward current | $I_F$  | 5.0 | 7.0  | 30  | mA   |


For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

| Characteristic         | Symbol | Min | Typ. | Max | Unit |
|------------------------|--------|-----|------|-----|------|
| Load voltage (Peak AC) | $V_L$  | —   | —    | 48  | V    |

## Surge voltages at the input


If reverse surge voltages are present at the input terminals, connect a diode in reverse parallel across the input terminals and keep the reverse voltages below the reverse breakdown voltage. Typical circuits are below shown.

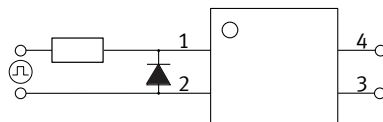


## Protection Circuit

Output spike voltages:if an inductive load generates spike voltages which exceed heabsolute maximum rating, the spike voltage shall be limited.

Clamp diode is connected in parallel with the load.  
Absorb capacity with external diode.

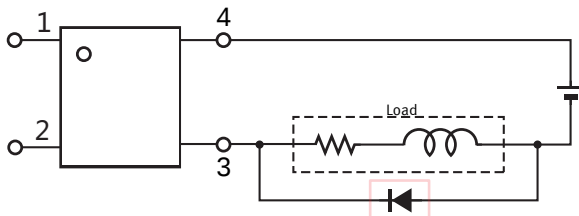

CR Snubber is connected in parallel with the load.  
Absorb capacity with buffer capacity.












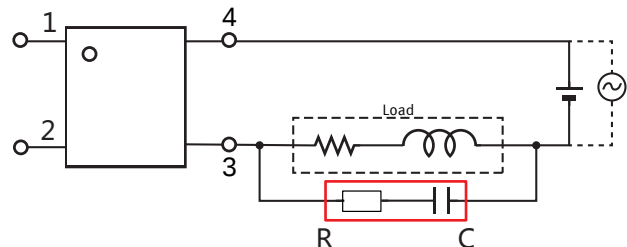


When adding diodes, buffer circuits (C-R), and other protections, they need to be installed near the MOS RELAY to be effective.  
Adding protection elements may result in a slow reset time, so adjust them according to the actual situation before use.

Note: When developing designs using this product, perform the expected performance of the equipment under the operating conditions recommended by the guidelines in this document. Continuous use under heavy loads (including, but not limited to, the application of high temperatures/current/voltage and significant changes in temperature, etc.) may result in deterioration of the reliability of this product.




## Engineering Data




## Dimensions and SMD-4 Package Unit: mm

### Marking

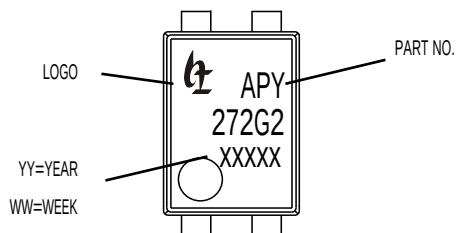


### Surface mount terminal type

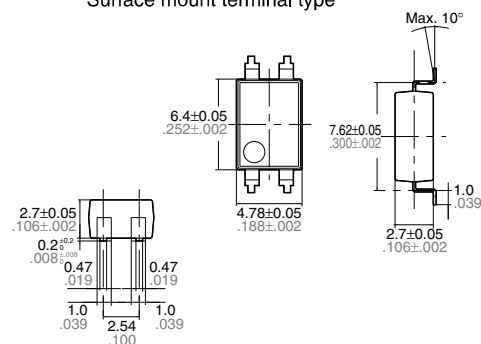


Terminal thickness:  $t = 0.2$   
General tolerance:  $\pm 0.1$

### Lable


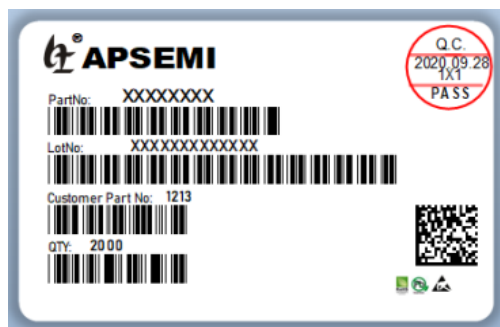


### Recommended mounting pad (TOP VIEW)




Tolerance:  $\pm 0.1$

## Tape dimensions ( tape reel )

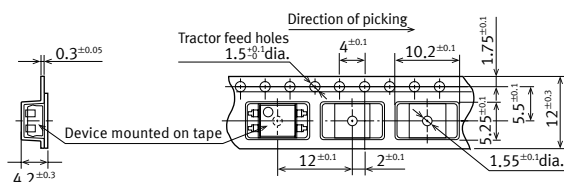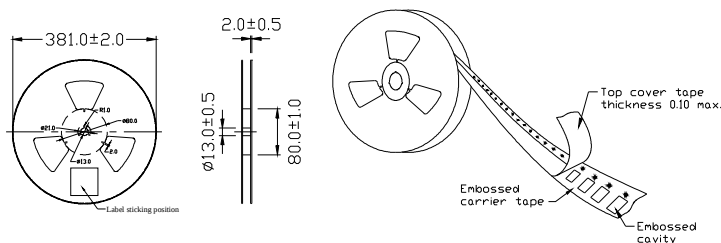


## Dimensions and DIP-4 Package Unit: mm


### Marking

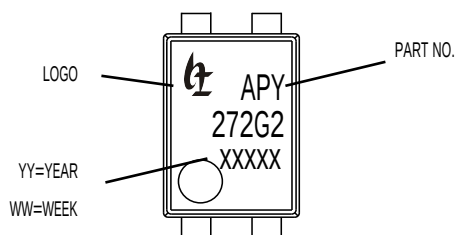

### Lable

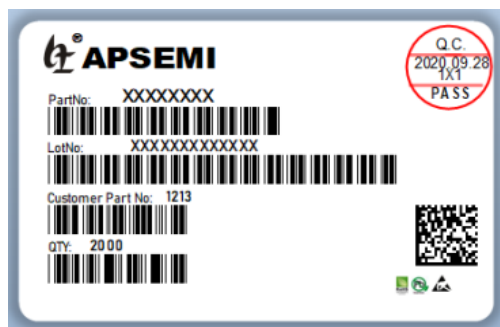


### Surface mount terminal type

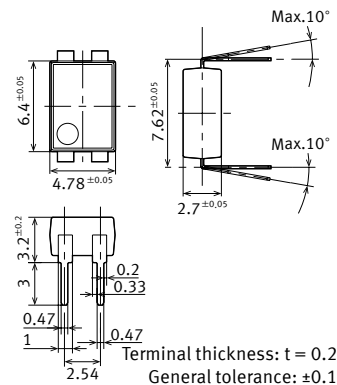

### PC board pattern

#### (BOTTOM VIEW)




Tolerance: ±0.1

## Tape dimensions ( tape reel )

### DIP type

Devices are packaged in a tube so that pin No. 1 is on the stopper B side. Observe correct orientation when mounting them on PC boards.






## Recommended Soldering Conditions

### (a) Infrared reflow soldering :

- Peak reflow soldering : 260°C or below (package surface temperature)
- Time of peak reflow temperature : 10 sec
- Time of temperature higher than 230°C : 30-60 sec
- Time to preheat temperature from 180~190°C : 60-120 sec
- Time(s) of reflow : Two
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

### Recommended Temperature Profile of Infrared Reflow

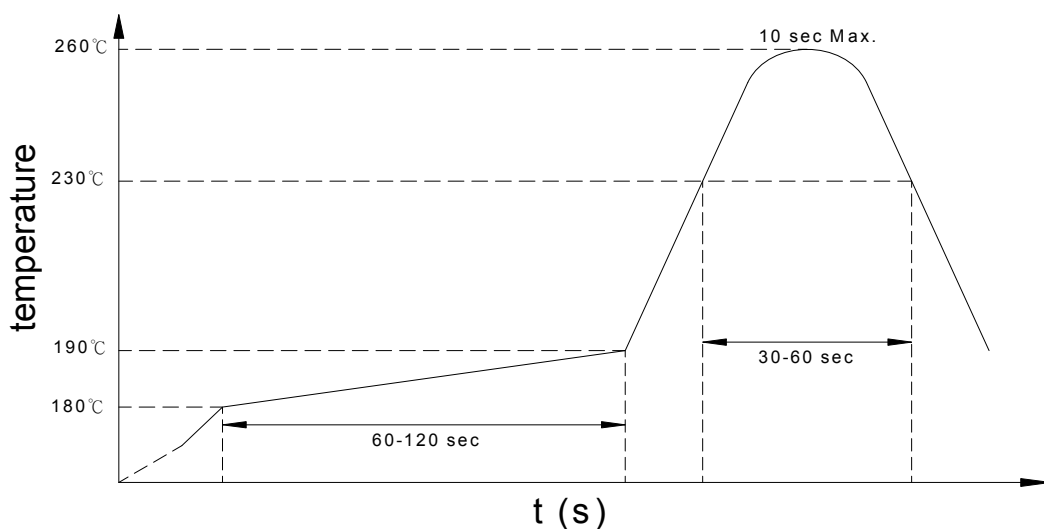

### (b) Wave soldering :

- Temperature : 260°C or below (molten solder temperature)
- Time : 10 seconds or less
- Preheating conditions : 120°C or below (package surface temperature)
- Time(s) of reflow : One
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

### (c) Cautions :

- Fluxes : Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
- Avoid shorting between portion of frame and leads.



## Manufacturing Information

### Moisture Sensitivity



All plastic encapsulated semiconductor packages are susceptible to moisture ingress. APSEMI classifies its plastic encapsulated devices for moisture sensitivity according to the latest revision of the joint industry standard, **IPC/JEDEC J-STD-020**, in force at the time of product evaluation. We test all of our products to the maximum conditions set forth in the standard, and guarantee proper operation of our devices when handled according to the limitations and information in that standard as well as to any limitations set forth in the information or standards referenced below.

Failure to adhere to the warnings or limitations as established by the listed specifications could result in reduced product performance, reduction of operable life, and/or reduction of overall reliability.

This product carries a **Moisture Sensitivity Level (MSL)** classification as shown below, and should be handled according to the requirements of the latest revision of the joint industry standard **IPC/JEDEC J-STD-033**.

| Moisture Sensitivity Level (MSL) Classification |
|-------------------------------------------------|
| MSL 3                                           |

### ESD Sensitivity



This product is ESD Sensitive, and should be handled according to the industry standard **JESD-625**.

### Board Wash

APSEMI recommends the use of no-clean flux formulations. Board washing to reduce or remove flux residue following the solder reflow process is acceptable provided proper precautions are taken to prevent damage to the device. These precautions include but are not limited to: using a low pressure wash and providing a follow up bake cycle sufficient to remove any moisture trapped within the device due to the washing process. Due to the variability of the wash parameters used to clean the board, determination of the bake temperature and duration necessary to remove the moisture trapped within the package is the responsibility of the user (assembler). Cleaning or drying methods that employ ultrasonic energy may damage the device and should not be used. Additionally, the device must not be exposed to halide flux or solvents.

Post high-temperature welding, direct cleaning with dry ice is prohibited.





## **RESTRICTIONS ON PRODUCT USE**

---

APSEMI Co. and its subsidiaries and affiliates (collectively "APSEMI") reserve the right to make changes to all information contained in this document relating to hardware, software, and systems (collectively "Products").

No information in this document may be reproduced without the prior written permission of APSEMI. Even with APSEMI's written permission, this document may only be reproduced if it is guaranteed to be unaltered or missing.

APSEMI assumes no responsibility for unintended uses of the product:

Unintended uses include, but are not limited to, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, automobiles, trains, ships, and other transportation equipment, traffic signaling equipment, equipment used for the control of combustion or explosions, safety devices, elevators and escalators, equipment used in electrical power-related applications, and equipment used in financial-related applications.

APSEMI assumes no responsibility for the product if you use it for any purpose other than the specific purpose described in this document.

- The information contained herein is provided only as a guide for the use of the product.

APSEMI assumes no responsibility for infringement of third party patents or any other intellectual property rights that may result from the use of the product. This document does not grant any license, express or implied, estoppel or otherwise, to any intellectual property.

- GaAs (Gallium Arsenide) is used in products and is harmful to humans. Inadvertent ingestion or absorption of GaAs can harm the human body, so handle the product with care and do not break, cut, crush, grind, chemically dissolve, or otherwise expose GaAs in the product.

- Please be aware of environmental issues and use products in compliance with all applicable laws and regulations governing the inclusion or use of controlled substances, including but not limited to the EU RoHS Directive. APSEMI assumes no responsibility for damages or losses resulting from non-compliance with applicable laws and regulations.



## Revision History

| Revision | Subjects (major changes since last revision) | Date    |
|----------|----------------------------------------------|---------|
| 1.0      | Initial release.                             | 2016.12 |
| 1.1      | I/O Breakdown Voltage Parameter Update       | 2024.05 |
| 1.2      | Added circuit design guide                   | 2024.12 |
|          |                                              |         |
|          |                                              |         |
|          |                                              |         |
|          |                                              |         |
|          |                                              |         |
|          |                                              |         |
|          |                                              |         |
|          |                                              |         |

## Disclaimer

1. Operating conditions may differ from simulation assumptions in several aspects like level of DC-link voltage, applied gate-voltage and gate-resistor, case and junction temperatures as well as the power circuit stray-inductance. Therefore, deviations of parameters and assumptions used for the simulation and the real application may exist.
2. For these reasons we cannot take any responsibility or liability for the exactness or validity of the form's results. The form cannot replace a detailed reflection of the customers application with all of its operating conditions.
3. Accurate results depend on huge data, so with the measured data is increasing, we should be updated in real time and send it to the corresponding engineer so that he can know it in real time.