

TIP41C

DATASHEET

Specification Revision History:

Version	Date	Description
V1.0	2021/11	New
V1.1	2022/03	Modify Ordering Information
V1.2	2024/02	Modify Ordering Information
V1.3	2025/05	Add application precautions and overall typesetting.

Features

Medium Power Complementary Silicon Transistors


Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	TIP41C	Unit
V_{CBO}	Collector-Base Voltage	140	V
V_{CEO}	Collector-Emitter Voltage	100	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	3	A
P_C	Collector Power Dissipation	2	W
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	62.5	°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

The appearance of the product



1. BASE
2. COLLECTOR
3. EMITTER



TO-220-3

Ordering Information









Product Model	Package Type	Packing	Packing Qty
TIP41C255	TO-220-3	TUBE	1000PCS/BOX
TIP41C	TO-220-3	TUBE	1000PCS/BOX

Electrical Characteristics (Ta=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 0.1mA, I_E = 0$	140		V
Collector-emitter breakdown voltage	$V_{CEO(sus)}$	$I_C = 1mA, I_B = 0$	100		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 0.1mA, I_C = 0$	6		V
Collector cut-off current	I_{CBO}	$V_{CB} = 112V, I_E = 0$		0.5	μA
Collector cut-off current	I_{CEO}	$V_{CE} = 60V, I_B = 0$		0.5	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5V, I_C = 0$		1	mA
DC current gain	h_{FE}	$V_{CE} = 5V, I_C = 0.5A$	100	300	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 1A, I_B = 100mA$		0.6	V
Base-emitter saturation voltage	$V_{BE(sat)}$	$I_C = 1A, I_B = 100mA$		1.5	V
Transition frequency	f_T	$V_{CE} = 10V, I_C = 0.5A$ $f = 1MHz$	3		MHZ


*Pulse test

Typical Characteristics

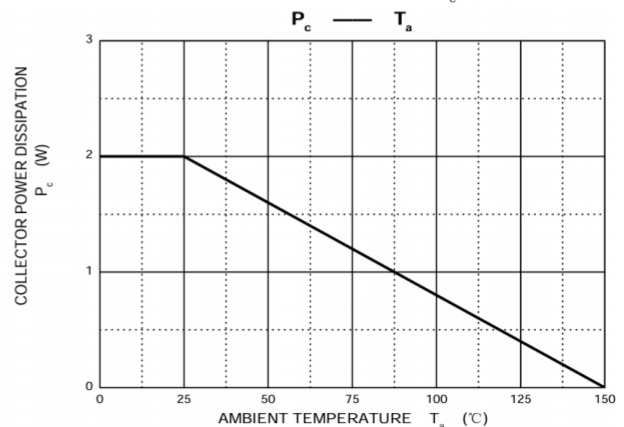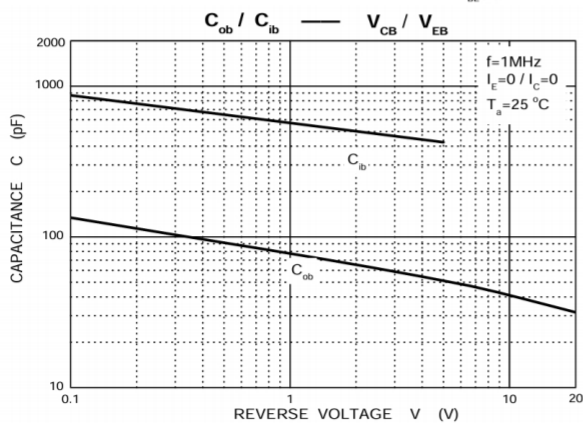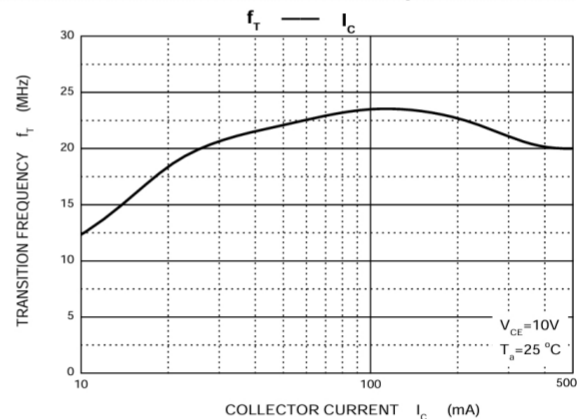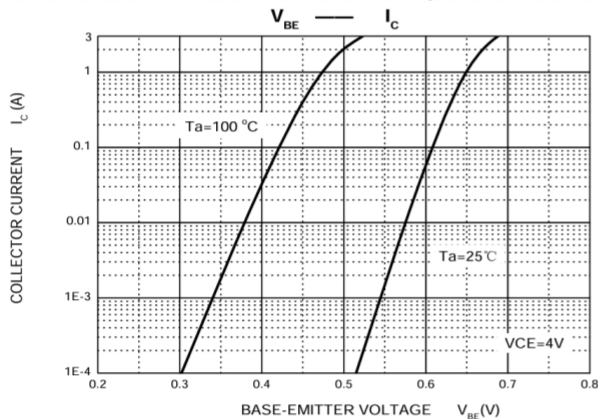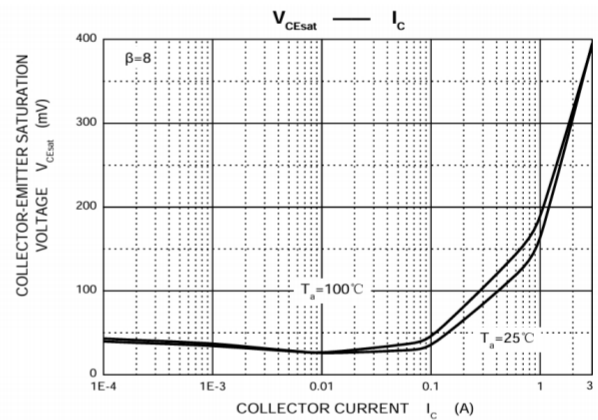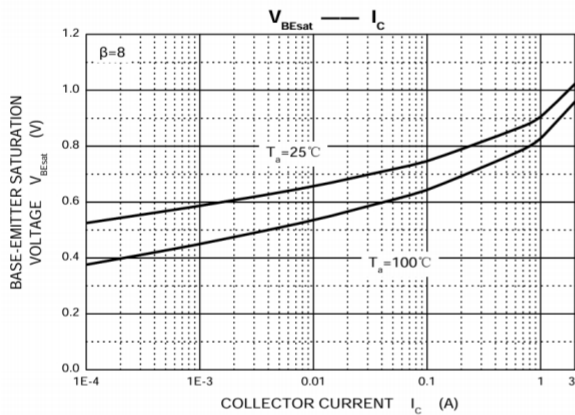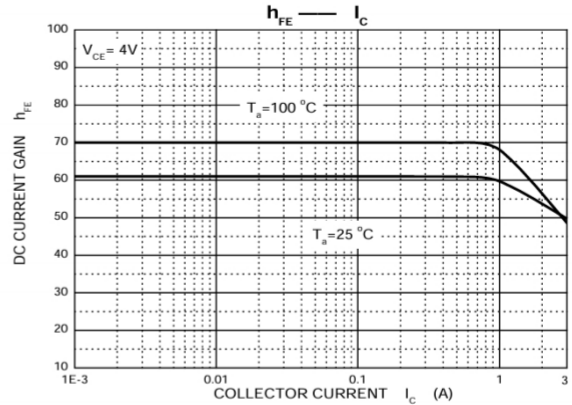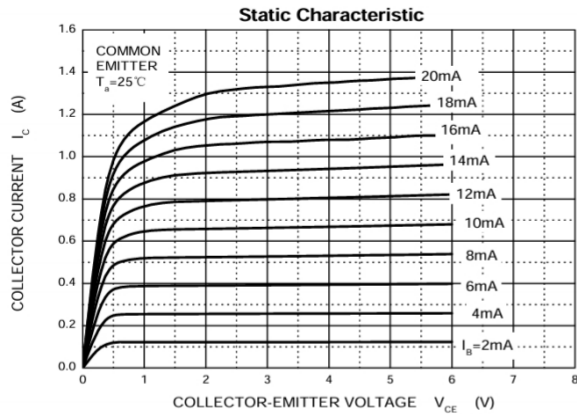

Outline Dimensions

TO-220-3(TO-220C)

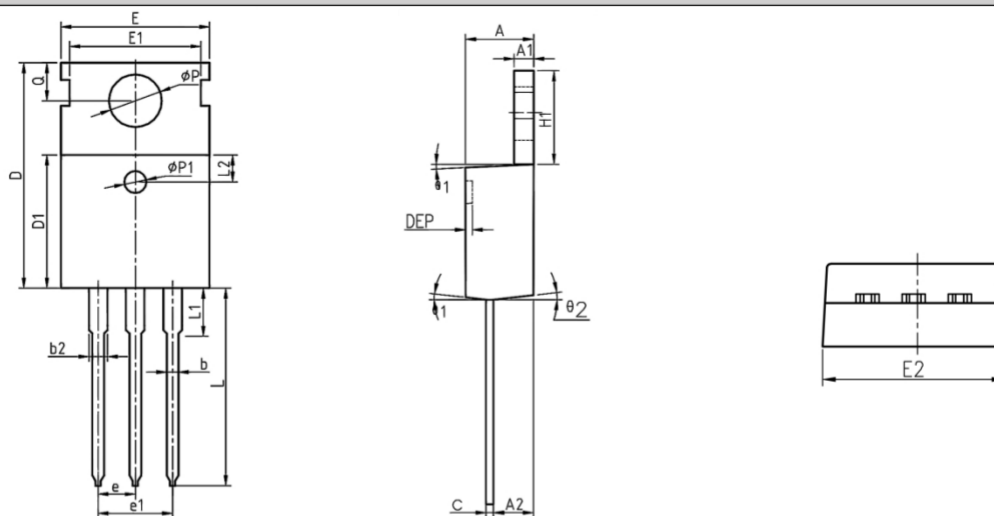

Symbol	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.40	4.57	4.70	0.173	0.180	0.185
A1	1.27	1.30	1.33	0.050	0.051	0.052
A2	2.35	2.40	2.50	0.093	0.094	0.098
b	0.77	0.80	0.90	0.030	0.031	0.035
b2	1.17	1.27	1.36	0.046	0.050	0.054
c	0.48	0.50	0.56	0.019	0.020	0.022
D	15.40	15.60	15.80	0.606	0.614	0.622
D1	9.00	9.10	9.20	0.354	0.358	0.362
DEP	0.05	0.10	0.20	0.002	0.004	0.008
E	9.80	10.00	10.20	0.386	0.394	0.402
E1	-	8.70	-	-	0.343	-
E2	9.80	10.00	10.20	0.386	0.394	0.402
e	2.54BSC			0.100BSC		
e1	5.08BSC			0.200BSC		
H1	6.40	6.50	6.60	0.252	0.256	0.260
L	12.75	13.50	13.65	0.502	0.531	0.537
L1	-	3.10	3.30	-	0.122	0.130
L2	2.50REF			0.098REF		
P	3.50	3.60	3.63	0.138	0.142	0.143
P1	3.50	3.60	3.63	0.138	0.142	0.143
Q	2.73	2.80	2.87	0.107	0.110	0.113
θ1	5°	7°	9°	5°	7°	9°
θ2	1°	3°	5°	1°	3°	5°
θ3	1°	3°	5°	1°	3°	5°

Important Notice

- Green Micro chip reserves the right to change products and documents without notice. Customers should obtain and verify the completeness of the latest technical information before placing orders. Meanwhile, Green Micro chip shall not assume any responsibility or obligation for non-officially revised documents.
- Any parameters in the entire product specification are for reference only, and actual application testing shall prevail. When customers use the products for system design, they must comply with safety regulations and independently assume the following responsibilities: selecting suitable Green Micro chip products according to application requirements; completing design verification and full-link testing of the application; and ensuring that the application complies with safety regulations or other requirements of the target market. Customers shall bear all personal or property losses caused by design defects or illegal operations, which shall have no relation to Green Micro chip.
- Green Micro chip products are prohibited from being used in scenarios such as life support, military equipment, and key aerospace applications. All accidents and legal liabilities arising from out-of-scope use shall be borne by the user, and Green Micro chip shall not be held responsible.
- All technical resources of Green Micro chip (including data sheets and reference designs) are provided "as is", without guarantee of no defects or universality, and without any express or implied warranties. The documents are only authorized for product development and research described in this document. Unauthorized use of intellectual property, public reproduction, and reverse engineering are strictly prohibited. All claims and losses caused by illegal use shall be borne by the user, and Green Micro chip shall not be liable.