


Micro power Phase-Locked Loop

Features

- Wide supply voltage range: 3.0V to 15V
- Low dynamic: 70 μ W (typ.) at
power consumption: $f_o = 10$ kHz, $V_{DD} = 5V$
- VCO frequency: 1.3 MHz (typ.) at $V_{DD} = 10V$
- Low frequency drift: 0.06%/°C at $V_{DD} = 10V$ with temperature
- High VCO linearity: 1% (typ.)

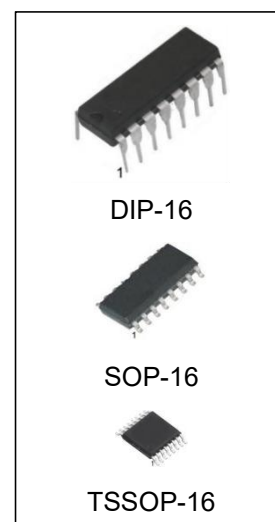

Ordering Information

DEVICE	Package Type	MARKING	Packing	Packing Qty
CD4046BE/ CD4046BN	DIP-16	CD4046B	TUBE	1000pcs/box
CD4046BM/TR	SOP-16	CD4046B	REEL	2500pcs/reel
CD4046BMT/TR	TSSOP-16	CD4046B	REEL	2500pcs/reel

General Description

The CD4046B micropower phase-locked loop (PLL) consists of a low power, linear, voltage-controlled oscillator (VCO), a source follower, a zener diode, and two phase comparators. The two phase comparators have a common signal input and a common comparator input. The signal input can be directly coupled for a large voltage signal, or capacitively coupled to the self-biasing amplifier at the signal input for a small voltage signal. Phase comparator I, an exclusive OR gate, provides a digital error signal (phase comp. I Out) and maintains 90° phase shifts at the VCO center frequency. Between signal input and comparator input (both at 50% duty cycle), it may lock onto the signal input frequencies that are close to harmonics of the VCO center frequency. Phase comparator II is an edge-controlled digital memory network. It provides a digital error signal (phase comp. II Out) and lock-in signal (phase pulses) to indicate a locked condition and maintains a 0° phase shift between signal input and comparator input.

The linear voltage-controlled oscillator (VCO) produces an output signal (VCO Out) whose frequency is determined by the voltage at the VCO_{IN} input, and the capacitor and resistors connected to pin C1_A, C1_B, R1 and R2. The source follower output of the VCO_{IN} (demodulator Out) is used with an external resistor of 10 kΩ or more. The INHIBIT input, when high, disables the VCO and source follower to minimize standby power consumption. The zener diode is provided for power supply regulation, if necessary.

Applications

FM demodulator and modulator
Frequency synthesis and multiplication
Frequency discrimination
Data synchronization and conditioning
Voltage-to-frequency conversion
Tone decoding
FSK modulation
Motor speed control

Block & Connection Diagrams


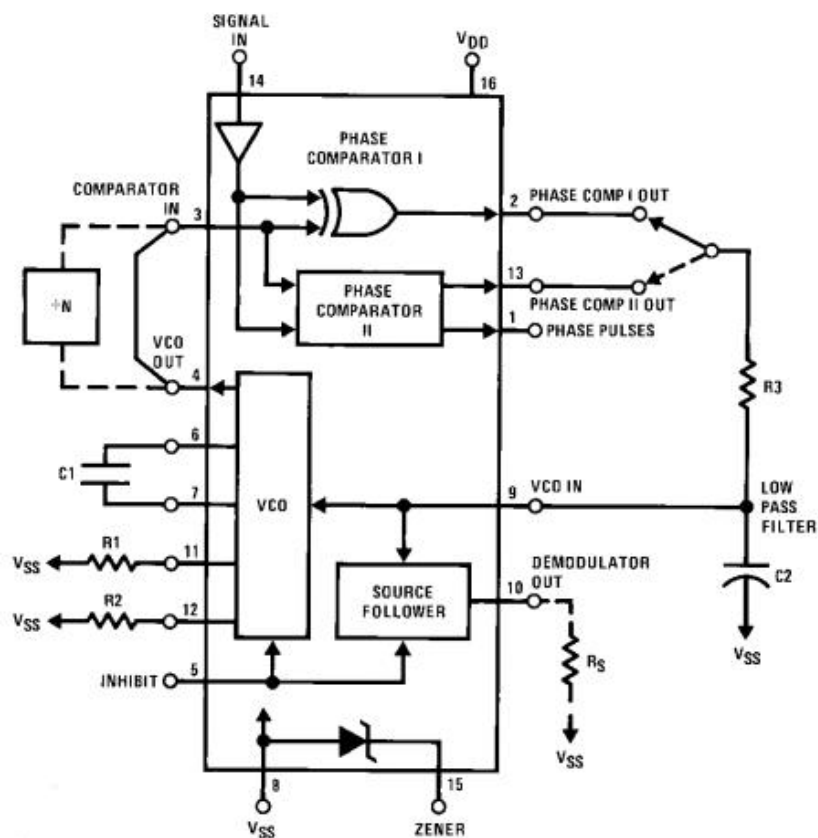


FIGURE 1

Dual-In-Line Package

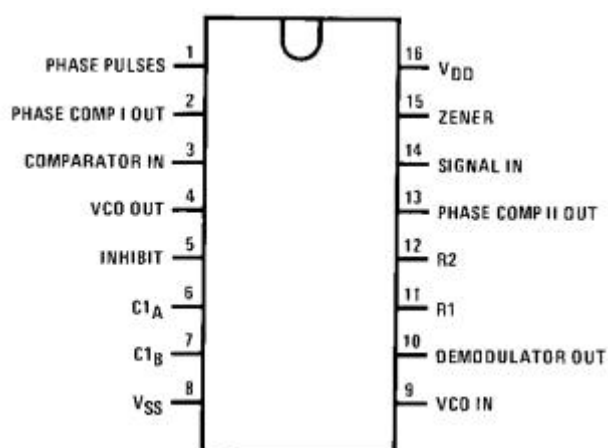

Top View

Order Number CD4046B

Absolute Maximum Ratings (Notes 1 & 2)

Condition	Min	Max	UNITS
DC Supply Voltage (V_{DD})	-0.5	+18	V
Input Voltage (V_{IN})	-0.5	+0.5	V
Storage Temperature Range (T_S)	-65	150	°C
Power Dissipation (P_D)	-	-	-
Dual-In-Line	-	700	mW
Small Outline	-	500	mW
Lead Temperature (T_L)(Soldering, 10 seconds)	-	260	°C

Recommended Operating Conditions (Note 2)

Condition	Min	Max	UNITS
DC Supply Voltage (V_{DD})	+3	+15	V
Input Voltage (V_{IN})	0 to V_{DD}		V
Operating Temperature Range (T_A)	-40	+85	°C

DC Electrical Characteristics (Note 2)

Symbol	Parameter	Conditions	-40°C		+25°C			+85°C		Units
			Min	Max	Min	Typ	Max	Min	Max	
I _{DD}	Quiescent Device Current	Pin 5 = V _{DD} , Pin 14 = V _{DD} , Pin 3, 9 = V _{SS} V _{DD} = 5V		20		0.005	20		150	μA
		V _{DD} = 10V		40		0.01	40		300	μA
		V _{DD} = 15V		80		0.015	80		600	μA
		Pin 5 = V _{DD} , Pin 14 = Open, Pin 3, 9 = V _{SS} V _{DD} = 5V		70		5	55		205	μA
		V _{DD} = 10V		530		20	410		710	μA
		V _{DD} = 15V		1500		50	1200		1800	μA
V _{OL}	Low Level Output Voltage	V _{DD} = 5V		0.05		0	0.05		0.05	V
		V _{DD} = 10V		0.05		0	0.05		0.05	V
		V _{DD} = 15V		0.05		0	0.05		0.05	V
V _{OH}	High Level Output Voltage	V _{DD} = 5V	4.95		4.95	5		4.95		V
		V _{DD} = 10V	9.95		9.95	10		9.95		V
		V _{DD} = 15V	14.95		14.95	15		14.95		V
V _{IL}	Low Level Input Voltage Comparator and Signal In	V _{DD} = 5V, V _O = 0.5V or 4.5V		1.5		2.25	1.5		1.5	V
		V _{DD} = 10V, V _O = 1V or 9V		3.0		4.5	3.0		3.0	V
		V _{DD} = 15V, V _O = 1.5V or 13.5V		4.0		6.25	4.0		4.0	V
V _{IH}	High Level Input Voltage Comparator and Signal In	V _{DD} = 5V, V _O = 0.5V or 4.5V	3.5		3.5	2.75		3.5		V
		V _{DD} = 10V, V _O = 1V or 9V	7.0		7.0	5.5		7.0		V
		V _{DD} = 15V, V _O = 1.5V or 13.5V	11.0		11.0	8.25		11.0		V
I _{OL}	Low Level Output Current (Note 4)	V _{DD} = 5V, V _O = 0.4V	0.52		0.44	0.88		0.36		mA
		V _{DD} = 10V, V _O = 0.5V	1.3		1.1	2.25		0.9		mA
		V _{DD} = 15V, V _O = 1.5V	3.6		3.0	8.8		2.4		mA
I _{OH}	High Level Output Current (Note 4)	V _{DD} = 5V, V _O = 4.6V	-0.52		-0.44	-0.88		-0.36		mA
		V _{DD} = 10V, V _O = 9.5V	-1.3		-1.1	-2.25		-0.9		mA
		V _{DD} = 15V, V _O = 13.5V	-3.6		-3.0	-8.8		-2.4		mA
I _{IN}	Input Current	All Inputs Except Signal Input V _{DD} = 15V, V _{IN} = 0V		-0.3		-10 ⁻⁵	-0.3		-1.0	μA
		V _{DD} = 15V, V _{IN} = 15V		0.3		10 ⁻⁵	0.3		1.0	μA
C _{IN}	Input Capacitance	Any Input (Note 3)					7.5			pF
P _T	Total Power Dissipation	f _o = 10 kHz, R1 = 1 MΩ R2 = ∞, VCO _{IN} = V _{DD} /2 V _{DD} = 5V				0.07				mW
		V _{DD} = 10V				0.6				mW
		V _{DD} = 15V				2.4				mW

Note 1: "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the devices should be operated at these limits. The table of "Recommended Operating Conditions" and "Electrical Characteristics" provides conditions for actual device operation.

Note 2: V_{SS} = 0V unless otherwise specified.

Note 3: Capacitance is guaranteed by periodic testing.

Note 4: I_{OH} and I_{OL} are tested one output at a time.

AC Electrical Characteristics* TA = 25°C, CL = 50 pF

Symbol	Parameter	Conditions	Min	Typ	Max	Units
VCO SECTION						
I _{DD}	Operating Current	fo = 10 kHz, R1 = 1 MΩ R2 = ∞, VCO _{IN} = V _{DD} /2 V _{DD} = 5V V _{DD} = 10V V _{DD} = 15V		20 90 200		μA μA μA
f _{MAX}	Maximum Operating Frequency	C1 = 50 pF, R1 = 10 kΩ, R2 = ∞, VCO _{IN} = V _{DD} V _{DD} = 5V	0.4	0.8		MHz
		V _{DD} = 10V	0.6	1.2		MHz
		V _{DD} = 15V	1.0	1.6		MHz
	Linearity	VCO _{IN} = 2.5V ± 0.3V, R1 ≥ 10 kΩ, V _{DD} = 5V		1		%
		VCO _{IN} = 5V ± 2.5V, R1 ≥ 400 kΩ, V _{DD} = 10V		1		%
		VCO _{IN} = 7.5V ± 5V, R1 ≥ 1 MΩ, V _{DD} = 15V		1		%
	Temperature-Frequency Stability No Frequency Offset, f _{MIN} = 0	%/°C ∞ 1/f, V _{DD} R2 = ∞ V _{DD} = 5V		0.12 - 0.24		%/°C
		V _{DD} = 10V		0.04 - 0.08		%/°C
		V _{DD} = 15V		0.015 - 0.03		%/°C
VCO _{IN}	Input Resistance	V _{DD} = 5V		10 ⁶		MΩ
		V _{DD} = 10V		10 ⁶		MΩ
		V _{DD} = 15V		10 ⁶		MΩ
VCO	Output Duty Cycle	V _{DD} = 5V		50		%
		V _{DD} = 10V		50		%
		V _{DD} = 15V		50		%
t _{THL} t _{THL}	VCO Output Transition Time	V _{DD} = 5V		90	200	ns
		V _{DD} = 10V		50	100	ns
		V _{DD} = 15V		45	80	ns

*AC Parameters are guaranteed by DC correlated testing.

AC Electrical Characteristics* TA e 25°C, CL = 50 pF (Continued)

Symbol	Parameter	Conditions	Min	Typ	Max	Units	
PHASE COMPARATORS SECTION							
R _{IN}	Input Resistance Signal Input	V _{DD} = 5V	1	3		MΩ	
		V _{DD} = 10V	0.2	0.7		MΩ	
	Comparator Input	V _{DD} = 15V	0.1	0.3		MΩ	
		V _{DD} = 5V		106		MΩ	
		V _{DD} = 10V		106		MΩ	
		V _{DD} = 15V		106		MΩ	
		AC-Coupled Signal Input Voltage Sensitivity	C _{SERIES} = 1000 pF f = 50 kHz				
			V _{DD} = 5V		200	400	mV
	V _{DD} = 10V			400	800	mV	
	V _{DD} = 15V			700	1400	mV	
DEMODULATOR OUTPUT							
V _{COIN} - V _{DEM}	Offset Voltage	RS ≥ 10 kΩ, V _{DD} = 5V		1.50	2.2	V	
		RS ≥ 10 kΩ, V _{DD} = 10V		1.50	2.2	V	
		RS ≥ 50 kΩ, V _{DD} = 15V		1.50	2.2	V	
	Linearity	RS ≥ 50 kΩ					
		V _{COIN} = 2.5V±0.3V, V _{DD} = 5V		0.1		%	
		V _{COIN} = 5V±2.5V, V _{DD} = 10V		0.6		%	
ZENER DIODE							
V _Z	Zener Diode Voltage	I _Z = 50 μA	6.3	7.0	7.7	V	
R _Z	Zener Dynamic Resistance	I _Z = 1 mA		100		Ω	

*AC Parameters are guaranteed by DC correlated testing.

Phase Comparator State Diagrams

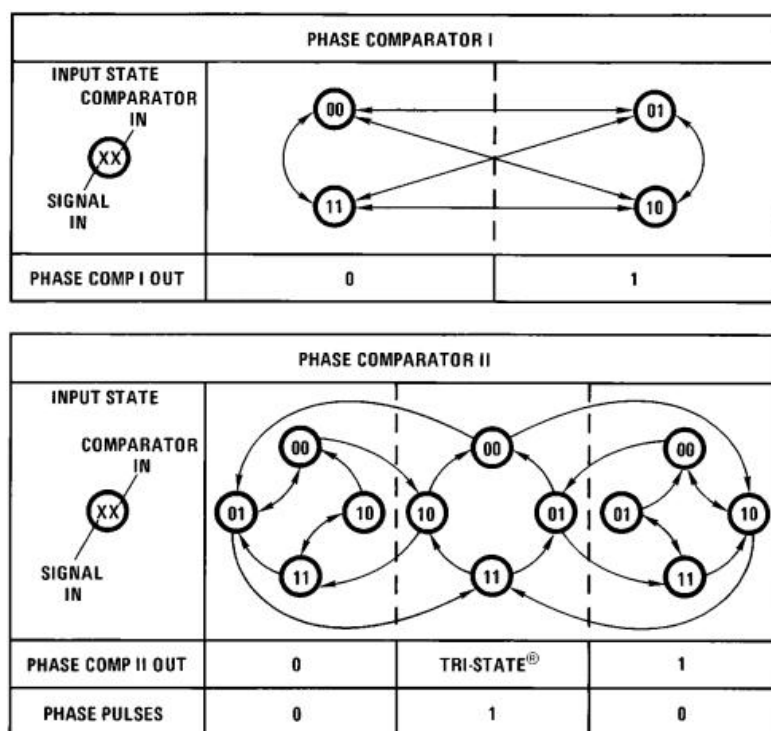


FIGURE 2

Typical Waveforms

PHASE COMPARATOR I

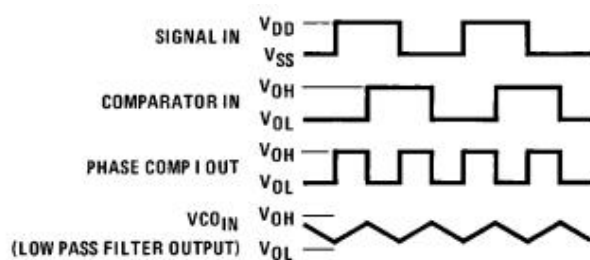


FIGURE 3. Typical Waveform Employing Phase Comparator I in Locked Condition

PHASE COMPARATOR I

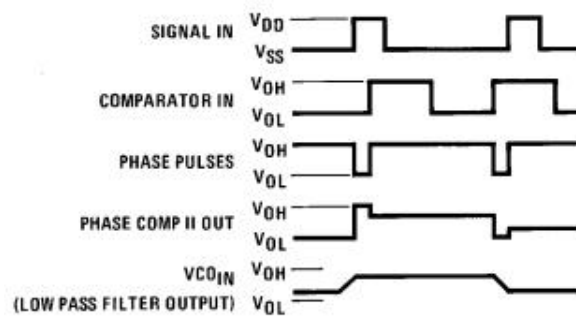


FIGURE 4. Typical Waveform Employing Phase Comparator II in Locked Condition

Typical Performance Characteristics

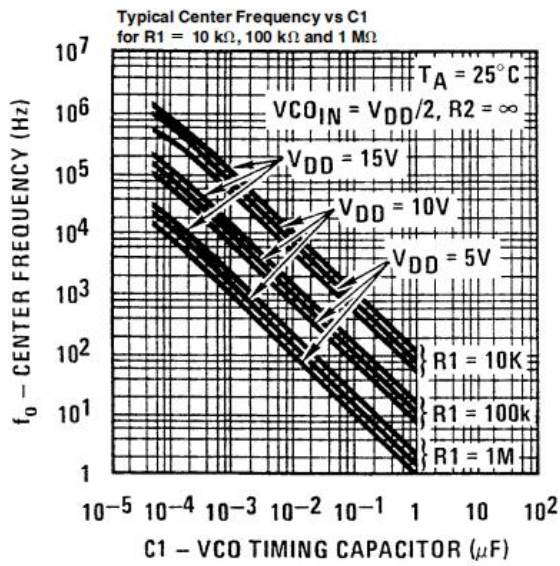


FIGURE 5a

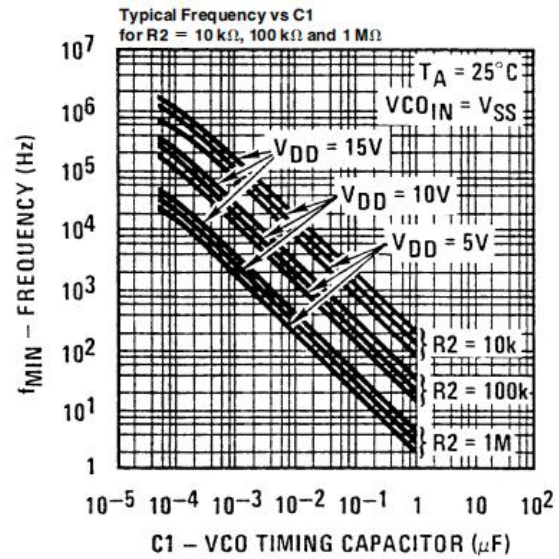


FIGURE 5b

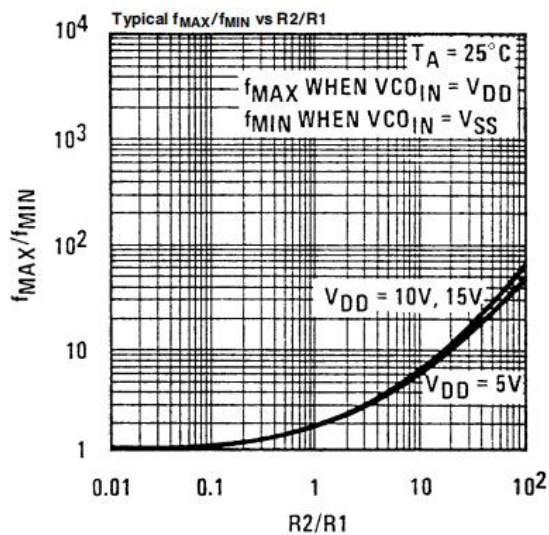


FIGURE 5c

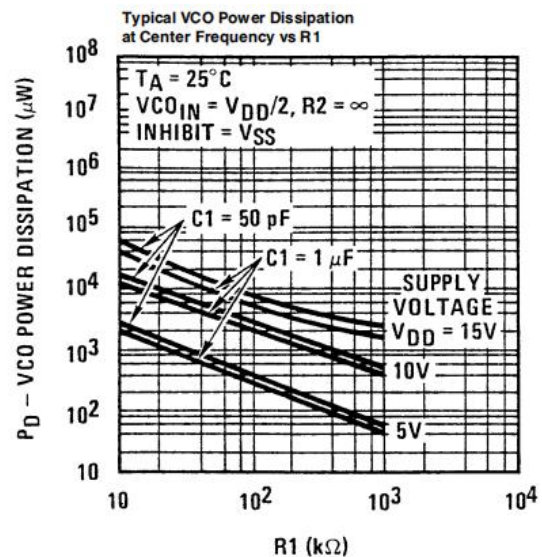


FIGURE 6a

Note: To obtain approximate total power dissipation of PLL system for no-signal input: Phase Comparator I, P_D (Total) - P_D (f_0) + P_D (f_{MIN}) + P_D (RS); Phas - Comparator II, P_D (Total) - P_D (f_{MIN}).

Typical Performance Characteristics (Continued)

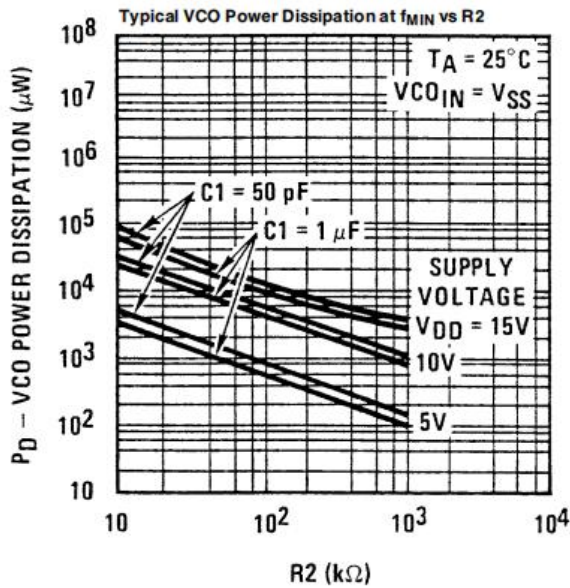


FIGURE 6b

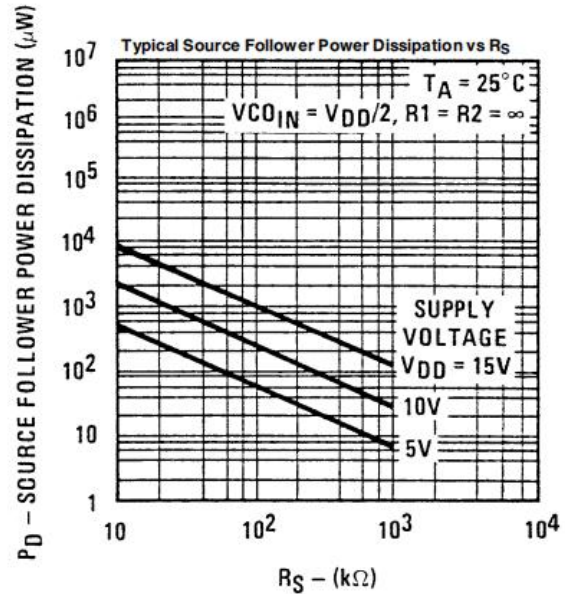


FIGURE 6c

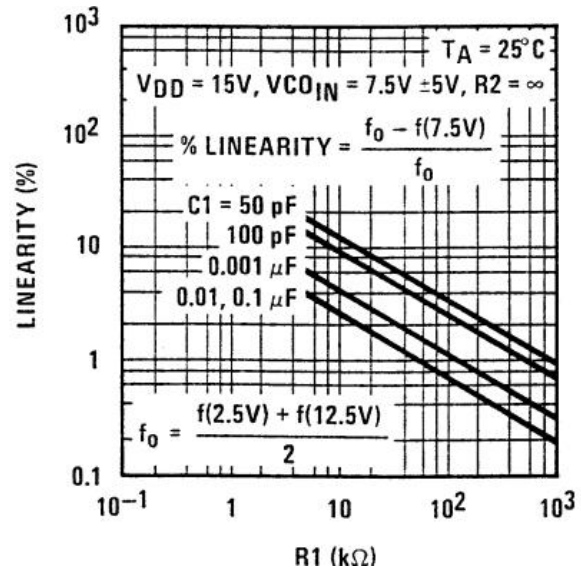
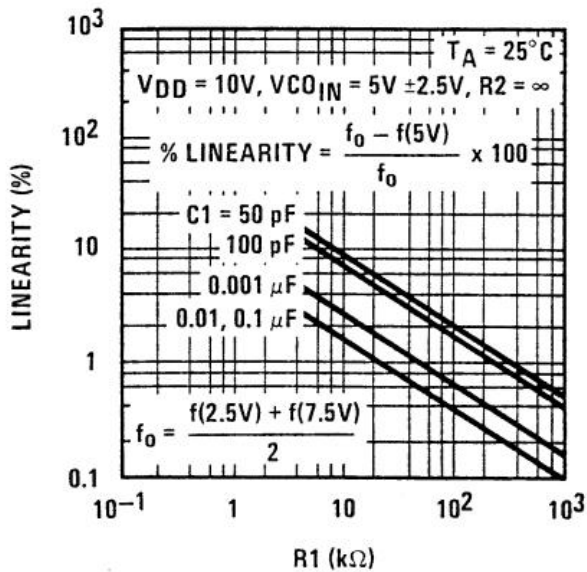








FIGURE 7. Typical VCO Linearity vs R_1 and C_1

Note: To obtain approximate total power dissipation of PLL system for no-signal input: Phase Comparator I, $P_D \text{ (Total)} - P_D (f_0) + P_D (f_{MIN}) + P_D (R_S)$; Phase Comparator II, $P_D \text{ (Total)} - P_D (f_{MIN})$.


Design Information

This information is a guide for approximating the value of external components for the CD4046B in a phase-locked-loop system. The selected external components must be within the following ranges: $R_1, R_2 \geq 10 \text{ k}\Omega$, $R_S \geq 10 \text{ k}\Omega$, $C_1 \geq 50 \text{ pF}$. In addition to the given design information, refer to Figure 5 for R_1, R_2 and C_1 component selections.

Characteristics	Using Phase Comparator I		Using Phase Comparator II	
	VCO Without Offset R2= ∞	VCO With Offset	VCO Without Offset R2= ∞	VCO With Offset
VCO Frequency				
For No Signal Input	VCO in PLL system will adjust to center frequency, fo		VCO in PLL system will adjust to lowest operating frequency, fmin	
Frequency Lock Range, 2 fL	2 fL = full VCO frequency range 2 fL = fmax - fmin			
Frequency Capture Range, 2 fC		$2f_c \approx \frac{1}{\pi} \sqrt{\frac{2\pi f_L}{\pi 1}}$	fC = fL	
Loop Filter Component Selection		For 2 fC, see Ref.		
Phase Angle Between Single and Comparator	90° at center frequency (fo), approximating 0° and 180° at ends of lock range (2 fL)		Always 0° in lock	
Locks on Harmonics of Center Frequency	Yes		No	
Signal Input Noise Rejection	High		Low	
VCO Component Selection	Given: fo. Use fo with Figure 5a to determine R1 and C1.	Given: fo and fL. Calculate fmin from the equation fmin = fo - fL. Use fmin with Figure 5b to determine R2 and C1. Calculate $\frac{f_{max}}{f_{min}}$ from the equation $\frac{f_{max}}{f_{min}} = \frac{f_0 + f_L}{f_0 - f_L}$ Use $\frac{f_{max}}{f_{min}}$ with Figure 5c to determine ratio R2/ R1 to obtain R1.	Given: fmax. Calculate fo from the equation $F_o = \frac{f_{max}}{2}$ Use fo with Figure 5a to determine R1 and C1.	Given: fmin and fmax Use fmin with Figure 5b to determine $\frac{f_{max}}{f_{min}}$ Use $\frac{f_{max}}{f_{min}}$ with Figure 5c to determine ration R2/R1 to obtain R1.


Physical Dimensions

DIP-16

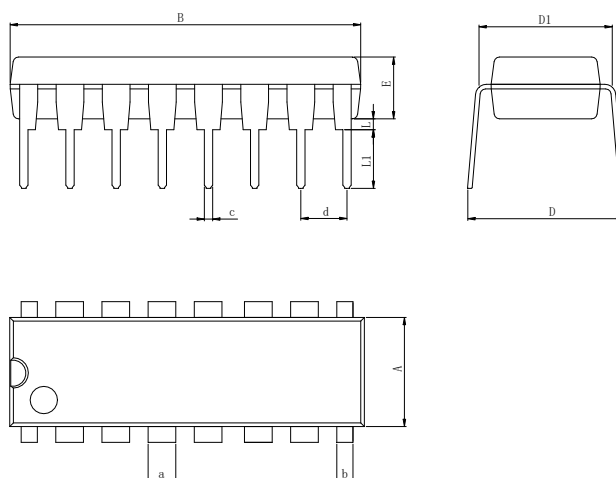

Dimensions In Millimeters(DIP-16)											
Symbol:	A	B	D	D1	E	L	L1	a	b	c	d
Min:	6.10	18.94	8.10	7.42	3.10	0.50	3.00	1.50	0.85	0.40	2.54 BSC
Max:	6.68	19.56	10.9	7.82	3.55	0.70	3.60	1.55	0.90	0.50	


SOP-16

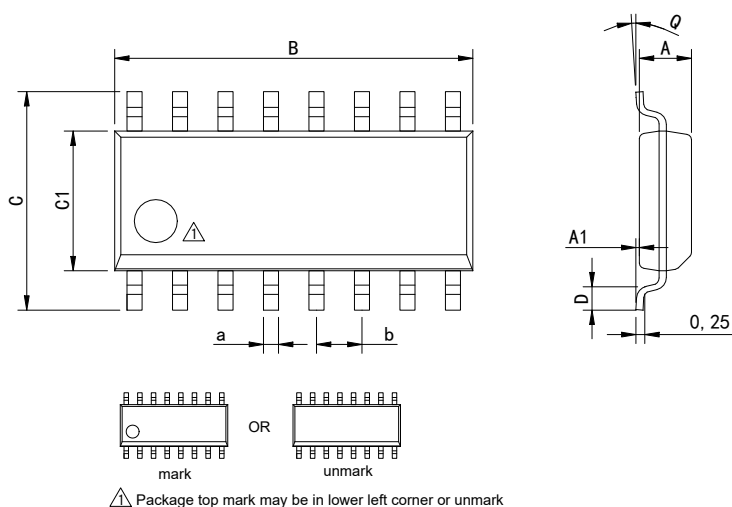

Dimensions In Millimeters(SOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	1.35	0.05	9.80	5.80	3.80	0.40	0°	0.35	1.27 BSC
Max:	1.55	0.20	10.0	6.20	4.00	0.80	8°	0.45	

Physical Dimensions

TSSOP-16

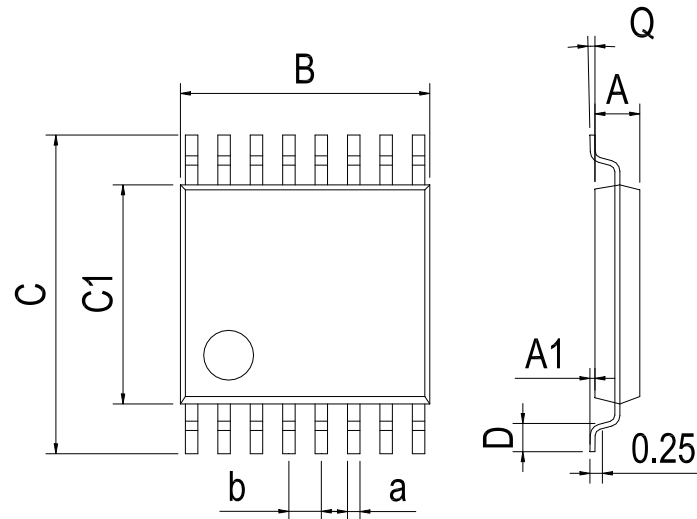

Dimensions In Millimeters(TSSOP-16)									
Symbol:	A	A1	B	C	C1	D	Q	a	b
Min:	0.85	0.05	4.90	6.20	4.30	0.40	0°	0.20	0.65 BSC
Max:	0.95	0.20	5.10	6.60	4.50	0.80	8°	0.25	

Revision History

REVISION NUMBER	DATE	REVISION	PAGE
V1.0	2014-6	New	1-15
V1.1	2015-11	Modify the package dimension diagram TSSOP-16 、 Updated DIP-16 dimension、 Add annotation for Maximum Ratings	4、 12、 13
V1.2	2023-8	Update encapsulation type、 Update DIP Package New Model	1
V1.3	2024-10	Update Lead Temperature	4
V1.4	2025-11	Update important statements、 Update SOP-16 Dimension drawing	12、 15

IMPORTANT STATEMENT:

Huaguan Semiconductor reserves the right to change products and services offered without prior notice. Customers should obtain the latest relevant information before placing orders and verify that such information is current and complete. Huaguan Semiconductor assumes no responsibility or liability for altered documents.

Customers are responsible for complying with safety standards and implementing safety measures when using Huaguan Semiconductor products in system design and end-product manufacturing. You assume full responsibility for: selecting the appropriate Huaguan Semiconductor products for your application; designing, validating, and testing your application; and ensuring that your application complies with applicable standards and all other safety, security, or other requirements. This is to prevent potential risks that may lead to personal injury or property damage.

Huaguan Semiconductor products are not approved for use in life support, military, aerospace, or other high-risk applications. Huaguan products are neither intended nor warranted for use in such systems or equipment. Any failure or malfunction may lead to personal injury or severe property damage. Such applications are deemed "Unsafe Use." Unsafe Use includes, but is not limited to: surgical and medical equipment, nuclear energy control equipment, aircraft or spacecraft instruments, control or operation of vehicle power, braking, or safety systems, traffic signal instruments, all types of safety devices, and any other applications intended to support or sustain life. Huaguan Semiconductor shall not be liable for consequences resulting from Unsafe Use in these fields. Users must independently evaluate and assume all risks. Any issues, liabilities, or losses arising from the use of products beyond their approved applications shall be solely borne by the user. Users may not claim any compensation from Huaguan Semiconductor based on these terms. If any third party claims against Huaguan Semiconductor due to such Unsafe Use, the user shall compensate Huaguan Semiconductor for all resulting damages and liabilities.

Huaguan Semiconductor provides technical and reliability data (including datasheets), design resources (including reference designs), application or other design advice, web tools, safety information, and other resources for its semiconductor products. However, no guarantee is made that these resources are free from defects, and no express or implied warranties are provided. The use of testing and other quality control techniques is limited to Huaguan Semiconductor's quality assurance scope. Not all parameters of each device are tested.

Huaguan Semiconductor's documentation authorizes you to use these resources only for developing applications related to the products described herein. You are not granted rights to any other intellectual property of Huaguan Semiconductor or any third party. Any other reproduction or display of these resources is strictly prohibited. You shall fully indemnify Huaguan Semiconductor and its agents against any claims, damages, costs, losses, and liabilities arising from your use of these resources. Huaguan Semiconductor shall not be held responsible.