

1

2

3

4

5

6

7

8

SAMZO

REAC/ROHS

REV	ECN NO	DESRPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2019.06.12

Technical Requirements

1. Frequency: 0~3 GHz

2. Impedance: 50 Ω

3. VSWR: ≤ 1.35

4. Operating Voltage: 500 V

5. Withstand Voltage: 1500 V

6. Insulation Resistance: ≥ 5000 MΩ

7. Contact Resistance: Inner conductor ≤ 1.5 mΩ
Outer conductor ≤ 1 mΩ

8. Insertion Loss: ≤ 0.3 dB

9. Unspecified tolerances shall be ±0.2

28

11


4

3,2

1,7

9,6

11

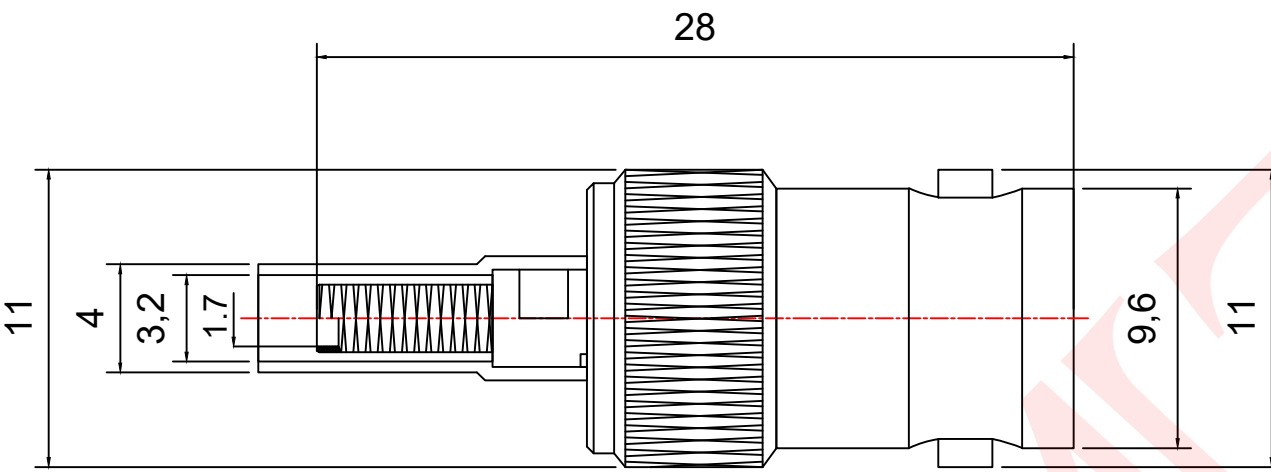

BNC-K-280-L0-N

Surface treatment镀层:镀镍

Pin position脚位:180° 压接

Length体长:28.0mm


Product number编号:K-1.5开窗网纹

Product series系列:BNC同轴射频天线座


13

5

4

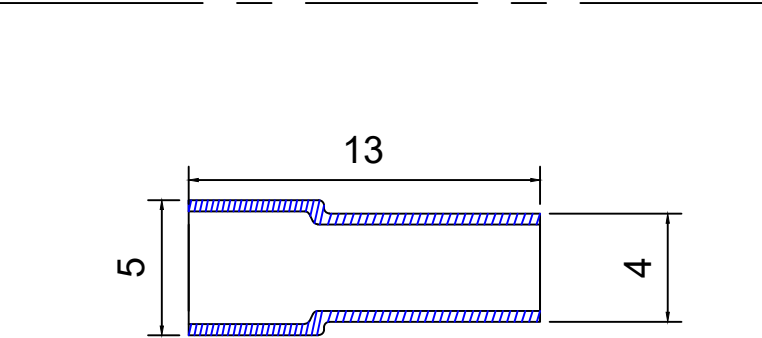

压接管

ITEM	DESCRIPTION	MATERIAL	QTY	FINSH/COLOR						FIRST VIEW				The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts. WWW.SANCNN.COM		TITLE: 全铜BNC-K-1.5 BNC开窗式 母头50-1.5RG316RG174线	
C	插孔	HPB59-1	1													DWG NO: BNC280-P210	
B	绝缘体	聚四氟乙烯	1				GENERAL TOLERANCE				SCALE	1:1	UNIT	mm	PART NO: BNC280-08740		
A	主体	黄铜	1	镀镍				≥0~2<	±0.15	MODEL NO: BNC-K-280-L0-N					NAME: BNC COAXIAL RF CONNECTOR		
					DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25	SAMZO COMPONENTS Electronic switch and connector manufacturer							
					CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15								
					APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35								
1	2	3	4	5	6	7	8										