



钜地半导体
Tudi Semiconductor

Product Specification

TUDI-TL084

JFET input quad op-amp

网址 www.sztdbdt.com Q

用芯智造 · 卓越品质

**semiconductor device
manufacturer**

- Design
- research and development
- production
- and sales



Features

- Wide common-mode (up to VCC+) and differential voltage range
- Low input bias and offset current
- Output short-circuit protection
- High input impedance JFET input stage
- Internal frequency compensation
- Latch up free operation
- High slew rate: 16V/ μ s (typ)


Application

- Solar: String and central inverters
- Motor drives: AC and servo drive control and power stage modules
- Single-phase online UPS
- Three-phase UPS
- Professional audio mixers
- Battery test equipment

Description


The TL084 is high-speed JFET input quad operational amplifiers incorporating well matched, high voltage JFET and bipolar transistors in a monolithic integrated circuit.

The devices feature high slew rates, low input bias and offset currents, and low offset voltage temperature coefficient.

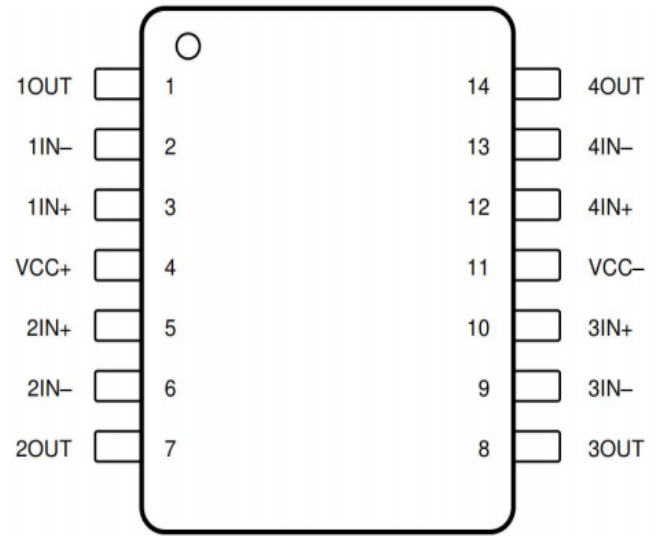



Functional block diagram

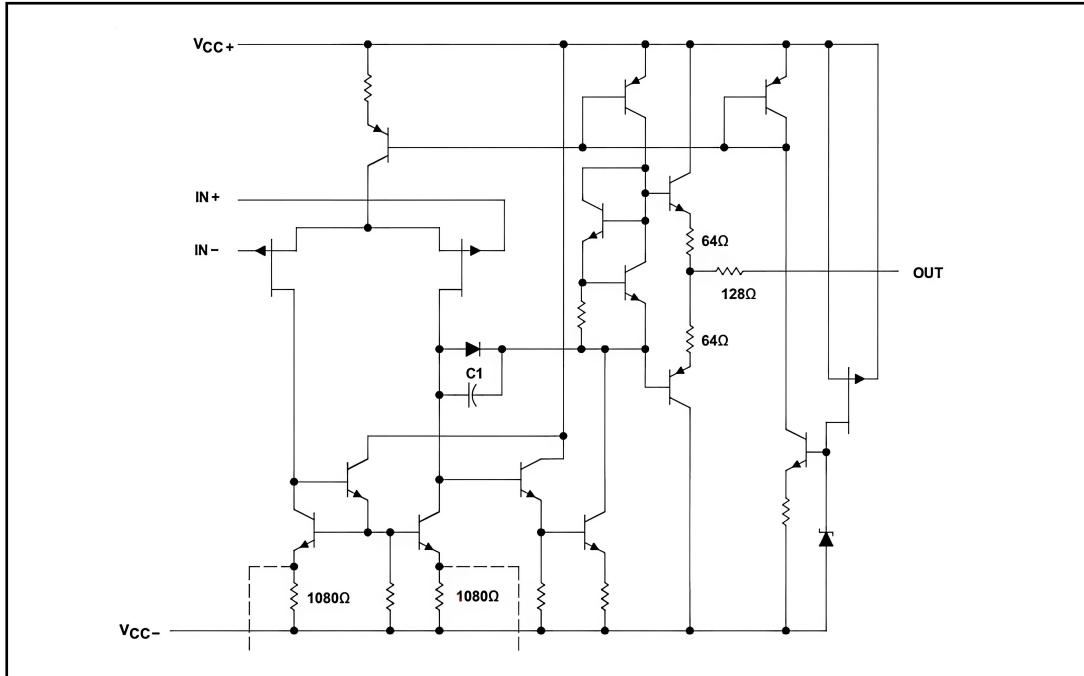

Pin description

Pin numbering	Pin Name	I/O	describe
1	10UT	O	Route 1 Op-Amp Output
2	1IN-	I	Inverting input of the first operational amplifier
3	1IN+	I	Route 1: Op-Amp Positive Input
4	V _{CC} +	P	Positive power supply
5	2IN+	I	Channel 2 Op-Amp Positive Input
6	2IN-	I	Channel 2 Op-Amp Reverse Input
7	2OUT	O	Channel 2 Op-Amp Output
8	3OUT	O	Route 3 Op-Amp Output
9	3IN-	I	Route 3 Op-Amp Reverse Input
10	3IN+	I	Route 3 Op-Amp Positive Input
11	V _{CC} -	P	Negative power supply
12	4IN+	I	Channel 4 Op-Amp Positive Input
13	4IN-	I	Channel 4 Op-Amp Reverse Input
14	4OUT	O	Channel 4 Op-Amp Output



Limit parameters (unless otherwise specified, $T_A=25^{\circ}\text{C}$)

Parameter	Characteristic	Price
supply voltage	V_{CC}	$\pm 18\text{V}$
Differential input voltage	V_{iD}	$\pm 30\text{V}$
input voltage	V_I	$\pm 15\text{V}$
Maximum operating junction temperature	T_j	150°C
operating temperature range	T_A	$-40\sim+125^{\circ}\text{C}$
storage temperature	T_s	$-65\sim+150^{\circ}\text{C}$
Lead temperature (welding, 10 s)	T_w	260°C

Recommended operating conditions (unless otherwise specified, $T_A=25^{\circ}\text{C}$)

parameter	symbol	MIN	MAX	UNIT
Positive power supply	V_{CC+}	+5	+15	V
Negative power supply	V_{CC-}	-5	-15	V
common-mode input voltage	V_{CM}	$(V_{CC-})+4$	$(V_{CC+})-4$	V

Electrical characteristics (unless otherwise specified, $T_A=25^{\circ}\text{C}$)

parameter	characteristic	test condition	MIN	TYP	MAX	UNIT
Power supply current (per channel)	I_{CC}	$V_o=0\text{V}, R_L=\infty$	-	1.8	2.8	mA
Input offset voltage	V_{io}	$V_o=0\text{V}$	-	± 2	± 6	mV
input offset current	I_{io}	$V_o=0\text{V}$	-	± 50	-	pA
input bias current	I_B	$V_o=0\text{V}$	-	± 200	-	pA
common-mode input voltage	V_{CM}		± 11	-	-	V
Output voltage amplitude	V_{OM}	$R_L=10\text{k}\Omega$	± 12	± 13.5	-	V
		$R_L=2\text{k}\Omega$	± 10	± 12	-	V
open loop voltage gain	A_{OL}	$V_o=\pm 10\text{V}, R_L\geq 2\text{k}\Omega$	-	100	-	V/mV
cmrr	CMRR	$V_{CM}=0\text{V}, V_o=0\text{V}$	80	86	-	dB
supply voltage rejection ratio	PSRR	$V_{CC}=\pm 9\text{V to } \pm 15\text{V}$	80	90	-	dB
gain bandwidth product	GBWP		-	3	-	MHz
slew rate	SR	$G=+1$	8	13	-	V/ μS
input impedance	R_i		-	10^{12}	-	Ω



Typical application

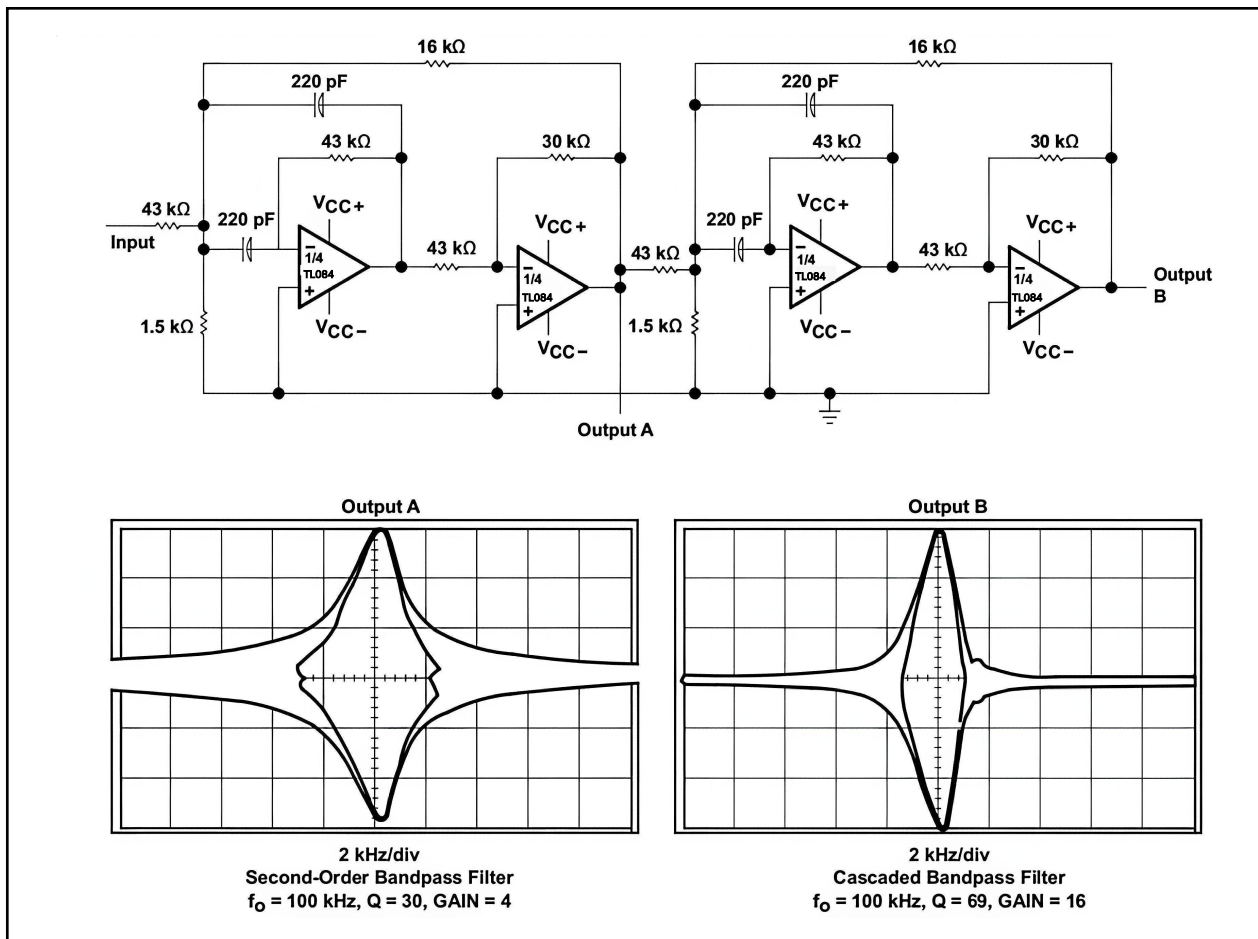


Figure 1 Positive feedback bandpass filter

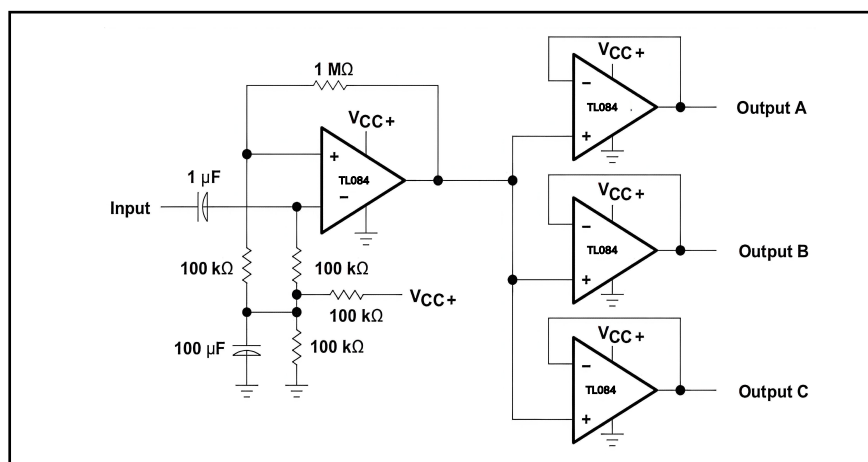


Figure 2 Audio distribution amplifier



Characteristic curve

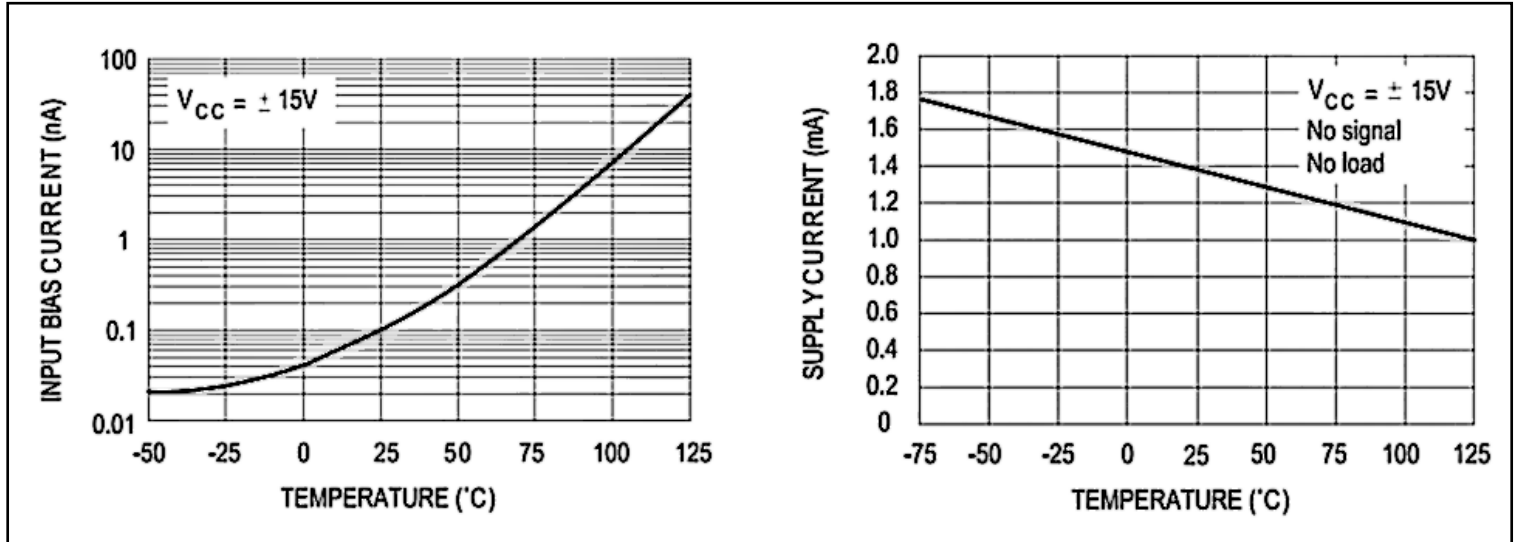


Figure 3 Relationship between input bias current and ambient temperature

Figure 4 Power supply current vs. ambient temperature (per channel)

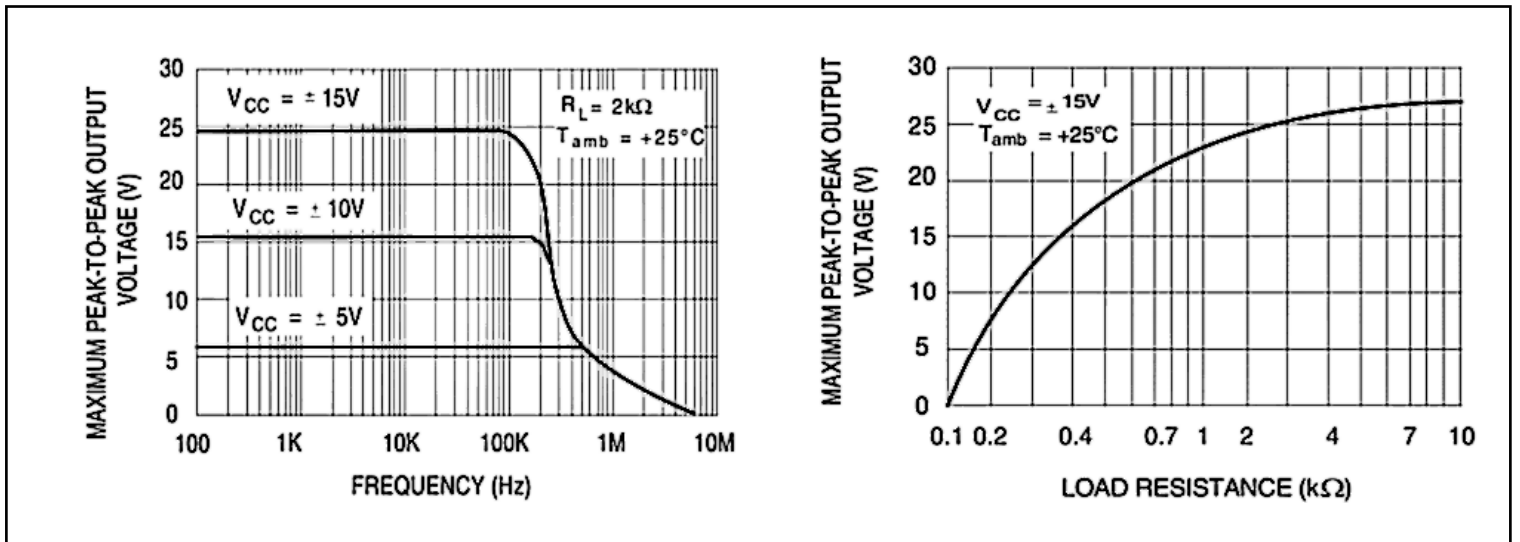


Figure 5 Relationship between maximum output voltage swing and frequency





Fig. 6 Relationship between maximum output voltage swing and load



Order information




Order Number	Package	Package Quantity	Marking On The park	Temperature
TL084BCN-TUDI	DIP14	Tube,25,A box of 1000	TL084BCN	0°C to +70°C
TL084BCDT-TUDI	SOP14	Tape,Reel,4000	084BC	
TL084BCPT-TUDI	TSSOP14	Tape,Reel,4000	084BC	
TL084BIN-TUDI	DIP14	Tube,25,A box of 1000	TL084BIN	-40°C to +85°C
TL084BIDT-TUDI	SOP14	Tape,Reel,4000	084BI	
TL084BIPT-TUDI	TSSOP14	Tape,Reel,4000	084BI	
TL084BMN-TUDI	DIP14	Tube,25,A box of 1000	TL084BMN	-40°C to +125°C
TL084BMDT-TUDI	SOP14	Tape,Reel,4000	084BM	
TL084BMPT-TUDI	TSSOP14	Tape,Reel,4000	084BM	

Package SOP14

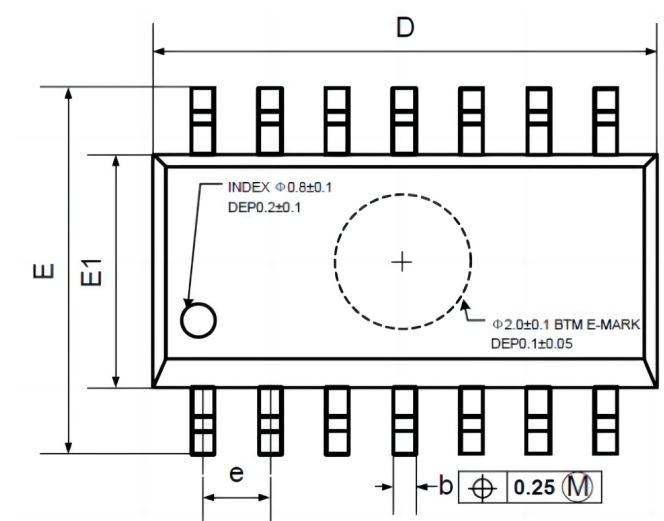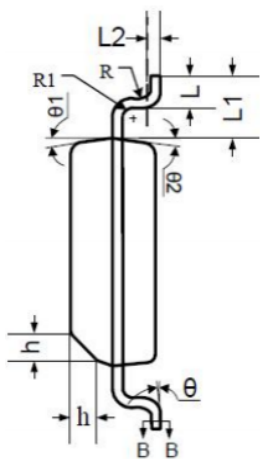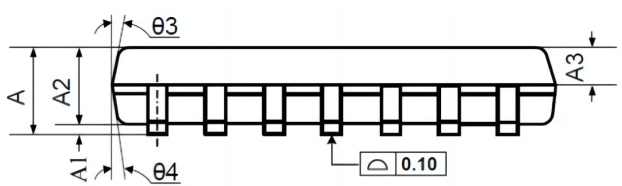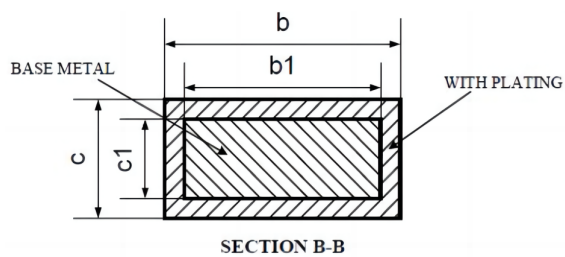

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	1.35	1.60	1.75
A1	0.10	0.15	0.25
A2	1.25	1.45	1.65
A3	0.55	0.65	0.75
b	0.36		0.49
b1	0.35	0.40	0.45
C	0.16		0.25
c1	0.15	0.20	0.25
D	8.53	8.63	8.73
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
e	1.27 BSC		
L	0.45	0.60	0.80
L1	1.04 REF		
L2	0.25 BSC		
R	0.07		
R1	0.07		
h	0.30	0.40	0.50
θ	0°		8°
θ1	6°	8°	10°
θ2	6°	8°	10°
θ3	5°	7°	9°
θ4	5°	7°	9°




Package TSSOP14

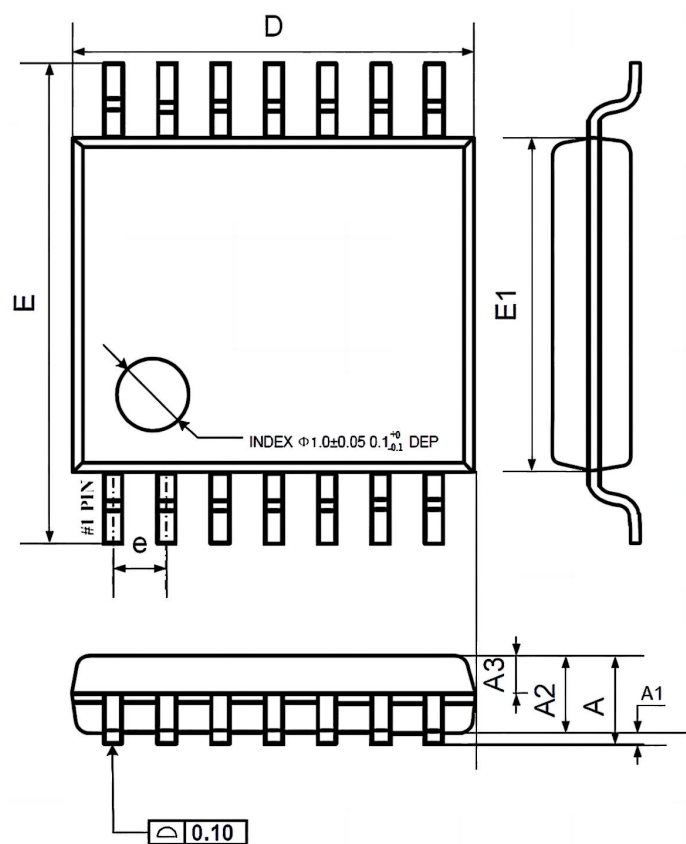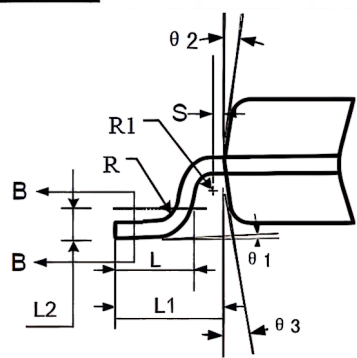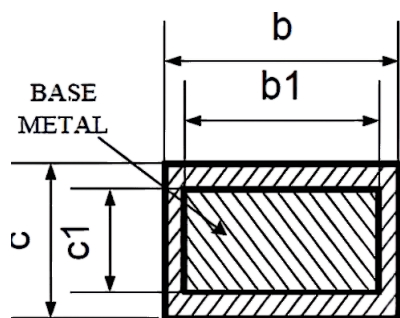

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	—	—	1.20
A1	0.05	—	0.15
A2	0.90	1.00	1.05
A3	0.34	0.44	0.54
b	0.20	—	0.28
b1	0.20	0.22	0.24
C	0.10	—	0.19
c1	0.10	0.13	0.15
D	4.86	4.96	5.06
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	0.65 BSC		
L	0.45	0.60	0.75
L1	1.00 REF		
L2	0.25 BSC		
R	0.09	—	—
R1	0.09	—	—
S	0.20	—	—
θ1	0°	—	8°
θ2	10°	12°	14°
θ3	10°	12°	14°



Package DIP14

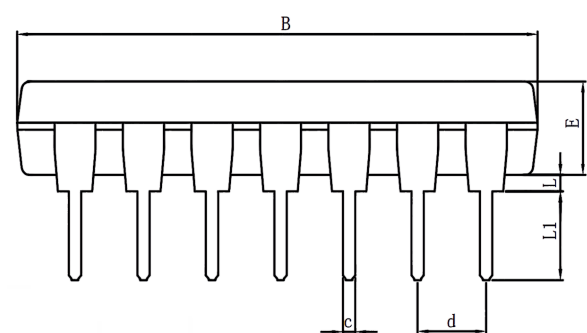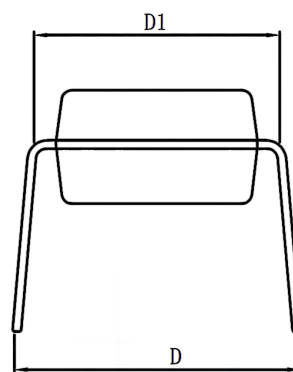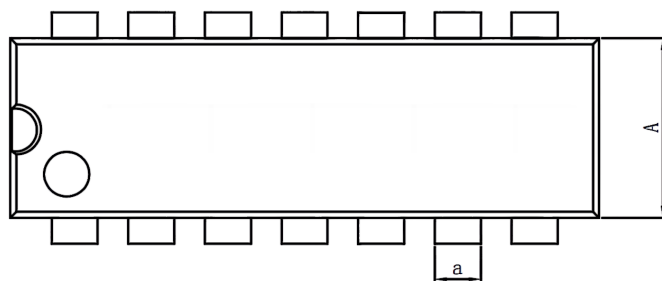

DIM.	MIN	TYP	MAX	DIM.	MIN	TYP	MAX
A	6.100	6.300	6.680	a	1.504	1.524	1.544
B	18.940	19.200	19.560	C	0.437	0.457	0.477
D	8.200	8.700	9.200	d	2.530	2.540	2.550
D1	7.42	7.62	7.82	L	0.500	—	0.800
E	3.100	3.300	3.550	L1	3.000	3.200	3.600



Important statement:

- TUDI Semiconductor reserves the right to modify the product manual without prior notice! Before placing an order, customers need to confirm whether the obtained information is the latest version and verify the completeness of the relevant information.
- Any semi-guide product is subject to failure or malfunction under specified conditions. It is the buyer's responsibility to comply with safety standards when using TUDI Semiconductor products for system design and whole machine manufacturing. And take the appropriate safety measures to avoid the potential in the risk of loss of personal injury or loss of property situation!
- TUDI Semiconductor products have not been licensed for life support, military, and aerospace applications, and therefore TUDI Semiconductor is not responsible for any consequences arising from the use of this product in these areas.
- If any or all TUDI Semiconductor products (including technical data, services) described or contained in this document are subject to any applicable local export control laws and regulations, they may not be exported without an export license from the relevant authorities in accordance with such laws.
- The specifications of any and all TUDI Semiconductor products described or contained in this document specify the performance, characteristics, and functionality of said products in their standalone state, but do not guarantee the performance, characteristics, and functionality of said products installed in Customer's products or equipment. In order to verify symptoms and conditions that cannot be evaluated in a standalone device, the Customer should ultimately evaluate and test the device installed in the Customer's product device.
- TUDI Semiconductor documentation is only allowed to be copied without any alteration of the content and with the relevant authorization. TUDI Semiconductor assumes no responsibility or liability for altered documents.
- TUDI Semiconductor is committed to becoming the preferred semiconductor brand for customers, and TUDI Semiconductor will strive to provide customers with better performance and better quality products.