



REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	15MAY2019	H.X	I.Y

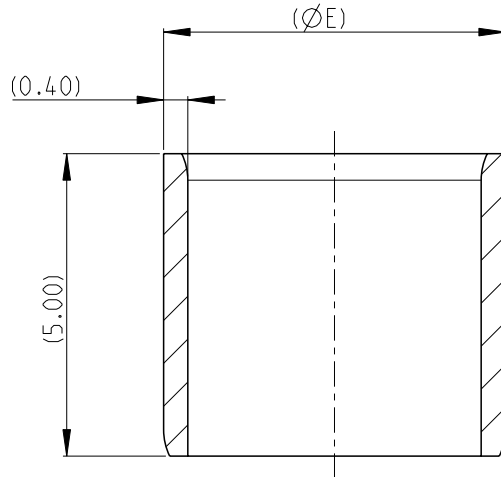

SCALE 4:1

1 MATERIAL TYPE: COPPER ALLOY


2 FINISH: BARE

3. PARTS MUST BE FREE OF BURRS, CRACKS, OR OTHER VISUAL IMPERFECTIONS THAT MAY AFFECT FIT FORM OR FUNCTION

4. THE FUNCTION OF THE INNER FERRULE IS TO PROVIDE MECHANICAL SUPPORT TO THE OUTER FERRULE IN THE WIRE SHIELD CRIMP APPLICATION. THE INNER FERRULE DOES NOT HAVE AN ELECTRICAL FUNCTION AND IS NOT PLATED. SURFACE DISCOLORATION FROM MANUFACTURING PROCESS OR ENVIROMENTAL EXPOSURE DOES NOT IMPACT PRODUCT FUNCTION.

© copyright -date

5.41	6.10	7.00	2350495-3
4.76	5.41	6.30	2350495-2
4.11	4.76	5.70	2350495-1
MIN	MAX	E	PART NO
WIRE O.D.			

DIMENSIONS:		DWN H.XIA	15MAY2019	MATERIAL		1		FINISH		2			
mm		CHK E.JIANG	15MAY2019	TE Connectivity									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD I.YIN	15MAY2019										
0 PLC ±- 1 PLC ±0.2 2 PLC ±0.10 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±-		PRODUCT SPEC		NAME INNER FERRULE, HVA280									
		108-2394											
		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO									
		114-13259											
		WEIGHT		A 4		00779		C-2350495		-			
		-											
CUSTOMER DRAWING						SCALE		8:1		SHEET 1 OF 1		REV A	